

Total Maximum Daily Load
Evaluation
for
Wasp Creek
in the
Flint River Basin
For Sediment
(Biota Impacted)

Submitted to:

The U.S. Environmental Protection Agency
Region 4
Atlanta, Georgia

Submitted by:

The Georgia Department of Natural Resources
Environmental Protection Division
Atlanta, Georgia

January 2008

Table of Contents

<u>Section</u>	<u>Page</u>
EXECUTIVE SUMMARY	iv
1.0 INTRODUCTION	1
1.1 Background	1
1.2 Watershed Description	1
1.3 Water Quality Standard	4
2.0 WATER QUALITY ASSESSMENT	17
2.1 Fish Sampling	17
3.0 SOURCE ASSESSMENT	36
3.1 Point Source Assessment	36
3.2 Nonpoint Source Assessment	39
4.0 MODELING APPROACH	44
4.1 Model Selection	44
4.2 Universal Soil Loss Equation	44
4.3 WCS Sediment Tool	49
5.0 TOTAL MAXIMUM DAILY LOADS	51
5.1 Waste Load Allocations	51
5.2 Load Allocations	52
5.3 Seasonal Variation	52
5.4 Margin of Safety	52
5.5 Total Sediment Load	61
6.0 RECOMMENDATIONS	63
6.1 Monitoring	63
6.2 Sediment Management Practices	63
6.3 Reasonable Assurance	70
6.4 Public Participation	70
7.0 INITIAL TMDL IMPLEMENTATION PLAN	71
REFERENCES	75

List of Tables

1. Summary of Current Conditions in the Flint River Basin
2. Total Annual Sediment Loads and the Required Sediment Reduction
3. 303(d) Listed Stream Segments Located in the Flint River Basin
4. Land Use Distribution
5. Land Use Percentages
6. Soil Type Distribution
7. 1998-2003 WRD's Fish Community Study Scores
8. 1998-2003 WRD's Habitat Assessment Scores
9. 1998-2003 WRD's Field Measurements
10. NPDES Permit Limits for Facility in the Impaired Watershed of the Flint River Basin
11. Industrial Facilities with a General Storm Water NPDES Permit in the Flint River Basin
12. Phase I Permitted MS4s in the Flint River Basin
13. Phase II Permitted MS4s in the Flint River Basin
14. Percentage of Watersheds Occurring in MS4 Areas
15. Percent Timberland and Percent Harvested per Year by County
16. R Factors by County
17. Forest, Cropland and Pastureland C Factors by County
18. Road C Factors
19. Various Land Use C Factors
20. Waste Load Allocations for Permits with TSS Limits
21. Sediment Load Allocations
22. Sediment Load Percentages
23. Georgia Meteorological Rainfall Statistics
24. Total Annual Sediment Loads and the Required Sediment Load Reductions

List of Figures

1. Impaired and Unimpaired Watersheds Monitored in the Flint River Basin

Appendix

- A: Annual Average Sediment Load Summary Memorandum

EXECUTIVE SUMMARY

The State of Georgia assesses its water bodies for compliance with water quality standards criteria established for their designated uses as required by the Federal Clean Water Act (CWA). Assessed water bodies are placed into three categories, supporting, partially supporting, or not supporting their designated uses, depending on water quality assessment results. These water bodies are found on Georgia's 305(b) list, as required by that section of the CWA that defines the assessment process, and are published in *Water Quality in Georgia* (GA EPD, 2000-2001).

Some of the 305(b) partially and not supporting water bodies are also assigned to Georgia's 303(d) list, also named after that section of the CWA. Water bodies on the 303(d) list are required to have a Total Maximum Daily Load (TMDL) evaluation for the water quality constituent(s) in violation of the water quality standard. The TMDL process establishes the allowable pollutant loadings or other quantifiable parameters for a water body based on the relationship between pollutant sources and in-stream water quality conditions. This allows water quality-based controls to be developed to reduce pollution and restore and maintain water quality.

The State of Georgia has identified one stream segment located in the Flint River Basin as water quality limited (i.e. 303(d) listed as Biota Impacted) due to sedimentation. The water use classification of the impacted stream is Fishing. The general water quality criteria not being met states:

All waters shall be free from material related to municipal, industrial or other discharges which produce turbidity, color, odor or other objectionable conditions which interfere with legitimate water uses.

The Biota Impacted designation indicates that studies have shown a modification of the biological community; more specifically, fish. During 1998-2003, the Department of Natural Resources (DNR) Wildlife Resources Division (WRD) conducted studies of fish populations in the Flint River Basin. WRD used the Index of Biotic Integrity (IBI) and modified Index of Well-Being (IWB) to identify affected fish populations. The IBI and IWB values were used to classify the populations as Excellent, Good, Fair, Poor, or Very Poor. Stream segments with fish populations rated as Poor or Very Poor were listed as Biota Impacted, and were included in the partially supporting or not supporting list. The Wasp Creek stream segment was rated as Very Poor, placed on the 303(d) list as partially supporting its designated use, and scheduled for this TMDL evaluation (Table 3). Ten (10) stream segments in the Piedmont ecoregion were rated as Excellent, Good or Fair and assessed as supporting their designated water use.

The general cause of low IBI scores is the lack of fish habitat due to stream sedimentation. To determine the relationship between the in-stream water quality and the source loadings, each watershed was modeled. The analysis performed to develop sediment TMDLs for the 303(d) listed watersheds utilized the Universal Soil Loss Equation (USLE). The USLE predicts the total annual soil loss caused by erosion. The USLE method considered the characteristics of the watershed including land use, soil type, ground slope, and road surface. National Pollutant Discharge Elimination System (NPDES) permitted discharges were also considered. Modeling assumptions were considered conservative and provide the necessary implicit margin of safety for the TMDL.

The USLE was applied to the partially supporting 303(d) listed watershed, as well as the unimpaired watersheds in the same ecoregion, to determine both the existing sediment loading rates and the sediment load reductions needed to support beneficial use (i.e., unimpacted conditions). The average sediment load in the watershed listed on the partially supporting list located in the Piedmont

ecoregion is 0.05 tons/acre/yr. The average sediment load of the Flint River unimpaired watersheds located within the Piedmont ecoregion is 0.08 tons/acre/yr. This value represents sediment load contributions from all land uses within the unimpaired watershed. Note that the average annual sediment loads for both watershed groups are generally within the same range.

Table 1 shows that approximately 43.73 percent of the average sediment load in the Flint River Basin results from pastureland with an average sediment load of 0.57 tons/acre/yr. Approximately 25.75 percent of the total sediment load is from roads. Grasses and wetlands make up about 17.28 percent of the total sediment load, urban land contributes approximately 6.43 percent of the total sediment load, and forest areas contribute approximately 4.40 percent of the total sediment load. Estimates of the sediment contribution from construction are not available, but could represent a relatively high sediment load per acre.

Table 1. Summary of Current Conditions in the Flint River Basin

Land Use	Average Percent Land Use	Average Percent Sediment Load	Average Sediment Load (tons/acre/yr)
Open Water	1.02%	0.00%	0.00
Urban	3.15%	6.43%	1.49
Bare Rock, Sand and Clay	0.60%	0.00%	0.00
Quarries, Strip Mines, Gravel Pits	0.01%	1.77%	1.20
Forest	61.31%	4.40%	0.04
Pasture/Hay	24.09%	43.73%	0.57
Row Crops	0.08%	0.52%	3.02
Grasses, Wetland	9.74%	17.28%	2.55
Roads		25.75%	

These data indicate that agricultural lands are the major source of sediment to our rivers and streams. However, over the last century there has been a dramatic decrease in the amount of land farmed in Georgia. Since 1950, there has been a 57 percent reduction in farmland. With the reduction in farmland, there has also been a decrease in the amount of soil erosion. This suggests that the sedimentation observed in the impaired stream segments may be legacy sediment resulting from past land use practices. It is believed that if sediment loads are maintained at acceptable levels, streams will repair themselves over time.

This TMDL determines the sediment loads that can enter the impaired Flint River Basin streams without causing sediment impairment to the streams. This is based on the hypothesis that if an impaired watershed has a total annual sediment loading rate similar to a biologically unimpaired watershed, then the receiving stream will remain stable and not be biologically impaired due to sediment. The total annual sediment load in the Flint River Basin unimpaired watersheds located in the Piedmont ecoregion is 0.08 tons/acre/yr. The total annual sediment loads and maximum daily sediment load for the impaired watersheds are summarized in Table 2, along with any required sediment load reductions.

Table 2. Sediment Loads and the Required Sediment Reduction

Name	Current Load (tons/yr)	WLA (tons/yr)	WLASw (tons/yr)	LA (tons/yr)	Allowable Total Load (tons/yr)	Allowable Maximum Daily Load (tons/day)	% Reduction
Wasp Creek	43.6	0.3	5.4	37.1	42.8	5.5	0.0%

Management practices that may be used to help maintain the annual average sediment loads at current levels include:

- Compliance with the requirements of the NPDES permit program;
- Implementation of GFC Best Management Practices for forestry;
- Adoption of NRCS Conservation Practices;
- Adherence to the Mined Land Use Plan prepared as part of the Surface Mining Permit Application;
- Adoption of proper unpaved road maintenance practices;
- Implementation of Erosion and Sedimentation Control Plans for land disturbing activities; and
- Evaluation of the effects of increased flow due to urban runoff on stream bank erosion.

Though the measurement of sediment delivered to a stream is difficult to determine, by monitoring the implementation of these practices, their anticipated effects will contribute to improving stream habitats and water quality, and thus be an indirect measurement of the TMDLs.

1.0 INTRODUCTION

1.1 Background

The State of Georgia assesses its water bodies for compliance with water quality standards criteria established for their designated uses as required by the Federal Clean Water Act (CWA). Assessed water bodies are placed into three categories, supporting, partially supporting, or not supporting their designated uses, depending on water quality assessment results. These water bodies are found on Georgia's 305(b) list, as required by that section of the CWA that addresses the assessment process, and are published in *Water Quality in Georgia* (GA EPD, 2000-2001).

Some of the 305(b) partially and not supporting water bodies are also assigned to Georgia's 303(d) list, also named after that section of the CWA. Water bodies on the 303(d) list are required to have a Total Maximum Daily Load (TMDL) evaluation for the water quality constituent(s) in violation of the water quality standard. The TMDL process establishes the allowable loading of pollutants or other quantifiable parameters for a water body based on the relationship between pollution sources and in-stream water quality conditions. This allows water quality based controls to be developed to reduce pollution and restore and maintain water quality.

During 1998-2003, the Department of Natural Resources (DNR) Wildlife Resources Division (WRD) conducted studies of fish populations in the Flint River Basin. WRD used the Index of Biotic Integrity (IBI) and modified Index of Well-Being (IWB) to identify affected fish populations. The IBI and IWB values were used to classify the populations as Excellent, Good, Fair, Poor, or Very Poor. Stream segments with fish populations rated as Poor or Very Poor were listed as Biota Impacted, and were included in the partially supporting or not supporting list. Wasp Creek was rated as Very Poor, placed on the 303(d) list as partially supporting their designated use, and scheduled for TMDL evaluation (Table 3). Ten stream segments in the Piedmont ecoregion were rated as Excellent, Good or Fair and assessed as supporting their designated water use.

Table 3. 303(d) Listed Stream Segment Located in the Flint River Basin

Stream	Status	Location	Miles
Wasp Creek	Partially Supporting	Headwaters to Little Wasp Creek	5

1.2 Watershed Description

The one impaired stream segment is located in the Flint River Basin is located in Spalding and Pike Counties. The unimpaired watersheds are located in the following counties: Crawford, Harris, Lamar, Meriwether, Monroe, Pike, Spalding, Talbot, and Upson.

The land use characteristics of the Flint River Basin watersheds were determined using data from Georgia's National Land Cover Data (NLCD). This coverage is based on Landsat Thematic Mapper digital images developed in 2001. The classification is based on a modified Anderson level one and two system. Table 4 lists the land use distribution of the watersheds located in the Piedmont ecoregion. The watersheds are grouped by those that are unimpaired, followed by those that are impaired. Table 5 lists the land use percentages for all the Flint River Basin watersheds monitored in a similar fashion. The data show that the watersheds are predominately forested with approximately 63.18 percent (ranging from 35.83 to 81.99 percent) in forest use. Agriculture is the next predominate land use at approximately 16.2%, consisting of approximately 24.09 percent

pastureland (ranging from 13.54 to 38.69 percent) and approximately 0.08 percent row crops (ranging from 0.0 to 0.37 percent).

The soil characteristics of the Flint River Basin watersheds were determined using data from the State Soil Geographic (STATSGO) coverage. This coverage provides major soil type classifications. Table 6 lists the soil type distribution of the monitored watersheds.

1.3 Water Quality Standard

The water use classification for the impaired watershed in the Flint River Basin is Fishing. The criterion violated is listed as Biota Impacted, which indicates that studies have shown a significant impact on fish. The potential cause listed is nonpoint sources. The narrative standard exists to prevent objectionable conditions that interfere with legitimate water uses, as stated in Georgia's *Rules and Regulations for Water Quality Control*, Chapter 391-3-6-.03(5)(c):

All waters shall be free from material related to municipal, industrial or other discharges which produce turbidity, color, odor or other objectionable conditions which interfere with legitimate water uses.

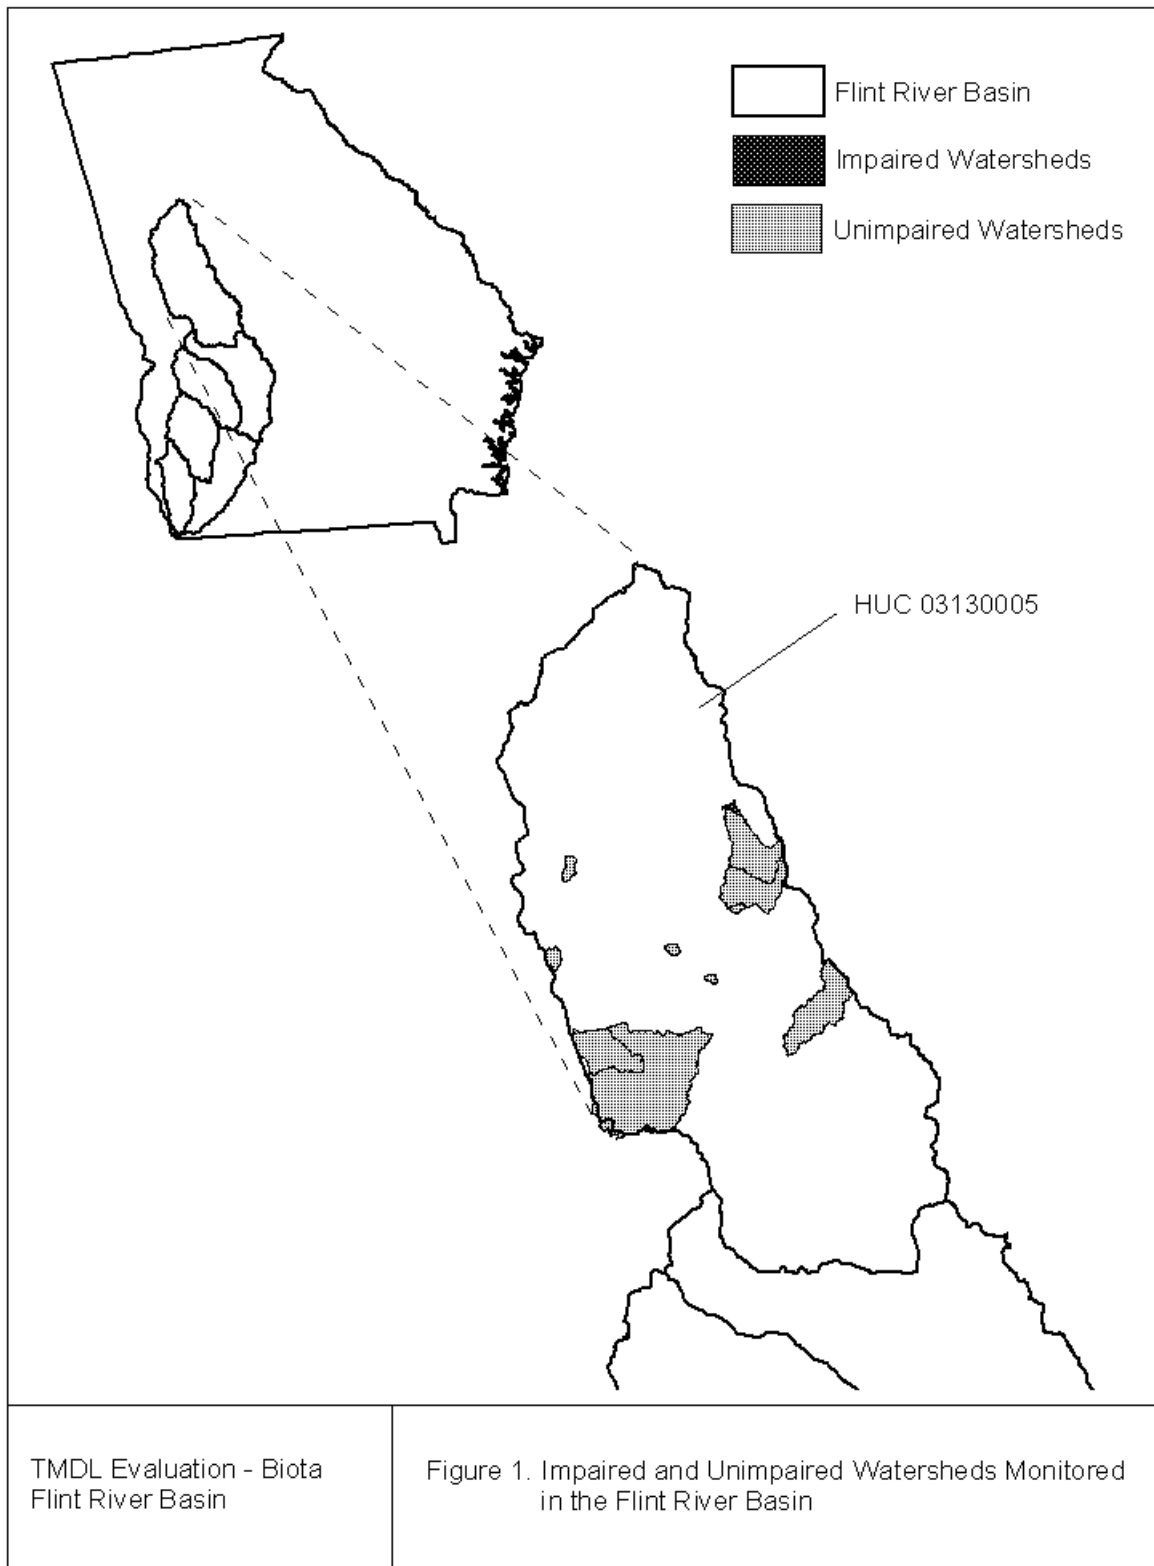


Table 3. Land Use Distribution (Unimpaired – Piedmont Ecoregion)

Area (acres)																
Name	Open Water	Low Intensity Residential	High Intensity Residential	High Intensity Commercial Industrial Transportation	Bare Rock Sand and Clay	Quarries Strip Mines Gravel Pits	Deciduous Forest	Evergreen Forest	Mixed Forest	Deciduous Shrubland	Pasture/Hay	Row Crops	Other Grasses (Urban Recreational)	Woody Wetland	Total	
Auchumpkee Creek	111.0	34.5	4.9		89.0	0.2	7,082.4	11,936.0	403.6	643.6	4,784.0	4.4	433.4	1,328.1	26,855.0	
Baroucho Creek	8.2	0.4	0.9		6.2		388.5	223.9	13.1	42.5	116.8		12.7	1.6	814.8	
Brittens Creek	12.0	7.6			39.8		637.1	576.0	13.6	50.5	858.0		50.7	111.0	2,356.2	
Five Mile Creek	5.6	14.2	3.6		2.9		321.8	259.7	4.0	6.4	281.5	0.9	43.8	14.2	958.7	
Kendall Creek	54.0	1.3					783.7	1,063.9	17.8	50.5	322.9		31.8	59.2	2,385.1	
Lazer Creek	134.3	135.4	14.0	1.1	92.5		7,451.5	6,721.6	69.2	616.7	3,750.1	32.7	836.8	449.4	20,305.5	
Big Lazer Creek	560.0	536.0	46.5	5.1	681.4		37,996.8	37,122.8	620.2	2,219.6	19,520.0	43.4	3,671.4	4,003.2	107,026.0	
Mock Woodall Branch	6.0	5.8	1.1		4.9		696.5	164.6	10.0	4.0	244.0	1.6	26.9	9.6	1,174.9	
Potato Creek u/s	772.3	1,947.4	508.2	245.3	154.1	11.6	9,900.7	8,007.0	610.9	370.7	11,336.6	35.1	3,132.3	2,005.0	39,037.4	
Potato Creek d/s	1,132.2	2,109.1	535.7	250.0	303.6	11.6	14,975.8	11,364.2	960.0	624.0	19,153.7	109.4	3,922.0	3,789.5	59,240.8	

Table 3. Land Use Distribution (Impaired – Piedmont Ecoregion)

Area (acres)																
Name	Open Water	Low Intensity Residential	High Intensity Residential	High Intensity Commercial Industrial Transportation	Bare Rock Sand and Clay	Quarries Strip Mines Gravel Pits	Deciduous Forest	Evergreen Forest	Mixed Forest	Deciduous Shrubland	Pasture/Hay	Row Crops	Other Grasses (Urban Recreational)	Woody Wetland	Total	
Wasp Creek u/s	15.8	68.5	43.1	20.7			114.8	113.4	6.9	7.3	207.9		56.3	21.8	676.5	
Wasp Creek d/s	15.8	80.1	43.4	21.3	1.8		145.2	140.3	8.0	8.9	229.5		75.2	23.6	793.0	

Table 4. Land Use Percentages (Unimpaired – Piedmont Ecoregion)

Name	Percent Total Land Use													
	Open Water	Low Intensity Residential	High Intensity Residential	High Intensity Commercial Industrial Transportation	Bare Rock Sand and Clay	Quarries Strip Mines Gravel Pits	Deciduous Forest	Evergreen Forest	Mixed Forest	Deciduous Shrubland	Pasture/Hay	Row Crops	Other Grasses (Urban Recreational)	Woody Wetland
Auchumpkee Creek	0.4%	0.1%	0.0%	0.0%	0.3%	0.0%	26.4%	44.4%	1.5%	2.4%	17.8%	0.0%	1.6%	4.9%
Baroucho Creek	1.0%	0.1%	0.1%	0.0%	0.8%	0.0%	47.7%	27.5%	1.6%	5.2%	14.3%	0.0%	1.6%	0.2%
Brittens Creek	0.5%	0.3%	0.0%	0.0%	1.7%	0.0%	27.0%	24.4%	0.6%	2.1%	36.4%	0.0%	2.2%	4.7%
Five Mile Creek	0.6%	1.5%	0.4%	0.0%	0.3%	0.0%	33.6%	27.1%	0.4%	0.7%	29.4%	0.1%	4.6%	1.5%
Kendall Creek	2.3%	0.1%	0.0%	0.0%	0.0%	0.0%	32.9%	44.6%	0.7%	2.1%	13.5%	0.0%	1.3%	2.5%
Lazer Creek	0.7%	0.7%	0.1%	0.0%	0.5%	0.0%	36.7%	33.1%	0.3%	3.0%	18.5%	0.2%	4.1%	2.2%
Big Lazer Creek	0.5%	0.5%	0.0%	0.0%	0.6%	0.0%	35.5%	34.7%	0.6%	2.1%	18.2%	0.0%	3.4%	3.7%
Mock Woodall Branch	0.5%	0.5%	0.1%	0.0%	0.4%	0.0%	59.3%	14.0%	0.9%	0.3%	20.8%	0.1%	2.3%	0.8%
Potato Creek u/s	2.0%	5.0%	1.3%	0.6%	0.4%	0.0%	25.4%	20.5%	1.6%	0.9%	29.0%	0.1%	8.0%	5.1%
Potato Creek d/s	1.9%	3.6%	0.9%	0.4%	0.5%	0.0%	25.3%	19.2%	1.6%	1.1%	32.3%	0.2%	6.6%	6.4%

Table 4. Land Use Percentages (Unimpaired – Piedmont Ecoregion)

Name	Percent Total Land Use													
	Open Water	Low Intensity Residential	High Intensity Residential	High Intensity Commercial Industrial Transportation	Bare Rock Sand and Clay	Quarries Strip Mines Gravel Pits	Deciduous Forest	Evergreen Forest	Mixed Forest	Deciduous Shrubland	Pasture/Hay	Row Crops	Other Grasses (Urban Recreational)	Woody Wetland
Wasp Creek u/s	2.3%	10.1%	6.4%	3.1%	0.0%	0.0%	17.0%	16.8%	1.0%	1.1%	30.7%	0.0%	8.3%	3.2%
Wasp Creek d/s	2.0%	10.1%	5.5%	2.7%	0.2%	0.0%	18.3%	17.7%	1.0%	1.1%	28.9%	0.0%	9.5%	3.0%

Table 5. Soil Type Distribution (Unimpaired – Piedmont Ecoregion)

NAME	Drainage Area (sq miles)	GA101	GA041	GA034	GA031	GA030	GA026	GA025
K-Factor		0.25	0.17	0.25	0.24	0.27	0.25	0.27
Auchumpkee Creek	41.96				781.8		19,613.5	6,459.7
Baroucho Creek	1.27			219.7			102.1	493.0
Brittens Creek	3.68	542.5						1,813.7
Five Mile Creek	1.50			382.6				576.1
Kendall Creek	3.73							2,385.10
Lazer Creek	31.73			3059.3			7,823.8	9,422.4
Big Lazer Creek	167.23		217.9	8844.1		154.4	46,308.0	51,501.9
Mock Woodall Branch	1.84			103.1				1,071.8
Potato Creek u/s	61.00	944.9						38,092.5
Potato Creek d/s	92.56	2718.8		1364.1				55,157.8

Table 5. Soil Type Distribution (Impaired – Piedmont Ecoregion)

NAME	Drainage Area (sq miles)	GA101	GA041	GA034	GA031	GA030	GA026	GA025
K-Factor		0.25	0.17	0.25	0.24	0.27	0.25	0.27
Wasp Creek u/s	1.06							676.5
Wasp Creek d/s	1.24							793.0

2.0 WATER QUALITY ASSESSMENT

2.1 Fish Sampling

From 1998-2003, the Department of Natural Resources (DNR) Wildlife Resources Division (WRD) conducted studies of fish populations at a number of monitoring sites in the Flint River Basin. Biological monitoring is a method used to evaluate the health of a biological system in order to assess degradation from various sources. It is based on direct observations of aquatic communities. The results of these studies were the basis for the listing of Biota Impacted stream segments on Georgia's 303(d) list. Stream segments with fish populations rated as Poor or Very Poor were listed as Biota Impacted.

The work performed by the WRD looked at patterns of fish communities within the various ecoregions. An ecoregion is a region of relative homogeneity in ecological systems or in relationships between organisms and their environment. Seven major ecoregions have been identified in Georgia based upon soil types, potential natural vegetation, land surface form, and predominant land uses. These include the Blue Ridge Mountains, Ridge and Valley, Southwestern Appalachians, Piedmont, Middle Atlantic Coastal Plain, Southeastern Plains, and Southern Coastal Plain.

Reference sites within the Piedmont ecoregion were established. These sites represented the least impacted sites that exist given the prevalent land use within the ecoregion. Twelve (12) sites were sampled within the Flint River Basin in this ecoregion (see Tables 7, 8, and 9). These sites had to be accessible, wadeable, and representative of the stream under investigation. The length of the fish sampling site was thirty-five times the mean stream width, up to 500 meters. This sampling length was found to be long enough to include the major habitat types present. Electrofishing and seining techniques were used for sampling the fish population (GAWRD, 2000).

Two indices of fish community health were used to assess the biotic integrity of the aquatic systems: the modified Index of Well-Being (IWB) and the Index of Biotic Integrity (IBI). The IWB and IBI scores were classified as Excellent, Good, Fair, Poor, or Very Poor. Segments with fish populations rated as Poor or Very Poor were listed as Biota Impacted.

The modified IWB measures the health of the aquatic community based on the density and diversity or structural attributes of the fish community. The IWB is calculated based on four parameters: the relative density of fish, the relative biomass of fish, the Shannon-Wiener Index of Diversity based on number, and the Shannon-Wiener Index of Diversity based on biomass.

The IBI assesses the biotic integrity of aquatic communities based on the functional and compositional attributes of the fish community. The IBI consists of twelve measurements or metrics, which assess three facets of the fish population: species richness and composition, trophic composition and dynamics, and fish abundance and condition. Each metric is scored by comparing its value to the value of the regional reference site. Factors that affect the structure and function of a fish community include stream location and size. Thus, the metrics were developed for regional drainage basins, e.g. the Apalachicola drainage basin, which includes the Chattahoochee and Flint River Basins. To account for the fact that streams with larger drainage basins normally have greater species richness, Maximum Species Richness plots were developed for the species richness metric (GAWRD, 2000).

To supplement the findings of the fish community data, habitat assessments were performed at each sampling site. Habitat scores evaluate the physical surroundings of a stream as they affect

and influence the quality of the water resource and its resident aquatic community. These data may also help clarify the results of the biotic indices. The habitat assessment used was developed by personnel within the Watershed Protection Branch (WPB) of GA EPD and is a modification of the EPA Rapid Bioassessment Protocol III (GAWPB, 2000). It incorporates different assessment parameters for riffle / run prevalent streams. The habitat assessment evaluates the stream's physical parameters and is broken into three levels. Level one describes in-stream characteristics that directly affect biological communities (in-stream cover, epifaunal substrate, embeddedness, and riffle frequency). Level two describes the channel morphology (channel alteration, sediment deposition, and channel flow status). Level three describes the riparian zone surrounding the stream, which indirectly affects the type of habitat and food resources available in the stream (bank vegetation, bank stability, and riparian zone width). The total habitat scores obtained for each sampling station are compared to a site-specific control or regional reference site. The ratio between the station of interest and the reference site provides a percent comparability that can be used to classify the stream.

Table 7 summarizes WRD's fish community study scores. The IBI, IWB, and Habitat Assessment scores are listed and the watersheds are grouped by the unimpaired watersheds in the Piedmont ecoregion, followed by the impaired watersheds in the Piedmont ecoregion. In addition, the table includes the drainage areas upstream of the monitoring points and the county in which the monitoring points are located. Table 8 provides the detailed habitat assessment scores.

During the fish community studies, physical characteristics of the stream were measured at the monitoring sites. These characteristics included the number of pools, depth of the deepest pool, number of riffles, average stream depth, and average stream width. In addition, stream water quality measurements were taken at the time of the fish sampling. The parameters measured included water temperature, dissolved oxygen, conductivity, pH, turbidity, total hardness and alkalinity. Table 9 provides a summary of these field measurements.

Visual observations of the stream and watershed were also made by WRD personnel. The type of land use and the extent of land-disturbing activities and other pertinent features of the watershed were systematically observed from all available road accesses and were recorded. This information was used to determine the possible sources of eroded soils and other possible contaminants.

Table 7. 1998-2003 WRD's Fish Community Study Scores (Unimpaired – Piedmont Ecoregion)

Stream Name	Drainage Area upstream from the monitoring point (sq mile)	County	Date	IBI Score	IBI Category	IWB Score	IWB Category	Habitat Total
Auchumpkee Creek	43.08	Upson	9/9/1999	50	Good	8.7	Good	64.0
Baroucho Creek	1.31	Upson	5/27/1998	34	Fair	6.3	Fair	133.3
Brittens Creek	3.76	Meriwether	8/28/1998	52	Excellent	9	Excellent	146.7
Brittens Creek	3.76	Meriwether	8/31/1999	40	Fair	7.4	Good	141.0
Brittens Creek	3.76	Meriwether	9/17/2001	54	Excellent	9.3	Excellent	134.3
Five Mile Creek	1.46	Pike	5/4/1999	36	Fair	7.2	Fair	110.7
Kendall Creek	4.40	Meriwether	8/29/1998	46	Good	7.4	Good	55.3
Lazer Creek	32.30	Talbot	9/9/1999	52	Excellent	8.9	Good	118.1
Lazer Creek	32.30	Talbot	9/21/2000	52	Excellent	9.1	Good	128.0
Lazer Creek	32.30	Talbot	9/17/2001	52	Excellent	9.6	Good	130.5
Big Lazer Creek	169.60	Talbot	9/28/1999	42	Fair	8.6	Good	119.1
Mock Woodall Branch	1.93	Upson	5/21/1999	36	Fair	7.2	Fair	103.6
Potato Creek u/s	62.14	Lamar	9/20/2000	38	Fair	7.9	Fair	67.3
Potato Creek d/s	94.41	Lamar	8/2/1999	36	Fair	7.7	Fair	41.3

Table 7. 1998-2003 WRD's Fish Community Study Scores (Impaired – Piedmont Ecoregion)

Stream Name	Drainage Area upstream from the monitoring point (sq mile)	County	Date	IBI Score	IBI Category	IWB Score	IWB Category	Habitat Total
Wasp Creek u/s	1.18	Spalding	09/20/2000	32	Poor	5.7	Poor	72.8
Wasp Creek d/s	1.39	Spalding	09/20/2000	16	Very Poor	2.4	Very Poor	69.2

Table 8. 1998-2003 WRD's Habitat Assessment Scores (Unimpaired – Piedmont Ecoregion)

Stream Name	Date	Embeddedness	Channel Alteration	Sediment Deposition	Riffle Frequency	Channel Flow Status	Bank Vegetation (Left)	Bank Vegetation (Right)	Bank Stability (Left)	Bank Stability (Right)	Riparian Zone (Left)	Riparian Zone (Right)	Instream Cover / Epifaunal	Epifaunal	Velocity Depth	Habitat Total
Auchumpkee Creek	9/9/1999	0.1	17.3	4.2	0.0	7.9	3.4	4.1	3.4	3.3	4.8	5.6	9.5	0.3		64.0
Baroucho Creek	5/27/1998	8.7	11.3	11.0	11.7	15.3	7.7	7.7	7.3	8.0	9.7	9.7	8.7	16.7		133.3
Brittens Creek	9/17/2001	15.6	15.7	12.6	18.0	9.7	6.7	5.2	6.5	5.1	8.3	7.0	11.7		12.2	134.3
Brittens Creek	8/28/1998	16.0	6.0	14.0	17.3	16.0	9.0	7.7	9.0	7.3	9.7	2.3	17	15.3		146.7
Brittens Creek	8/31/1999	15.6	16.0	16.5	18.0	8.6	6.6	5.6	7.9	6.6	9.1	4.2	12.7	13.7		141.0
Five Mile Creek	5/4/1999	8.8	16.2	11.2	14.5	8.2	5.0	3.9	3.7	5.0	8.0	4.4	9.2	12.7		110.7
Kendall Creek	8/29/1998	1.3	3.7	2.3	0.0	8.7	4.7	4.7	2.7	2.7	9.0	9.0	6	0.7		55.3
Lazer Creek	9/21/2000	8.7	17.0	8.8	9.0	9.2	8.7	8.9	8.0	8.1	8.5	9.2	12.0	11.9		128.0
Lazer Creek	9/17/2001	13.5	15.9	10.9	18.0	8.7	4.7	5.9	5.2	4.9	8.9	8.0	13.3		12.7	130.5
Lazer Creek	9/9/1999	12.3	18.0	8.4	9.0	9.3	7.8	7.4	6.4	6.3	8.3	8.2	9	7.7		118.1
Big Lazer Creek	9/28/1999	10.9	17.3	12.6	0.0	9.6	7.6	7.7	7.4	7.5	9.3	7.9	11.2	10.1		119.1
Mock Woodall Branch	5/21/1999	6.0	16.7	8.2	16.0	7.4	3.8	4.6	4.6	6.0	8.1	8.1	6.2	7.8		103.6
Potato Creek u/s	9/20/2000	1.0	14.3	1.4	0.0	6.7	5.2	5.2	5.3	5.4	9.0	6.7	5.0		2.0	67.3
Potato Creek d/s	8/2/1999	1.0	11.0	0.7	0.0	7.3	2.7	2.8	2.5	2.0	3.5	2.3	3.8	1.7		41.3

Table 8. 1998-2003 WRD's Habitat Assessment Scores (Impaired – Piedmont Ecoregion)

Stream Name	Date	Embeddedness	Channel Alteration	Sediment Deposition	Riffle Frequency	Channel Flow Status	Bank Vegetation (Left)	Bank Vegetation (Right)	Bank Stability (Left)	Bank Stability (Right)	Riparian Zone (Left)	Riparian Zone (Right)	Instream Cover / Epifaunal	Epifaunal	Habitat Total
Wasp Creek u/s	9/20/2000	6.7	6.3	6.3	0.0	7.3	5.8	5.5	6.3	6.5	9.0	6.3	4.0	2.3	72.8
Wasp Creek d/s	9/20/2000	1.7	12.0	3.8	0.0	10.3	5.8	5.8	4.8	4.7	8.0	4.5	7.0	1.0	69.2

Table 9. 1998-2003 WRD's Field Measurements (Unimpaired – Piedmont Ecoregion)

Stream Name	Date	Average Stream Width (m)	Average Stream Depth (m)	Reach Length (m)	Number of Riffles	Number of Pools	Deep Pool (m)	Water Temp (deg C)	Dissolved Oxygen (mg / L)	Conductivity (uS)	pH (SU)	Turbidity (NTU)	Total Hardness (mg / L)	Alkalinity (mg / L)
Auchumpkee Creek	9/9/1999	9.00	0.48	315.0	0	9	1.5	23.2	5.86	74.80	7.22	18.50	27.0	35
Baroucho Creek	5/27/1998	2.10	0.10	73.5	7	5	0.55	20.0	8.72		6.80	14.10		
Brittens Creek	9/17/2001	4.60	0.17	161.0		3	1.05	18.6	8.78	49.00	7.00	10.30	23.0	35
Brittens Creek	8/28/1998	5.50	0.11	192.5	7	7	1.3	21.0	8.73	53.00	7.22	11.70		
Brittens Creek	8/31/1999	4.20	0.12	147.0	7	2	1.05				7.46	8.28	21.0	25
Five Mile Creek	5/4/1999	2.50	0.14	87.5	4	2	0.6	13.5	8.26	29.90		7.13	8.0	20
Kendall Creek	8/29/1998													
Lazer Creek	9/21/2000	10.20	0.43	357.0	2	8	1.5	23.4	8.38	42.40	7.00	6.91	10.0	20
Lazer Creek	9/17/2001	11.60	0.35	406.0	8	9	0	17.4	8.92	37.20	7.00	6.50	14.0	30
Lazer Creek	9/9/1999	8.70	0.35	304.5	2	5	1.02	24.0	7.66	44.30	7.45	5.80	12.0	25
Big Lazer Creek	9/28/1999	38.90	0.45	1361.5	2	18	1.65	22.2	7.79	59.90	7.38	6.50	15.0	30
Mock Woodall Branch	5/21/1999	2.60	0.13	91.0	4	1	0.5	17.2	7.94	30.10	6.74	8.54	9.0	15
Potato Creek u/s	9/20/2000	8.90	0.17	311.5	0	1	0.75	18.7	7.22	89.20	7.00	4.58	26.0	35
Potato Creek d/s	8/2/1999	12.80	0.12	448.0	0	0	0	25.3	6.17	81.20	6.93	3.82	19.0	30

Table 9. 1998-2003 WRD's Field Measurements (Unimpaired – Piedmont Ecoregion)

Stream Name	Date	Average Stream Width (m)	Average Stream Depth (m)	Reach Length (m)	Number of Riffles	Number of Pools	Deep Pool (m)	Water Temp (deg C)	Dissolved Oxygen (mg / L)	Conductivity (uS)	pH (SU)	Turbidity (NTU)	Total Hardness (mg / L)	Alkalinity (mg / L)
Wasp Creek u/s	09/20/2000	2.40	0.19	84.00	0	0	0	19.10	7.17	50.80	7.00	9.67	18.0	20
Wasp Creek d/s	09/20/2000	2.60	0.18	91.00	>30	0	0	18.10	6.68	52.80	6.80	5.67	55.0	20

3.0 SOURCE ASSESSMENT

A healthy aquatic ecosystem requires a healthy habitat. The major disturbance to stream habitats is erosion and sedimentation. As sediment is carried into the stream, it changes the stream bottom and smothers sensitive organisms. Turbidity associated with sediment loads may also impair recreational and drinking water uses (GA EPD, 1998).

A source assessment characterizes the known and suspected sources of sediment in the watershed for use in a water quality model and the development of the TMDL. The general sources of sediment are point and nonpoint sources. National Pollutant Discharge Elimination System (NPDES) permittees discharging treated wastewater are the primary point sources of sediment as total suspended solids (TSS) and / or turbidity.

Nonpoint sources of sediment are diffuse sources that cannot be identified as entering the water body at a single location. These sources generally involve land use activities that contribute sediment to streams during a rainfall runoff event. Nonpoint sources of sediment included in the source assessment analysis are:

- Silviculture,
- Agriculture,
- Grazing areas,
- Mining sites,
- Roads, and
- Urban Development.

For nonpoint sources involving silviculture, the Georgia Forestry Commission (GFC) was consulted for information and parameters regarding silviculture activities. The Natural Resources Conservation Service (NRCS) was consulted for information and parameters regarding agricultural activities.

3.1 Point Source Assessment

For purposes of this TMDL, NPDES permitted facilities will be considered point sources. Discharges from municipal and industrial NPDES permitted facilities may contribute sediment to receiving waters as TSS and / or turbidity. There is one permitted NPDES discharge identified in the Flint River Basin watershed upstream from the listed segment. Table 10 provides the permitted flow and TSS concentrations for the NPDES permittee located in the impaired Flint River Basin watershed.

Table 10. NPDES Permit Limits for Facility in the Impaired Watershed of the Flint River Basin

FACILITY	NPDES PERMIT NO	FACILITY TYPE	RECEIVING WATER	FLOW (MGD)		TSS (mg/L)		TSS Load	
				Monthly Average	Weekly Average	Monthly Average	Weekly Average	Monthly Average (lbs/day)	Annual (ton/yr)
Moose Lodge #1503	GAG550000	Private	Potato Creek Tributary	0.0055	0.0055	30	45	1.38	0.25

Some storm water runoff is covered under the NPDES Permit Program. It is considered a diffuse source of pollution. Unlike other NPDES permits that establish end-of-pipe limits, storm water NPDES permits establish controls. Currently, regulated storm water discharges include those associated with industrial activities, including construction sites one acre or greater, and large and medium municipal separate storm sewer systems (MS4s).

Storm water discharges associated with industrial activities are currently covered under Georgia's General Storm Water NPDES Permit (GAR000000). This permit requires visual monitoring of storm water discharges, site inspections, implementation of Best Management Practices (BMPs), and record keeping. Table 11 provides a list of those facilities in the Flint River Basin that have submitted a Notice of Intent to be covered under Georgia's General Storm Water NPDES Permit Associated with Industrial Activities (228 in total). It is unknown at this time whether these facilities are contributing sediment to the watershed.

Table 11. Industrial Facilities with a General Storm Water NPDES Permit in the Flint River Basin

Facility Name	NOI No.	County
AAA Cooper Transportation	00651	Dougherty
Addison Steel, Inc.	03049	Dougherty
Airborne Express	02948	Fulton
Albany R/M Plant	00032	Dougherty
Alcoa Extrusions Inc.	02284	Fulton
American Airlines, Inc.	03118	Fulton
American Proteins-Cuthbert Division	00402	Randolph
Amoco Fabrics & Fibers Company	01647	Decatur
Apac Georgia, Inc.	03345	Fulton
Apac Georgia, Inc. - Dixie Asphalt Plant F	00054	Clayton
Apac Georgia, Inc. - Tyrone Asphalt Plant	02547	Fayette
Apac-Georgia - Newnan Asphalt Plant	01230	Coweta
Arnold Transportation Services	02330	Dougherty
Atlanta Worldport Delta Air Lines, Inc.	00593	Fulton
Atlantic Southeast Airlines	03262	Fulton
Atlas Roofing Corporation	01444	Henry
Avery Dennison	03218	Fayette
Bainbridge Block Plant	02211	Decatur
Bainbridge R/M Plant	00037	Decatur
Berrien County MSWLF	03395	Berrien
Blakely R/M Plant	00036	Early
Blue Circle Aggregates - Clayton County	02488	Clayton
Bob's Candies, Inc.	02058	Dougherty
Bosse Concrete Products	02600	Clayton
Bulldog Johnny/Haul-All - Tyrone Facility	02778	Fayette
Burlington Motor Carriers, Inc.	02279	Dougherty
Camilla R/M Plant	02209	Mitchell
Caravelle Marine	00440	Sumter
City Of Griffin - Spalding County Airport	00142	Spalding
Clayton County - Shoal Creek WPCP	01501	Clayton
Clayton County - W. B. Casey WPCP	01502	Clayton
Coats & Clark, Inc.	01650	Dougherty
Coca-Cola Enterprises	02243	Fulton
College Park Readymix	01477	Fulton
Collins & Aikman Products Company	00894	Sumter
Columbia Forest Products	02002	Randolph
Concrete Enterprises, Inc.	03062	Dougherty

Facility Name	NOI No.	County
Continental General Tire, Inc.	00589	Lamar
Cooper Lighting	01914	Sumter
Cordele Concrete Products Company	01324	Crisp
CPI Plastics, Inc.	02158	Coweta
Cr/PI, L.C.C. DBA Fiat Products	02233	Dougherty
Crisp County - U.S. 41s MSWLF Site #2	03264	Crisp
Crisp County - U.S. 41s Phase 2 MSWLF	01339	Crisp
Crown Technology li, LLC	03159	Meriwether
CSX Transportation , Inc.	02258	Meriwether
Curtice Burns Foods	00089	Macon
D & D Wood Preserving, Inc.	01739	Dougherty
Dan - Co Bakery, Inc.	01060	Clayton
Davidson Mineral Properties, Inc.	03070	Fayette
Dawson Manufacturing Company	00059	Terrell
Decatur County - SR 309 MSWLF	01397	Decatur
Dixie Numerics, Inc.	00096	Clayton
Donaldsonville R/M Plant	00034	Seminole
Dooly County MSWLF	03358	Dooly
Drexel Chemical Company	00407	Crisp
Eastern Foods, Inc.	03097	Fulton
Eastman Chemical Company	01441	Clayton
Emery Worldwide - ATG	02973	Clayton
Enco Materials Of Georgia, Inc.	02250	Dougherty
Estes Express Lines	03076	Dougherty
Excel Corporation D/B/A Excel Case Ready	03389	Coweta
Exopack, LLC	00201	Spalding
Fairburn Ready-Mix, Inc.	01544	Fayette
Fairburn Ready-Mix, Inc.	03196	Fayette
Fairburn Ready-Mix, Inc.	01545	Fulton
Fayette County - First Manassas Mile Road MSWLF	00327	Fayette
Fayette County - Grady Avenue Landfill	00329	Fayette
Fayette County Landfill/Transfer Station	00328	Fayette
Fayetteville Readymix	00683	Fayette
Federal Express Abya	02921	Dougherty
Federal Express Atlr	02969	Clayton
Federal Express Fop-Rt	03065	Clayton
Flint River Mills, Inc.	02221	Decatur
Flint River Textiles, Inc.	00873	Dougherty
Florida Rock & Tank Lines, Inc.	02517	Decatur
Florida Rock & Tank Lines, Inc.	02518	Dougherty
Florida Rock -Forest Park Quarry	03153	Clayton
Folsom Construction Company	01419	Crisp
Forest Park Asphalt Plant #827	01229	Fayette
Gaang Organizational Mtn Shop #12	02706	Dougherty
General Credit Forms, Inc.	02612	Dougherty
Georgia - Pacific Corporation	00485	Dougherty
Georgia - Pacific Resins, Inc.	01171	Dooly
Georgia Ports Authority - Bainbridge Terminal	00704	Decatur
Georgia Power Company - Plant Mitchell	02978	Dougherty
Gibson - Homans Company	01468	Rockdale
Gray Distribution Services, Inc.	02337	Dougherty
Griffin Lumber Company	00199	Crisp
Griffin Quarry	03155	Spalding
Grit Plant Treibacher Scleifmittel	00660	Sumter

Facility Name	NOI No.	County
Gs Roofing Products Company, Inc.	01493	Fayette
Harrell Company, Inc.	03167	Decatur
Harris Waste Management Group , Inc.	01405	Crisp
Hartsfield Atlanta International Airport	03343	Clayton
Heartland Express, Inc. Of Iowa	00400	Clayton
Helena Chemical Company	02030	Crisp
Homestead Homes (Div. Of Cavalier Ind., Inc.)	02560	Crisp
Hpi Georgia Inc.	03216	Early
Impreglon, Inc.	03270	Fulton
International Paper - Cordele Osb Mill	00100	Crisp
International Paper Company	03101	Clayton
J & M Tank Lines, Inc.	02005	Sumter
J. O. Barber Lumber Company, Inc.	00921	Meriwether
Jefferson Smurfit Corp. - Cuthbert Woodyard	00736	Randolph
Kason Industries	00338	Coweta
Kawneer Company, Inc.	00473	Clayton
King's Custom Builders, Inc.	03207	Schley
Kiwi International Holdings, Inc.	03197	Fulton
Kilm, Inc.	00474	Clayton
Leesburg R/M Plant	02480	Lee
LMC Manufacturing Company, Inc.	02762	Seminole
Macgregor Golf Company	01002	Dougherty
Marine Corps Logistics Base	01809	Dougherty
Marta - South Yard Rail Maintenance	01261	Fulton
Martha Mills	02017	Upson
Martin Marietta Aggregates - Albany Quarry	03028	Lee
Marvair Corporation	02473	Crisp
Masterfoods USA	01163	Dougherty
Matheson Tri-Gas, Inc.	00499	Clayton
Maxxis Corporation	03335	Coweta
Mead Southern Wood Products	01013	Meriwether
Merck & Company, Inc. - Flint River Plant	01595	Dougherty
Mercury Air Center	03260	Fulton
Miller Brewing Company	02932	Dougherty
Mullite Co. Of America - Hill Mining Area	00654	Sumter
Mullite Co. Of America - Easterlin Mining Area	00655	Sumter
Mullite Co. Of America - Holloway Mining Area	00663	Sumter
Mullite Co. Of America - Joiner Mine	00661	Sumter
Mullite Co. Of America - Justice Mining Area	00664	Sumter
Mullite Co. Of America - Mead Mining Area	00658	Sumter
Mullite Co. Of America - Plant No. 1	00657	Sumter
Mullite Co. Of America - Short Mining Area	00659	Sumter
Mullite Co. Of America - Webb Mining Area	00656	Sumter
Mullite Company Of America - Larkin Mine	03282	Sumter
Nacom Corporation	02992	Spalding
Norfolk Southern - Hapeville Auto Ramp	00797	Fulton
Oldcastle Precast	02027	Coweta
Owens Corning	02639	Fulton
Oxford Construction Company - Asphalt Plant #1	02848	Dougherty
Oxford Construction Company - Asphalt Plant No 4	02850	Decatur
Oxford Construction Company - Asphalt Plant No. 4	02849	Webster
Panasonic	03309	Fayette
Peachtree City - Falcon Field Airport	01174	Fayette
Photocircuits Corporation	00717	Fayette

Facility Name	NOI No.	County
Pike County - MSWLF	02046	Pike
Plant Crisp	02558	Crisp
Plant Ellis	02037	Coweta
Porex Scientific , Inc.	02549	Coweta
Porex Technologies	02354	Fulton
Procter & Gamble Paper Products Company	02808	Dougherty
Pure Pak Products Refinery	01674	Fayette
Ralston Purina Company	01049	Fulton
Reeves Construction Company	01973	Dougherty
Reeves Construction Company	00127	Sumter
Regional Recycling, LLC	01190	Decatur
Rock - Tenn Company	00884	Dekalb
Royster-Clark, Inc.	00258	Sumter
Schneider National	02796	Clayton
Scholle Corporation	00515	Fulton
Sealed Air Corporation	02579	Fayette
Shaw Industries Plant # 70	03252	Decatur
Shoal Creek Landfill C/D	00143	Spalding
Siemens Energy & Automation	00460	Dekalb
SKW-MBT Operations - Reynolds Plant	00069	Taylor
Southeastern Freight Lines, Inc.	02200	Dougherty
Southeastern Minerals, Inc.	01728	Decatur
Southern Concrete Construction Company, Inc.	03381	Decatur
Southern Mills, Inc. Plant Ray	02036	Upson
Southern Sand Mine	01615	Dougherty
Southern States Taylor County Landfill	02011	Taylor
Southern States, Inc.	02274	Henry
Southern Wood Supplies, Inc.	02188	Macon
Southwest Georgia Regional Airport	00998	Dougherty
Southwire Cyber Technologies, Inc.	03372	Fayette
Springs Industries - Carver Road Plant	02540	Spalding
Stowe Woodward Company	00574	Spalding
Swift Spinning Mills, Inc.	03212	Muscogee
Tacc International Corporation	03357	Bartow
Target Container	03385	Dougherty
Tarmac America, Inc. - Atlanta Terrascape	03271	Fayette
Taylor County Sr137 MSWLF	03089	Taylor
TCI, Inc.	02804	Schley
TDK Electronics	03148	Fayette
The Clorox Company	00405	Clayton
The Concrete Company	03136	Henry
The Concrete Company - Americus	01126	Sumter
The Concrete Company - Cordele	02457	Crisp
The Concrete Company - Griffin	01121	Spalding
The Concrete Company - Junction City	03352	Talbot
The Concrete Company - Manchester	02463	Meriwether
The Concrete Company - Montezuma	01125	Macon
The Concrete Company - Thomaston	02464	Upson
The Concrete Company - Tyrone	02462	Fayette
The Cooper Tire Company	00966	Dougherty
The Valvoline Company	00046	Fulton
Thomas Concrete Of Georgia, Inc. (Fayetteville)	02767	Fayette
Thomaston Mills - Pike Plant	02078	Pike
Thomaston Mills Complex	02801	Upson

Facility Name	NOI No.	County
Thomaston-Upson County Airport	02997	Upson
Tolleson Lumber Company	00463	Webster
Toto Industries (Morrow Plant), Inc.	03162	Clayton
TPC	02098	Clayton
Triple A Modular Buildings, Inc.	01928	Schley
Tyson Foods, Inc.	02582	Dooly
Tyson Foods, Inc.	02430	Macon
Tyson Foods, Inc.	00245	Marion
Tyson Foods, Inc.	00365	Marion
Tyson Foods, Inc.	00246	Terrell
U.S.P.S. Aux Vehicle Maintenance Facility	02403	Dougherty
U.S.P.S. Vehicle Maintenance Facility	02406	Fulton
Unimin Corporation - Junction City Plant	02884	Talbot
United Parcel Service, Inc.	00754	Clayton
United Parcel Service, Inc.	00763	Cobb
United Parcel Service, Inc.	02445	Dougherty
United Parcel Service, Inc. - Airport Hub	00762	Fulton
United Parcel Service, Inc. - Fayette	00755	Fayette
Vienna Particleboard Facility	01005	Dooly
Vulcan Construction Materials - Red Oak Quarry	01492	Fulton
Walker Concrete - Jonesboro	03313	Clayton
Walker Concrete Company, Inc.	02090	Fayette
Weyerhaeuser - Barnesville Wood Products	00906	Lamar
Weyerhaeuser Company	00533	Spalding
Woodgrain Millwork	00177	Sumter
Yamaha Motor Mfg. Corporation	00098	Coweta
Yamaha Music Manufacturing, Inc.	02156	Upson
Yokogawa Corporation Of America	00609	Coweta
Zorn Street MSWLF	01826	Upson

The MS4 permits have been issued under two phases. Phase I MS4 permits require the prohibition of non-storm water discharges (i.e., illicit discharges) into the storm sewer systems and controls to reduce the discharge of pollutants to the maximum extent practicable, including the use of management practices, control techniques and systems, as well as design and engineering methods (Federal Register, 1990). A site-specific Storm Water Management Plan (SWMP) outlining appropriate controls is required by and referenced in the permit. There are fifteen Phase I MS4s in the Flint River Basin (Table 12).

Table 12. Phase I Permitted MS4s in the Flint River Basin

Name	Permit No.	Watershed
Atlanta	GAS000100	Flint, Chattahoochee, Ocmulgee
Clayton County	GAS000107	Flint, Ocmulgee
College Park	GAS000109	Flint, Chattahoochee
East Point	GAS000114	Flint, Chattahoochee, Ocmulgee
Fairburn	GAS000115	Flint, Chattahoochee
Forest Park	GAS000116	Flint, Ocmulgee
Fulton County	GAS000117	Flint, Chattahoochee, Ocmulgee, Coosa
Hapeville	GAS000119	Flint, Ocmulgee

Name	Permit No.	Watershed
Jonesboro	GAS000120	Flint, Ocmulgee
Lake City	GAS000141	Flint, Ocmulgee
Lovejoy	GAS000142	Flint, Ocmulgee
Morrow	GAS000126	Flint, Ocmulgee
Palmetto	GAS000128	Flint, Chattahoochee
Riverdale	GAS000130	Flint
Union City	GAS000136	Flint, Chattahoochee

Source: Nonpoint Source Permitting Program, GA DNR, 2007

As of March 10, 2003, small MS4s serving urbanized areas are required to obtain a storm water permit under the Phase II storm water regulations. An urbanized area is defined as an entity with a residential population of at least 50,000 people and an overall population density of at least 1,000 people per square mile. Thirty counties and 56 communities are permitted under the Phase II regulations in Georgia. There are fifteen counties or communities located in the Flint River Basin that are covered by the Phase II General Storm Water Permit (Table 13).

Table 13. Phase II Permitted MS4s in the Flint River Basin

Name	Permit No.	Watershed
Albany	GAG610000	Flint
Cordele	GAG610000	Flint
Coweta County	GAG610000	Flint, Chattahoochee
Dougherty County	GAG610000	Flint
Fayette County	GAG610000	Flint
Fayetteville	GAG610000	Flint
Griffin	GAG610000	Flint, Ocmulgee
Hampton	GAG610000	Flint, Ocmulgee
Henry County	GAG610000	Flint, Ocmulgee
Lee County	GAG610000	Flint
Leesburg	GAG610000	Flint
Newnan	GAG610000	Flint, Chattahoochee
Peachtree City	GAG610000	Flint
Tyrone	GAG610000	Flint
Spalding County	GAG610000	Flint, Ocmulgee

Source: Nonpoint Source Permitting Program, GA DNR, 2007

Those watersheds that occur within Phase I or Phase II MS4 areas as are listed in Table 14. The table provides the total area of each of these watersheds, and the percentage of the watershed that is an MS4 area.

Table 14. Percentage of Watersheds Occurring in MS4 Areas

Name	Total Area (acres)	% in MS4 area
Wasp Creek	793.0	18.3

Soil erosion from construction sites is also a major source of sediment in Georgia's streams. Georgia requires construction sites over one acre to have a General Storm Water NPDES permit. Since construction sites are regulated by NPDES permits, they will be considered as point sources. It is unknown if there are any construction sites in impaired watersheds of the Flint River Basin.

3.2 Nonpoint Source Assessment

Eroded soils from forests, cropland, mining sites, and other land can be transported to Georgia streams through runoff. Excessive sediment that reaches the water bodies can cause several changes to the stream. It can make the streams shallower and wider, affecting the stream's temperature, dissolved oxygen, flow rate and velocity. It can affect the ability of the stream to assimilate pollutants. It can change the diversity of fish populations and other biological communities. It can also cause increased flooding. In addition, harmful pollutants attached to the sediment can be transported to rivers and streams.

3.2.1 Silviculture

Georgia has 23.6 million acres of commercial forests. This represents approximately 64 percent of all of Georgia's land use. Approximately 68 percent of the commercial forests are privately owned, 25 percent are owned by industry, and 7 percent are publicly held (GA EPD, 1999).

The majority of soil erosion from forested land occurs during timber harvesting and the period immediately following, and during reforestation. Once the forest is re-established, very little soil erosion occurs. Timber harvesting includes the layout of access roads, log decks, and skid trails; the construction and stabilization of these areas; and the cutting of trees. Both hardwoods and pines are harvested throughout Georgia. A minimum harvest is usually ten acres and the percent of forest that is harvested each year varies from county to county. Table 15 lists the percent timberland and percent harvested per year by county.

Table 15. Percent Timberland and Percent Harvested per Year by County

County	Total Area (1000 acres)	Timberland (1000 acres)	Percent Timberland	Growing Stock Volume (million ft ³) ^a	Annual Volume Removal (million ft ³)	Annual percent Removal
Baker	219.7	114.9	52.30%	134.0	2.8	2.09%
Calhoun	179.3	94.3	52.59%	120.7	4.1	3.40%
Chattahoochee	159.2	142.0	89.20%	168.6	5.0	2.97%
Clay	124.9	82.0	65.65%	105.2	3.1	2.95%
Clayton	208.1	163.2	78.42%	119.3	9.5	7.96%
Colquitt	353.5	168.8	47.75%	187.8	12.0	6.39%
Coweta	283.6	195.4	68.90%	330.3	5.3	1.60%
Crawford	208.1	163.2	78.42%	119.3	9.5	7.96%

County	Total Area (1000 acres)	Timberland (1000 acres)	Percent Timberland	Growing Stock Volume (million ft ³) ^a	Annual Volume Removal (million ft ³)	Annual percent Removal
Crisp	175.3	68.5	39.08%	72.1	4.7	6.52%
Decatur	382.0	201.1	52.64%	117.8	1.2	1.02%
Dooly	251.5	110.5	43.94%	151.8	5.2	3.43%
Dougherty	211.0	110.3	52.27%	190.6	5.9	3.10%
Early	327.2	151.5	46.30%	156.8	8.9	5.68%
Fayette	126.3	59.6	47.19%	99.3	3.9	3.93%
Fulton	338.4	123.8	36.58%	372.3	14.9	4.00%
Grady	293.2	166.7	56.86%	206.1	7.3	3.54%
Henry	206.5	109.8	53.17%	198.8	8.0	4.02%
Houston	241.1	122.9	50.97%	167.0	2.6	1.56%
Lamar	119.6	91.7	76.67%	119.0	5.0	4.20%
Lee	227.7	99.2	43.57%	114.5	3.9	3.41%
Macon	258.1	154.8	59.98%	200.5	5.7	2.84%
Marion	234.9	188.2	80.12%	126.3	5.3	4.20%
Meriwether	322.1	230.7	71.62%	234.2	21.1	9.01%
Miller	181.2	62.9	34.71%	79.1	1.2	1.52%
Mitchell	327.7	121.5	37.08%	123.5	6.6	5.34%
Monroe	253.2	194.3	76.74%	261.8	9.0	3.44%
Peach	96.7	40.9	42.30%	28.2	-	-
Pike	139.8	81.0	57.94%	113.6	3.1	2.73%
Randolph	274.7	180.7	65.78%	166.6	8.7	5.22%
Schley	107.3	78.3	72.97%	80.5	5.6	6.96%
Seminole	152.4	45.4	29.79%	52.4	1.3	2.48%
Spalding	126.7	66.9	52.80%	95.9	11.4	11.89%
Stewart	293.6	253.7	86.41%	203.1	20.7	10.19%
Sumter	310.6	161.9	52.12%	174.1	10.4	5.97%
Talbot	251.7	219.5	87.21%	195.0	15.4	7.90%
Taylor	241.6	190.4	78.81%	121.6	7.2	5.92%
Terrell	214.7	103.1	48.02%	98.7	5.1	5.17%
Turner	208.3	153.8	73.84%	227.3	6.7	2.95%
Upson	208.3	15.4	7.38%	227.3	6.7	2.95%
Webster	134.1	91.3	68.08%	67.5	6.1	9.04%
Worth	364.7	194.0	53.19%	276.6	15.8	5.71%

^a Estimate - does not include trees less than 5" DBH.

Source: Thomas, Michael T., 1997. Forest Statistics for Georgia

3.2.2 Agriculture

Agriculture can be a significant contributor of nonpoint pollutants to rivers and streams. Sediment and nutrients are the major pollutants of concern and cropland is one of the major sources of soil loss due to sheet and rill erosion. Over the last century there has been a dramatic decrease in the amount of land farmed in Georgia. In 1950, there were 208,000 farms encompassing 26 million acres in Georgia (U.S. Department of Agriculture, National Agricultural Statistics Service website). In 2000, there were approximately 11.1 million acres of farmland in Georgia, with the number of farms estimated to be 50,000 and the average farm size being approximately 222 acres. This represents a 57 percent reduction in farmland.

With the reduction in farmland, there has also been a decrease in the amount of soil erosion. The National Resources Inventory found the total wind and water erosion on cropland and Conservation Reserve Program land in Georgia declined 38 percent, from 3.1 billion tons per year in 1982 to 1.9 billion tons per year in 1997 (USDA-NRCS, 1997). This suggests that the source of sediment in many of the impaired streams in the Flint River Basin may be the result of past land use practices. Thus, it is believed that if sediment loads are maintained at acceptable levels, streams will repair themselves over time.

3.2.3 Grazing Areas

Farm animals grazing on pastureland can leave areas of ground with little or no vegetative cover. During a rainfall runoff event, soil in the pastures is eroded and transported to nearby streams, typically by gully erosion. The amount of soil loss from gully erosion is generally less than that caused by sheet and rill erosion. Work in small grazed catchments in New Mexico found that gully erosion contributed only 1.4 percent of the total sediment load as compared to sheet and rill erosion. Other research found that gully erosion typically contributes less than 30 percent of the total sediment load; however, contributions have ranged from 0 to 89 percent (USEPA, 2001b).

Beef cattle spend all their time grazing in pastures, while dairy cattle and hogs are confined periodically. Hog farms confine the animals or allow them to graze in small pastures or pens. On dairy farms, the cows are confined for a limited period each day, during which time they are fed and milked.

In addition, cattle and other unconfined animals often have direct access to streams that pass through pastures. As these animals walk down to the stream, they often damage stream banks. Stream bank vegetation is destroyed and the banks often collapse, resulting in increased sedimentation to the waterway.

3.2.4 Mining Sites

Minerals, rocks, and ores are found in natural deposits on or in the earth. Kaolin, clays, granite, marble, sand, gravel, and other mineral products are the materials primarily mined in Georgia. Surface mining involves the activities and processes used to remove minerals, ores, or other solid material. Tunnels, shafts and dimension stone quarries are not considered to be surface mines. Surface mining encompasses a variety of activities from sand dredging to open pit clay mining to hard rock aggregate quarrying.

Removal of vegetation, displacement of soils and other significant land disturbing activities are typically associated with surface mining. These operations can result in accelerated erosion and sedimentation of surface waters.

3.2.5 Roads

Erosion from unpaved roadways can be a significant source of sediment to rivers and streams. Road erosion occurs when soil particles are loosened and carried away from the roadway, ditch or road bank by water, wind or traffic. The actual road construction (including erosive road-fill soil types, shape and size of coarse surface aggregate, poor subsurface and / or surface drainage, poor road bed construction, roadway shape, and inadequate runoff discharge outlets or “turn-outs” from the roadway) may aggravate roadway erosion. In addition, external factors such as roadway shading and light exposure, traffic patterns, and road maintenance may also affect roadway erosion.

Exposed soils, high runoff velocities and volumes, and poor road compaction all increase the potential for erosion. Loose soil particles are often carried from the roadbed into roadway drainage ditches. Some of these particles settle out satisfactorily, but usually they settle out poorly, causing diminished ditch carrying capacity that results in roadway flooding and, subsequently, more roadway erosion (Choctawhatchee, et. al, 2000).

3.2.6 Urban Development

Soil erosion from land disturbing activities is a major source of sediment in Georgia’s streams. Land-disturbing activities are defined as any activity that may result in soil erosion and the movement of sediments into state waters or on lands of the state. Examples of land disturbing activities include clearing, grading, excavating, or filling of land. The following activities are unconditionally exempt from the provisions of the Erosion and Sedimentation Act: surface mining, granite quarrying, minor land-disturbing activities such as home gardens and landscaping, agricultural and silvicultural operations, and any project carried out under the technical supervision of the NRCS.

Conversion of forest to urban land use is often associated with water quality degradation. From 1982 through 1989, the area classified as commercial forest within the Flint River Basin decreased by approximately 1053 acres or 0.0045 percent (GAEPD, 1998). It should be noted that forest undergoing conversion to another land use is not considered silviculture, but rather a land disturbing activity.

Storm water runoff from developed urban areas can also have an impact on the transport of sediment to and within streams. Urbanization increases imperviousness, resulting in an increase in the volume of runoff entering the streams. In addition, the stream flow rates may increase significantly from pre-construction rates causing stream bank erosion and stream bottom down cutting.

4.0 MODELING APPROACH

Establishing the relationship between the in-stream water quality and the source loadings is an important component of TMDL development. It provides for both the identification of sources, and their relative contribution, as well as the examination of potential water quality changes resulting from varying management options to meet the water quality standard. This relationship can be developed using a variety of techniques ranging from simple methods based on scientific principles to more complex numerical computer modeling techniques.

In this section, the numerical modeling techniques developed to simulate sediment fate and transport in the watershed are discussed. The limited amount of sediment loading data and in-stream sediment information prevents EPD from using a dynamic watershed runoff model, which requires a great deal of data for model development and calibration. Instead, EPD determined the annual sediment loads delivered to the stream from the surrounding watershed. This TMDL does not address in-stream sedimentation processes, such as bank erosion and stream bottom down cutting, since computer models that simulate these processes are not available at this time.

4.1 Model Selection

The Agricultural Research Station (ARS) developed the Universal Soil Loss Equation (USLE) over 30 years ago. It is the most widely accepted and most used soil loss equation. It was designed as a method to predict average annual soil loss caused by sheet and rill erosion. The USLE can estimate long-term soil loss, and can assist in choosing proper cropping, management and conservation practices. However, it cannot be used to determine erosion for a specific year or specific storm. Because of the wide acceptance by the forestry, agricultural, and academic communities, the USLE was selected as the tool for estimating long-term annual soil erosion, assessing the impacts of various land uses, and evaluating the benefits of various BMPs.

4.2 Universal Soil Loss Equation

For each of the watersheds monitored in the Flint River Basin, the existing annual sediment load was estimated using the USLE. The USLE predicts the average annual soil loss caused by sheet and rill erosion. Soil loss from sheet and rill erosion is mainly due to detachment of soil particles during rainfall events. It is the major source of soil loss from crop production and animal grazing areas, logging areas, mine sites, unpaved roads, and construction sites. The equation used for estimating average annual soil erosion is:

$$A = RKLSCP$$

Where:

A = average annual soil loss, in tons / acre

R = rainfall erosivity index

K = soil erodibility factor

LS = topographic factor

L = slope length

S = slope

C = cropping factor

P = conservation practice factor

4.2.1 Rainfall Erosivity Index

The R factor, or rainfall erosivity index, describes the kinetic energy generated by the frequency and intensity of the rainfall. It is statistically calculated from the annual summation of rainfall energy in every storm, which correlates to the raindrop size, times its maximum 30-minute intensity. It varies geographically and ranges from 300 to 425 within the Flint River Basin. The R Factors by county are provided in Table 16.

4.2.2 Soil Erodibility Factor

The K factor, or soil erodibility factor, represents the susceptibility of soil to be eroded. This factor quantifies the cohesive or bonding character of the soil and ability of the soil to resist detachment and transport during a rainfall event. It is a function of the soil type, which is provided by the STATSGO data. Table 6 provides a breakdown of the soil type within each modeled watershed and the corresponding K factor. STATSGO soil data has a resolution of 1:250,000 and is available for all of Georgia. A higher-resolution (1:25,000) soil data, SSURGO, is available for fourteen Georgia counties. For consistency, it was decided that STATSGO data would be used for the first round or phase of sediment TMDLs because of its availability for all of Georgia. During the second phase of sediment TMDLs, if SSURGO data is available for all of Georgia, it may be used.

4.2.3 Topographic Factor

The LS factor, or topographic factor, represents the effect of slope length and slope steepness on erosion. Steeper slopes produce higher overland flow velocities. Longer slopes accumulate more runoff from larger areas and also result in higher overflow velocities. The slope length and slope is based on the grid size and ground slope provided by the USGS 30 by 30 meter Digital Elevation Model (DEM) grids downloaded from the State GIS clearinghouse.

4.2.4 Cropping factor

The C factor, or cropping factor, represents the effect plants, soil cover, soil biomass, and soil disturbing activities have on erosion. It is the most complicated of the USLE factors. It incorporates effects of tillage, crop type, cropping history, and crop yield. Cropping factors for forested, agricultural, and urban lands were provided by the Georgia Forestry Commission (GFC), Natural Resources Conservation Service (NRCS), and U.S. Environmental Protection Agency (EPA), respectively.

The cropland and pastureland C factors for each county were developed by NRCS under the National Resource Inventory Program. Table 17 lists the C factors by county for forest, cropland, and pasture. These values were developed based on the 2001 NLCD and GFC data. Low-level aerial photography was performed and the photographs are interpreted to identify land features. If data were not available for a given county, the C factor was calculated by averaging the C factors from all the surrounding counties. The cropland and pastureland C factors for watersheds in multiple counties were determined by area-weighting the agricultural land use within each county.

C factors for the road networks were determined based on the road surface and are given in Table 18. Road information, including road surface, was provided by the Georgia Department of Transportation (DOT). Data gaps were filled based on adjacent road surfaces and road types (i.e., state, county, private).

Table 16. R Factors by County

County	R factor
Baker	362.5
Calhoun	362.5
Chattahoochee	350
Clay	362.5
Clayton	300
Colquitt	350
Coweta	325
Crawford	300
Crisp	337.5
Decatur	412.5
Dooly	325
Dougherty	350
Early	400
Fayette	300
Fulton	300
Grady	400
Henry	300
Houston	300
Lamar	300
Lee	350
Macon	325
Marion	337.5
Meriwether	325
Miller	400
Mitchell	362.5
Monroe	300
Peach	300
Pike	312.5
Randolph	350
Schley	325
Seminole	425
Spalding	300
Stewart	350
Sumter	325
Talbot	325
Taylor	325
Terrell	350
Turner	337.5
Upson	325
Webster	350
Worth	350

Table 17. Forest, Cropland and Pastureland C Factors by County

County	C factor		
	Forested	Cropland	Pastureland
Baker	0.000136	0.328	0.003
Calhoun	0.000158	0.363	0.003
Chattahoochee	0.000150	0.418	0.003
Clay	0.000150	0.307	0.004
Clayton	0.000266	0.346	0.003
Colquitt	0.000209	0.427	0.018
Coweta	0.000127	0.433	0.005
Crawford	0.000235	0.479	0.011
Crisp	0.000211	0.409	0.004
Decatur	0.000176	0.355	0.029
Dooly	0.000158	0.496	0.003
Dougherty	0.000153	0.345	0.006
Early	0.000196	0.408	0.004
Fayette	0.000167	0.194	0.003
Fulton	0.000168	0.476	0.007
Grady	0.000160	0.384	0.003
Henry	0.000168	0.305	0.004
Houston	0.000126	0.436	0.028
Lamar	0.000169	0.306	0.026
Lee	0.000158	0.419	0.006
Macon	0.000148	0.490	0.008
Marion	0.000171	0.336	0.003
Meriwether	0.000253	0.360	0.004
Miller	0.000126	0.404	0.008
Mitchell	0.000126	0.404	0.008
Monroe	0.000191	0.394	0.003
Peach	0.000100	0.324	0.028
Pike	0.000146	0.193	0.014
Randolph	0.000189	0.391	0.003
Schley	0.000218	0.353	0.003
Seminole	0.000142	0.393	0.003
Spalding	0.000302	0.410	0.005
Stewart	0.000273	0.408	0.003
Sumter	0.000202	0.382	0.003
Talbot	0.000234	0.384	0.003
Taylor	0.000201	0.513	0.003
Terrell	0.000188	0.343	0.003
Turner	0.000229	0.445	0.003
Upson	0.000150	0.364	0.016
Webster	0.000254	0.353	0.003
Worth	0.000197	0.429	0.018

Source: USDA-NCRS, 1997. National Resources Inventory; USDA-NCRS Athens, Georgia

Table 18. Road C Factors

Road Surface	Type	C factor
Rigid and High Flexible Road	1	0.13
Bituminous Surfaced Road	2	0.25
Gravel or Stone Road	3	0.65
Soil-Surfaced Road	4	0.75
Primitive or Unimproved Road	5	0.75

C factors for other land uses, including urban, mining, transitional, grass and wetlands, are listed in Table 19. These values were provided by the U.S. Environmental Protection Agency (EPA) and are used in all watersheds.

Table 19. Various Land Use C Factors

Land Use	C factor
Water	0
Low Intensity Residential	0.02
High Intensity Residential	0.005
High Intensity Commercial, Industrial, Transportation	0.003
Bare rock, sand, clay	0
Quarries, strip mines, gravel pits	0.75
Deciduous Shrubland	0.005
Other Grasses	0.003
Woody Wetlands	0.011
Emergent Herbaceous Wetlands	0.003

4.2.5 Conservation Practice Factor

The P factor or conservation practice factor represents the effects of conservation practices on erosion. The conservation practices include BMPs such as contour farming, strip cropping and terraces. In all cases, it was assumed that no BMPs were used and the P factor for all land uses was 1.0.

4.3 WCS Sediment Tool

EPA and Tetra Tech developed the Arcview-based Watershed Characterization System (WCS) to provide tools for characterizing various watersheds. WCS was used to display and analyze geographic information system (GIS) data, including land use, soil type, ground slope, road networks, point source discharges, and watershed characteristics.

An extension of WCS is the Sediment Tool, which incorporates the USLE. The Sediment Tool can be used to perform the following tasks:

- Estimate the extent and distribution of potential soil erosion within a watershed;
- Estimate the potential sediment delivery to the receiving water body; and
- Evaluate the effects of land use, BMPs, and road networks on erosion and sediment delivery.

The watersheds of interest were delineated based on the RF3 stream coverage and elevation data. A stream grid for each delineated watershed was created based on elevation data. The stream grid corresponded to a stream network with twenty-five 30 by 30 meter headwater cells (5.5 acres). The stream grid network has flow and can accumulate flow.

For each 30 by 30 meter grid cell within the watershed, the WCS Sediment Tool calculates the potential erosion using the USLE based on the specific cell characteristics. The model then calculates the potential sediment delivery to the stream grid network. Sediment delivery can be calculated using one of the four available sediment delivery equations:

- Distance-based equation
 $Md = M * (1 - 0.97 * D / L)$

Where: Md = mass moved (tons/acre/yr)
 M = sediment mass eroded (ton)
 D = least cost distance from a cell to the nearest stream grid (ft)
 L = maximum distance the sediment may travel (ft)

- Distance slope-based equation
 $DR = \exp(-0.4233 * L * Sf)$

Where: $Sf = \exp(-16.1 * r / L + 0.057) - 0.6$
 DR = sediment delivery ratio
 L = distance to the stream (m)
 r = relief to the stream (m)

- Area-based equation
 $DR = 0.417762 * A^{(-0.134958)} - 1.27097, DR \leq 1.0$

Where: DR = sediment delivery ratio
 A = area (sq miles)

- WEPP-based regression equation
 $Z = 0.9004 - 0.1341 * X^2 + X^3 - 0.0399 * Y + 0.0144 * Y^2 + 0.00308 * Y^3$

Where: Z = percent of source sediment passing to the next grid cell
 X = cumulative distance downslope
 Y = percent slope in the grid cell

Based on work previously performed by EPA on the Chattooga River Watershed, it was determined that the distance slope-based equation provided the best prediction of the sediment delivery (USEPA, 2001b).

The WCS Sediment Tool estimates the total soil erosion and sediment delivered to the stream from each grid cell due to land use cover and from the grids representing roads.

5.0 TOTAL MAXIMUM DAILY LOAD

A Total Maximum Daily Load (TMDL) is the amount of a pollutant that can be assimilated by the receiving waterbody without exceeding the applicable water quality standard; in this case, the narrative water quality standard for aquatic life. TMDLs establish allowable pollutant loadings that are less than or equal to the TMDL, and thereby provide the basis to establish water quality based controls. For some pollutants, TMDLs are expressed on a mass loading basis.

This TMDL determines the range of sediment load that can enter the impaired Flint River Basin watersheds without causing additional impairment to the stream. This is based on the hypothesis that if an impaired watershed has an annual average sediment loading rate similar to a biologically unimpaired watershed, then the receiving stream will remain stable and not be biologically impaired due to sediment. The average sediment load in the watersheds not on the 303(d) list is 0.08 tons/acre/yr.

A TMDL is the sum of the individual waste load allocations (WLA) for point sources and load allocations (LA) for nonpoint sources and natural background (40 CFR 130.2). The sum of these components may not result in an exceedance of water quality standards for a water body. To protect against exceedances, the TMDL must also include a margin of safety (MOS), either implicitly or explicitly, that accounts for the uncertainty in the relationship between pollutant loads and the water quality response of the receiving water body. Conceptually, a TMDL can be expressed as follows:

$$\text{TMDL} = \Sigma\text{WLA}s + \Sigma\text{LA}s + \text{MOS}$$

The following sections describe the various TMDL components.

5.1 Waste Load Allocations

The waste load allocation is the portion of the receiving water's loading capacity that is allocated to existing or future point sources. There are fifteen permitted facilities in the Flint River Basin watersheds that discharge into listed segments or upstream of a listed segment. These include facilities with industrial process waters, municipal treatment plants, and surface mines. WLAs are provided to the point sources from municipal and industrial wastewater treatment systems with NPDES effluent limits.

There is one active NPDES permitted facilities with TSS permit limits in the Flint River Basin watershed that discharges into a listed segment or upstream of a listed segment. The maximum allocated sediment load for this private and institutional development (PID) wastewater treatment facility is dependent on the discharge flow. Table 20 provides the WLAs for this facility. The WLA load is given as a concentration TSS limit for the facility; however, a load can be calculated based on the permitted (where available) or design flows, and the permitted TSS concentrations.

The WLA, as a load, can be represented by the following equation:

$$\text{WLA} = \text{C}_{\text{permitted}} * \text{Q}$$

Where: WLA = Wasteload Allocation sediment load

C_{permitted} = permitted concentration, in TSS (mg / L)

Q = permitted (where available) or design discharge flow

Table 20. Waste Load Allocations for Permits with TSS Limits

FACILITY	NPDES PERMIT NO.	RECEIVING WATER	TSS	
			Monthly Avg (mg/L)	Weekly Avg (mg/L)
Moose Lodge #1503	GA0034592	Potato Creek Tributary	30	45

If there is available assimilative capacity, a new facility may be allowed, or it may be acceptable for an existing facility to expand. Any discharge increases will be allowed dependent on engineering and biological integrity study results.

State and Federal Rules define storm water discharges covered by NPDES permits as point sources. However, storm water discharges are from diffuse sources and there are multiple storm water outfalls. Storm water sources (point and nonpoint) are different than traditional NPDES permitted sources in four respects: 1) they do not produce a continuous (pollutant loading) discharge; 2) their pollutant loading depends on the intensity, duration, and frequency of rainfall events, over which the permittee has no control; 3) the activities contributing to the pollutant loading may include the various allowable activities of others, and control of these activities is not solely within the discretion of the permittee; and 4) they do not have wastewater treatment plants that control specific pollutants to meet numerical limits.

The intent of storm water NPDES permits is not to treat the water after collection, but to reduce the exposure of storm water to pollutants by implementing various controls. It would be infeasible and prohibitively expensive to control pollutant discharges from each storm water outfall. Therefore, storm water NPDES permits require the establishment of controls or BMPs to reduce the pollutants entering the environment.

The stormwater discharges associated with industrial facilities that are not covered under individual NPDES permits are regulated by a Georgia General Storm Water NPDES Permit (GAR000000). Table 12 lists the industrial facilities that are covered under the Georgia General Stormwater NPDES Permit in the Flint River Basin. Facilities covered by this permit that discharge storm water associated with industrial activity or within one linear mile upstream and within the same watershed of an impaired stream segment are required to monitor for the pollutant of concern.

The sediment load allocation from future construction sites within the watershed will have to meet the requirements outlined in the Georgia General Storm Water NPDES Permit for Construction Activities. This permit authorizes the discharge of storm water associated with construction activity to the waters of the State in accordance with the limitations, monitoring requirements, and other conditions set forth in Parts I through VII of the Georgia Storm Water Permit. The conditions of the permit were established to assure that the storm water runoff from these sites does not cause or contribute sediment to the stream. Georgia's General Storm Water Permit can be considered a water quality-based permit in that the numeric limits in the permit, if met, will not cause a water quality problem.

The WLA loads were calculated based on the average monthly permitted flow and TSS concentrations for the municipal facilities.

The sediment load allocation from future construction sites within the watershed will have to meet the requirements outlined in the Georgia General Storm Water NPDES Permit for Construction Activities. This permit authorizes the discharge of storm water associated with construction activity to the waters of the State in accordance with the limitations, monitoring requirements, and other conditions set forth in Parts I through VII of the Georgia Storm Water Permit. The conditions of the permit were established to assure that the storm water runoff from these sites does not cause or contribute sediment to the stream. Georgia's General Storm Water Permit can be considered a water quality-based permit in that the numeric limits in the permit, if met, will not cause a water quality problem.

5.2 Load Allocations

The USLE was used to determine the relative sediment contributions from each significant land use. The USLE was applied to those watersheds that are biologically impaired and those that are not, to determine the current sediment loading rates to the streams. The sediment load allocation for each stream by land use, including roads, is reported in Table 21. The watersheds are grouped by: those that are not on the 303(d) list and those that are on the 303(d) list. For comparison purposes, the total sediment load in tons per acre per year is also given. The average sediment load in the watersheds that are biota impacted is 0.05 tons/acre/yr. The average sediment load in the watersheds not on the 303(d) list is 0.08 tons/acre/yr. Table 22 gives each source's percent contribution to the total sediment load.

The Total Allowable Load for each impaired segment is calculated by multiplying the watershed area in acres by an annual load per acre. This annual load is based on the average annual load per acre from all the unimpaired streams with an IBI score greater than 45 (Piedmont, 0.05 tons/acre/yr). The LA is then calculated by subtracting the WLA from the Total Allowable Load.

Understanding the potential sediment sources and the changes in land use that have occurred over the last century provides insight into the streams' current water quality issues. The average annual sediment load per unit area for the unimpaired and impaired watersheds are generally within the same range. Over the last century there has been a dramatic decrease in the amount of land farmed in Georgia. Since 1950, there has been a 57 percent reduction in farmland. With the reduction in farmland, there has also been a decrease in the amount of soil erosion. This suggests that the sedimentation observed in the impaired stream segments may be legacy sediment resulting from past land use practices. It is believed that if sediment loads are maintained at acceptable levels, streams will repair themselves over time.

5.3 Seasonal Variation

Sediment is expected to fluctuate according to the amount and distribution of rainfall. Since rainfall is greatest in the spring and winter seasons, it is expected that sediment loadings would be highest during these seasons. However, these seasonal fluctuations and other short-term variability in loadings due to episodic events is usually evened out by the response of the annual sediment load was determined.

Table 21. Sediment Load Allocations (Unimpaired – Piedmont Ecoregion)

Sediment Load (tons/yr)																	
Name	Open Water	Low Intensity Residential	High Intensity Residential	High Intensity Commercial Industrial Transportation	Bare Rock Sand and Clay	Quarries Strip Mines Gravel Pits	Deciduous Forest	Evergreen Forest	Mixed Forest	Deciduous Shrubland	Pasture/Hay	Row Crops	Other Grasses (Urban Recreational)	Woody Wetland	Road	Total	Load (ton/acre/yr)
Auchumpkee Creek	0.00	2.80	0.10		0.00	0.54	38.12	40.03	1.85	50.10	859.21	2.65	9.58	369.97	228.30	1,605.25	0.06
Baroucho Creek	0.00	0.39	0.05		0.00		2.11	0.82	0.06	11.34	95.14		0.76	0.83	4.52	116.46	0.14
Brittens Creek	0.00	1.04			0.00		3.94	1.83	0.07	4.85	51.83		0.89	18.43	40.52	123.59	0.05
Five Mile Creek	0.00	3.49	0.00		0.00		0.91	0.48	0.00	0.43	48.98	0.66	2.50	2.94	35.67	96.08	0.10
Kendall Creek	0.00	0.01					5.66	6.09	0.09	4.05	21.13		0.77	24.87	32.95	95.79	0.04
Lazer Creek	0.00	40.65	0.51	0.01	0.00		60.56	33.23	0.40	70.53	285.19	21.56	37.87	200.79	533.62	1,287.73	0.06
Big Lazer Creek	0.00	112.38	2.27	0.14	0.00	0.00	235.45	133.91	2.99	262.35	1,150.26	35.39	124.58	1,205.22	2,094.59	5,370.02	0.05
Mock Woodall Branch	0.00	0.39	0.00		0.00		1.16	0.22	0.02	0.50	46.47	0.15	0.84	1.59	10.88	62.22	0.05
Potato Creek u/s	0.00	421.61	21.63	6.76	0.00	600.11	38.16	28.54	2.55	26.98	1,518.31	32.64	115.66	365.96	1,166.30	4,345.95	0.11
Potato Creek d/s	0.00	445.70	22.43	6.78	0.00	600.11	56.62	36.44	3.60	43.75	2,801.89	72.65	135.24	607.25	1,401.76	6,235.62	0.11

Table 21. Sediment Load Allocations (Impaired – Piedmont Ecoregion)

Sediment Load (tons/yr)																	
Name	Open Water	Low Intensity Residential	High Intensity Residential	High Intensity Commercial Industrial Transportation	Bare Rock Sand and Clay	Quarries Strip Mines Gravel Pits	Deciduous Forest	Evergreen Forest	Mixed Forest	Deciduous Shrubland	Pasture/Hay	Row Crops	Other Grasses (Urban Recreational)	Woody Wetland	Road	Total	Load (ton/acre/yr)
Wasp Creek	0.00	11.75	1.28	0.20	0.00	0.00	0.84	0.56	0.03	0.56	10.50	0.00	1.89	3.62	12.13	43.38	0.05

Table 22. Sediment Load Percentages (Unimpaired – Piedmont Ecoregion)

Percent Total Sediment Load																
Name	Open Water	Low Intensity Residential	High Intensity Residential	High Intensity Commercial / Industrial Transportation	Bare Rock Sand and Clay	Quarries Strip Mines Gravel Pits	Deciduous Forest	Evergreen Forest	Mixed Forest	Deciduous Shrub	Pasture / Hay	Row Crops	Other Grasses (Urban Recreational)	Woody Wetland	Road	
Auchumpkee Creek	0.00%	0.17%	0.01%	0.00%	0.00%	0.03%	2.37%	2.49%	0.12%	3.12%	53.53%	0.17%	0.60%	23.05%	14.22%	
Baroucho Creek	0.00%	0.33%	0.04%	0.00%	0.00%	0.00%	1.81%	0.70%	0.05%	9.73%	81.69%	0.00%	0.65%	0.72%	3.88%	
Brittens Creek	0.00%	0.84%	0.00%	0.00%	0.00%	0.00%	3.19%	1.48%	0.06%	3.92%	41.93%	0.00%	0.72%	14.92%	32.79%	
Five Mile Creek	0.00%	3.63%	0.00%	0.00%	0.00%	0.00%	0.95%	0.50%	0.00%	0.44%	50.98%	0.69%	2.60%	3.06%	37.13%	
Kendall Creek	0.00%	0.01%	0.00%	0.00%	0.00%	0.00%	5.91%	6.36%	0.10%	4.23%	22.06%	0.00%	0.80%	25.96%	34.40%	
Lazer Creek	0.00%	3.16%	0.04%	0.00%	0.00%	0.00%	4.70%	2.58%	0.03%	5.48%	22.15%	1.67%	2.94%	15.59%	41.44%	
Big Lazer Creek	0.00%	2.09%	0.04%	0.00%	0.00%	0.00%	4.38%	2.49%	0.06%	4.89%	21.42%	0.66%	2.32%	22.44%	39.01%	
Mock Woodall Branch	0.00%	0.62%	0.00%	0.00%	0.00%	0.00%	1.86%	0.35%	0.03%	0.80%	74.68%	0.24%	1.35%	2.55%	17.49%	
Potato Creek u/s	0.00%	9.70%	0.50%	0.16%	0.00%	13.81%	0.88%	0.66%	0.06%	0.62%	34.94%	0.75%	2.66%	8.42%	26.84%	
Potato Creek d/s	0.00%	7.15%	0.36%	0.11%	0.00%	9.62%	0.91%	0.58%	0.06%	0.70%	44.93%	1.17%	2.17%	9.74%	22.48%	

Table 22. Sediment Load Percentages (Impaired – Piedmont Ecoregion)

Percent Total Sediment Load																
Name	Open Water	Low Intensity Residential	High Intensity Residential	High Intensity Commercial / Industrial Transportation	Bare Rock Sand and Clay	Quarries Strip Mines Gravel Pits	Transitional	Deciduous Forest	Evergreen Forest	Mixed Forest	Pasture / Hay	Row Crops	Other Grasses (Urban Recreational)	Woody Wetland	Road	
Wasp Creek	0.00%	27.09%	2.95%	0.46%	0.00%	0.00%	1.93%	1.30%	0.06%	1.29%	24.20%	0.00%	4.36%	8.35%	27.96%	

5.4 Margin of Safety

The MOS is a required component of TMDL development. There are two basic methods for incorporating the MOS: 1) implicitly incorporate the MOS using conservative model assumptions to develop allocations; or 2) explicitly specify a portion of the TMDL as the MOS and use the remainder for allocations. For this TMDL, the MOS was implicitly incorporated in the use of conservative modeling assumptions, including the selection of average USLE factors, the use of the average sediment loading rates for the numeric targets, and the assumption that no BMPs were used.

5.5 Total Sediment Load

The total annual sediment load was determined by adding the WLA (WLA + WLAsw) and the LA. The MOS, as described above, was implicitly included in the TMDL analysis and does not factor directly into the TMDL equation as shown above.

The USLE method used calculates a total annual sediment load, as opposed to a daily load. The R factor from the USLE (the rainfall erosivity index) is statistically calculated from the annual summation of rainfall energy in every storm, which correlates to the raindrop size, times its maximum 30-minute intensity. Table 23 provides the rainfall statistics from six meteorological stations located throughout Georgia, and shows the variability of rainfall frequency and amount.

Table 23. Georgia Meteorological Rainfall Statistics

Station	Normal Monthly Precipitation (in.) / Avg. Days of Precipitation (0.1 in. or more)											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sept	Oct	Nov	Dec
Athens, GA	4.6/11	4.4/9	5.5/11	4.0/8	4.4/9	3.9/9	4.9/11	3.7/9	3.4/8	3.3/7	3.7/8	4.1/10
Atlanta, GA	4.8/11	4.8/10	5.8/11	4.3/9	4.3/9	3.6/10	5.0/12	3.7/10	3.4/8	3.1/6	3.9/8	4.3/10
Augusta, GA	4.1/10	4.3/9	4.7/10	3.3/8	3.8/9	4.1/9	4.2/11	4.5/10	3.0/7	2.8/6	2.5/7	3.4/9
Columbus, GA	4.6/10	4.9/10	5.8/10	4.3/8	4.2/8	4.1/9	5.5/13	3.7/10	3.2/8	2.2/5	3.6/8	5.0/10
Macon, GA	4.6/11	4.7/10	4.8/10	3.5/7	3.6/9	3.6/10	4.3/13	3.6/11	2.8/8	2.2/6	2.7/7	4.3/9
Savannah, GA	3.6/9	3.2/9	3.8/9	3.0/7	4.1/9	5.7/10	6.4/14	7.5/13	4.5/10	2.4/6	2.2/6	3.0/8

The allowable annual average sediment load expressed in terms of tons per acre per year is intended to prevent the cumulative impacts of excessive run-off related sediment in the watershed. The maximum daily allowable sediment load is a subcomponent of the allowable annual load. It is based upon the critical flow event that represents the maximum sediment load capacity for the stream. Research conducted by the Agricultural Research Service-National Sediment Laboratory and USEPA Region 4 has determined that the bankfull flow is the critical flow that has the maximum daily sediment carrying capacity, and therefore has the maximum daily sediment loading capacity. Bankfull flow can be estimated using the one-day flow event that occurs once every one and a half years, 1Q1.5, determined by the Log Pearson recurrence interval statistical analysis.

The National Sediment Laboratory has correlated, by ecoregion, a relationship between the annual average sediment load and the bankfull flow sediment load for stable or unimpaired streams. For the Piedmont ecoregion, the median bankfull flow sediment load expressed as tons per day per square kilometer is 2.54. This is 12.9 percent of the median annual average sediment load of 19.6 tons per year per square kilometer discharged into a stable unimpaired

stream. This relationship was used to transform total annual sediment loads to a daily maximum sediment loads.

The total annual sediment loads and daily maximum sediment loads for the impaired watershed are summarized in Table 24, along with any required sediment load reductions. The WLAs (WLA + WLAsw) provided in Table 24 are for accounting purposes. A Summary Memorandum of the impaired watershed is provided in Appendix A.

The USLE method used indicates that the largest sediment loads come from areas with close proximity to the stream grid, especially dirt roads and croplands. The model does not account for any BMPs that are currently being used to control erosion from these areas, and thus may overestimate some sediment loads.

Table 24. Total Annual Sediment Load and the Required Sediment Load Reduction

Name	Current Load (tons/yr)	WLA (tons/yr)	WLAsw (tons/yr)	LA (tons/yr)	Allowable Total Load (tons/yr)	Allowable Maximum Daily Load (tons/day)	% Reduction
Wasp Creek	43.6	0.3	5.4	37.1	42.8	5.5	0.0%

6.0 RECOMMENDATIONS

6.1 Monitoring

Monitoring is conducted at a number of locations across the State each year. GA EPD has adopted a basin approach to water quality management; an approach that divides Georgia's major river basins into five groups. This approach provides for additional sampling work to be focused on one of the five basin groups each year. The Flint River Basin, along with the Chattahoochee River Basin, were the basins of focused monitoring in 2000 and will again receive focused monitoring in 2010. One goal of the focused basin monitoring is to continue to monitor 303(d) listed waters. Therefore, additional monitoring of these streams will be initiated as appropriate during the next monitoring cycle to determine if there has been improvement in the biological communities.

6.2 Sediment Management Practices

Based on the findings of the source assessment, it was determined that most of the sediment found in the Flint River Basin streams is due to past land use practices and is referred to as "legacy" sediment. Therefore, it is recommended that there be no net increase in sediment delivered to the impaired stream segments, so that these streams will recover over time.

The measurement of sediment delivered to a stream is difficult, if not impossible, to determine. Therefore, setting a numeric TMDL may be ineffective given the difficulty in measuring it. In addition, changes in habitat and aquatic communities are usually slow to respond, which is why monitoring will continue according to the five-year monitoring cycle. Thus, this TMDL recommends that compliance with NPDES permits and implementation of Best Management Practices (BMPs) be monitored. The anticipated effects of compliance with NPDES permits and implementation of BMPs will be the improvement of stream habitats and water quality, and thus be an indirect measurement of the TMDL.

Management practices recommended to maintain the total annual sediment loads at current levels include:

- Compliance with NPDES permit limits and requirements;
- Implementation of GFC Best Management Practices for forestry;
- Adoption of NRCS Conservation Practices;
- Adherence to the Mined Land Use Plan prepared as part of the Surface Mining Permit Application;
- Adoption of proper unpaved road maintenance practices;
- Implementation of Erosion and Sedimentation Control Plans for land disturbing activities; and
- Mitigation and prevention of stream bank erosion due to increased stream flow and velocities caused by urban runoff.

6.2.1 Point Source Approaches

Point sources are defined as discharges of treated wastewater or storm water into rivers and streams at discrete locations. Treated wastewater tends to be discharged at relatively stable rates; whereas, storm water is discharged at irregular, intermittent rates, depending on precipitation and runoff. The NPDES permit program provides a basis for municipal, industrial and storm water permits, monitoring and compliance with limitations, and appropriate enforcement actions for violations.

In accordance with GA EPD rules and regulations, all NPDES dischargers in the watershed are required to meet their current NPDES permit limits. It is recommended that there be no authorized increase in the mass loading of sediment (TSS) above that identified in the TMDL. However, if there is available assimilative capacity, new discharges may be allowed based on engineering and current stream biological integrity studies.

The removal of mined material involves water pumped from the mine pit, and mineral processing involves the disposal of process waters. These waters are treated through either sedimentation ponds or detention basins prior to being discharged to the stream and are regulated by NPDES permits. It is recommended that the peak flow from mining sites be maintained at pre-development levels in order to control bank erosion and instabilities in the receiving stream. In addition, monitoring frequencies should be such that the total annual sediment loads coming from mining facilities can be characterized.

The GA EPD has developed a General Storm Water NPDES Permit for Construction Activities. The current permit is required for all construction sites disturbing one or more acres. In 2003, this permit will cover all construction sites disturbing one or more acres. All sites required to have this permit are authorized to discharge storm water associated with construction activity to the waters of the State in accordance with the limitations, monitoring requirements, and other conditions set forth in Parts I through VII of the Georgia Storm Water Permit. The permit requires all sites to have an Erosion and Sedimentation Control Plan; to implement, inspect and maintain BMPs; and to monitor storm water for turbidity. Georgia's General Storm Water Permit can be considered a water quality-based permit, in that the numeric limits in the permit, if met and enforced, will not cause a water quality problem.

It is recommended that construction sites within impaired watersheds located within 100 feet of the impaired stream, or its tributaries, use DIRT II techniques to model and manage storm water runoff from these sites. All construction sites will monitor their storm water runoff as required by the General Storm Water NPDES Permit for Construction Activities. It is also recommended that the peak flow from construction sites be maintained at pre-development levels.

6.2.2 Nonpoint Source Land Use Approaches

The GA EPD is responsible for administering and enforcing laws to protect the waters of the State. GA EPD is the lead agency for implementing the State's Nonpoint Source Management Program. Regulatory responsibilities include establishing water quality standards and use classifications, assessing and reporting water quality conditions, issuing point source permits, issuing water withdrawal and ground water permits, and regulating land-disturbing activities. Georgia is working with local governments, agricultural, and forestry agencies such as the Natural Resources Conservation Service, the Georgia Soil and Water Conservation Commission, and the Georgia Forestry Commission to foster the implementation of BMPs that address nonpoint source pollution. In addition, public education efforts are being targeted to individual stakeholders to provide information regarding the use of BMPs to protect water quality. The following sections describe in more detail the specific measures to reduce nonpoint sources of sediment by land use type.

6.2.2.1 Forested Land

In 1978, GA EPD designated the Georgia Forestry Commission (GFC) to be the lead agency in managing and implementing the silvicultural portion of Georgia's Nonpoint Source Management Program. The GFC is responsible for coordinating water quality issues with regard to forested land in Georgia. The GFC is basically responsible for:

- Developing Best Management Practices (BMPs) for the forestry industry,
- Educating the forestry community on BMPs, and
- Conducting site inspections for compliance with the established BMPs.

The GFC formed a Forestry Nonpoint Source Pollution Technical Task Force to assess the extent of water pollution caused by forestry practices, and develop recommendations to reduce or eliminate erosion and sedimentation. After a three-year field study, the task force developed a set of BMPs that address all aspects of silviculture, including forest road construction, timber harvesting, site preparation, and forest regeneration. The task force recommended the BMPs be implemented through a voluntary program, exempt from permitting under the Georgia Erosion and Sedimentation Control Act, emphasizing educational and training programs instead. In 1997, the original BMP document was revised to incorporate the 1989 Wetland BMP manual developed by the Georgia Forestry Association. The current BMP manual, *Georgia's Best Management Practices for Forestry*, was developed and became effective January 1, 1999 (GA EPD, 1999).

It is the responsibility of the GFC to educate and inform the forest community (landowners, procurement and land management foresters, consulting foresters, loggers, site prep and tree planting contractors) on the importance of BMPs. The GFC statewide coordinator and the twelve district coordinators conduct educational programs across the state. The district coordinators receive specialized training in erosion and sediment control, forest road layout and construction, stream habitat assessment, rapid bioassessment (macroinvertebrate) monitoring, wetland delineation, and fluvial geomorphology. The GFC has developed training videos, slide programs, tabletop exhibits, and BMP billboards that are displayed at wood yards across the state. For the benefit of private landowners selling timber, the GFC has developed a Sample Forest Products Sale Agreement, which includes fill in the blank spaces for specific BMP incorporation. Since December 1995, the GFC has been cooperating with the University of Georgia School of Forest Resources, the Georgia Forestry Association, and American Forest and Paper Association (AFPA) member companies in the ongoing education of loggers and timber buyers through the Sustainable Forestry Initiative (SFI) Master Timber Harvester program. This includes an intensive training session on the BMPs conducted by the GFC.

To determine if educational efforts have been successful and if the BMPs are effective at minimizing erosion and sedimentation, the GFC conducted BMP compliance surveys in 1991 and 1992. In 1998, another BMP survey was conducted using a newly developed and more rigorous protocol recommended by a Southern Group of State Foresters (SGSF) Task Force. The GFC sampled about 10 percent of the forestry operations that occur annually. The number of samples taken in each county was based on the volume of wood harvested as reported in the state's latest Product Drain Report. Sites were randomly selected to reflect various forest types (non-industrial private forest, forest industry, and publicly owned lands). The survey results show that of the number of acres evaluated, the number in BMP compliance for the most part was very good. In 1991, approximately 86 percent of the acres evaluated were in compliance. In 1992, the figure increased to 92 percent compliance and in 1998, compliance rose to 98 percent.

The GFC also investigates and mediates complaints or concerns involving forestry operations on behalf of the GA EPD and the Army Corps of Engineers (COE) when stream water quality and wetlands are involved, respectively. Complaints from citizens are common, particularly in counties growing in population where landowners are living close to commercial forestry operations. After notifying the forest owner, the GFC District Coordinator conducts a field inspection to determine if BMPs were followed, if the potential for water quality problems exists, and who is the responsible party. If the complaint is valid, GFC will work with the responsible

party until the problem is corrected. However, the GFC has no regulatory authority. In situations where the GFC cannot get satisfactory compliance, the case is turned over to GA EPD or COE for enforcement actions under the Georgia Water Quality Control Act or Section 404 of the Federal Clean Water Act.

It is recommended that the GFC continue to encourage BMP implementation, educational training programs, and site compliance surveys. The numbers of individuals trained and site compliance inspections should be recorded each year. In addition, the number of complaints received, the actions taken, and enforcement actions written should be recorded.

6.2.2.2 Agricultural Land

There are a number of agricultural organizations that work to support Georgia's more than 40,000 farmers. The following three organizations have primary responsibility for working with farmers to promote soil and water conservation:

- The University of Georgia - Cooperative Extension Service
- Georgia Soil and Water Conservation Commission
- Natural Resources Conservation Service

The University of Georgia (UGA) has faculty, County Cooperative Extension Agents, and technical specialists who provide services in several key areas relating to agricultural impacts on water quality. These include classroom instruction, basic and applied research, consulting assistance, and information on nonpoint source water quality impacts.

The Georgia Soil and Water Conservation Commission (GSWCC) was created in 1937 by a Georgia Legislative Act. In 1977, GA EPD designated the GSWCC as the lead agency for agricultural Nonpoint Source Management in the State. The GSWCC develops nonpoint source management programs and conducts educational activities to promote conservation and protection of land and water devoted to agricultural uses. In September 1994, the GSWCC developed a BMP manual, *Agricultural Best Management Practices for Protecting Water Quality in Georgia*, for the agricultural community (GSWCC, 1994).

The Natural Resources Conservation Service (NRCS) cooperates with Federal, State, and local governments to provide financial and technical assistance to farmers. NRCS develops standards and specifications for BMPs that are to be used to improve, protect, or maintain our State's natural resources. Practice standards establish the minimum level of acceptable quality for planning, designing, installing, operating, and maintaining BMPs. Practice specifications describe the technical details and workmanship required to install a BMP and the quality and extent of materials to be used in a BMP.

The NRCS provides Conservation Practice Standards, found in the electronic Field Office Technical Guide (FOTG), on their website (<http://www.nrcs.usda.gov/technical/efotg/>). Some of these BMPs may be used for farming operations to reduce soil erosion. It is recommended that the agricultural communities with cropland close to impaired streams, and pastureland where grazing animals have access to the stream, investigate the various BMPs available to them in order to reduce soil erosion and bank collapse.

The 1996 Farm Bill and PL83-566 Small Watershed Program provided new financial assistance programs to address high priority environmental protection goals. Some programs that specifically address erosion and sedimentation are:

- The Environmental Quality Incentives Program
- Conservation Reserve Program
- Small Watershed Program

The Environmental Quality Incentives Program (EQIP) is a USDA cost-share program available to farmers to address natural resource problems. EQIP offers financial, educational and technical assistance funding for installing BMPs that reduce soil erosion, improve water quality, or enhance wildlife habitats.

The Conservation Reserve Program (CRP) was originally designed to provide incentive and offer assistance to farmers to convert highly erodible and other environmentally sensitive land normally devoted to crop production, to land with other long-term resource-conserving cover. CRP has been expanded to place eligible acreage into filter strips, riparian buffers, grassed waterways, or contour grass strips. Each of these practices helps to reduce erosion and sedimentation and improve water quality.

The Small Watershed Program provides financial and technical assistance funding for the installation of BMPs in watersheds less than 250,000 acres. This program is used to augment ongoing conservation programs where serious natural resource degradation has or is occurring. Agricultural water management, which includes projects that reduce soil erosion and sedimentation and improve water quality, is one of the eligible purposes of this program. NRCS is authorized by Public Law 83-566 to conduct river basin surveys and investigations. The NRCS River Basin Planning Program is designed to collect data on natural resource conditions within river basins of focus. NRCS is providing technical assistance to the GSWCC and the GA EPD with the Georgia River Basin Planning Program. Planning activities associated with this program will describe conditions of the agricultural natural resource base once every five years.

Every five years, the NRCS conducts the National Resources Inventory (NRI). The NRI is a statistically based sample of land use and natural resource conditions and trends, and it covers non-federal land in the United States. The NRI found that the total wind and water erosion on cropland and Conservation Reserve Program land in Georgia declined 38 percent from 3.1 billion tons per year in 1982 to 1.9 billion tons per year in 1997 (USDA-NRCS, 1997).

NRCS also provides a web-based database application (Performance Results System, PRS) so conservation partners and the public can gain fast and easy access to the accomplishments and the progress made toward strategies and performance goals. The web site is <http://ias.sc.egov.usda.gov/prshome/default.html>.

It is recommended that the GSWCC and the NRCS continue to encourage BMP implementation, education efforts, and river basin surveys with regard to River Basin Planning. The five year National Resources Inventory should be continued and GA EPD supports the PRS website.

6.2.2.3 Mine Sites

Surface mining and mineral processing present two threats to surface waters. The first threat is the wastewater from mining and mineral processing operations. These discharges are considered point sources, and are therefore regulated by NPDES permits and were discussed in Section 6.2.1 above. The second threat involves mine reclamation activities. Reclamation occurs throughout the mining operation. From the first cut to the last, overburden is moved twice. With each movement of the soil and rock debris, the overburden must be managed to

prevent soil and mineral erosion. Until the mine is re-vegetated, and hence reclaimed, BMPs must be implemented to prevent nonpoint source pollution.

The Georgia Surface Mining Act of 1968 provides for the issuance of mining permits at the discretion of the Director of GA EPD. These permits are administered by the Land Protection Branch of GA EPD. The surface mining permit application must include a Mined Land Use Plan, reclamation strategies, and surety bond requirements to guarantee proper management and reclamation of surface mined areas. The Mined Land Use Plan specifies activities prior to, during, and following mining to dispose of refuse and control erosion and sedimentation. The reclamation strategy includes the use of operational BMPs and procedures. The BMPs used are drawn from the *Manual for Erosion and Sedimentation Control in Georgia, Georgia's Best Management Practices for Forestry*, and from other states. Thus, the issuance of a surface mining permit in effect addresses BMPs to control nonpoint source pollutants. The regional GA EPD offices monitor and inspect surface mining sites to assess permit compliance.

It is recommended that special attention be given to those facilities located in impaired watersheds. The implementation and maintenance of BMPs used to control erosion should be reviewed during the site inspections.

The Georgia Mining Association (GMA) is an informal trade association of the mining industry. It serves more than 200 members, 47 mining companies and over 150 associate companies. The association monitors legislative developments and coordinates industry response. It educates miners about laws and regulations that affect them and provides a forum for the exchange of ideas. Through its newsletters, seminars, workshops, and annual conventions, the GMA serves as a source for mining industry information. It has several committees, including the Environmental Committee, that meet three to four times a year. The mining industry is conducting informal discussions on the potential of developing industry-wide standards for BMPs to prevent and reduce nonpoint source pollution. If these standards are adopted, the mining industry would likely conduct demonstration projects to gauge the effectiveness of the BMPs.

6.2.2.4 Roads

Unpaved roads can be a major contributor of sediment to our waterways if not properly managed. The following guidance for the maintenance and service of unpaved roadways, drainage ditches, and culverts can be used to minimize roadway erosion. One publication that may include some additional guidance is *Recommended Practices Manual, A Guideline for Maintenance and Service of Unpaved Roads* (Choctawhatchee, et. al, 2000).

Disturbances to unpaved roadway surfaces and ditches, and poor road surface drainage, result in deterioration of the road surface. This leads to increased roadway erosion and, thus, stream sedimentation. Unpaved roads are typically maintained by blading and / or scraping of the roads to remove loose material. Proper, timely, and selective surface maintenance can prevent and minimize erosion of unpaved roadways. This in turn lengthens the life of the road and reduces maintenance costs. Roadway blading that occurs during periods when there is enough moisture content allows for immediate re-compaction. In addition, roadwork performed near streams or stream-crossings during "dry" months of the year can reduce the amount of sediment that enters a stream.

Roadside ditches convey storm water runoff to an outlet. A good drainage ditch is shaped and lined with appropriate vegetative or structural material. A well-vegetated ditch slows, controls and filters the storm water runoff, providing an opportunity for sediments to be removed from the runoff before it enters surface waters. Energy dissipating structures to reduce velocity,

dissipate turbulence or flatten flow grades in ditches are often necessary. Efficient disposal of runoff from the road helps preserve the roadbed and banks. Properly installed “turn-outs” or intermittent discharge points help to maintain a stable velocity and proper flow capacity within the ditch by timely outletting water from them. This in turn alleviates roadway flooding, erosion, and maintenance problems. Properly placed “turn-outs” distribute roadway runoff and sediments over a larger vegetative filtering area, helping to reduce road side ditch maintenance to remove accumulated sediment.

Culverts are conduits used to convey water from one side of a road to another. Installation, modification, and / or improvements of culverts when stream flows and expected rainfall is low can reduce the amount of sediment that enters a stream. If the entire installation process, from beginning to end, can be completed before the next rainfall event, stream sedimentation can be minimized. Diverting all existing or potential stream flows while the culvert is being installed can also help reduce or avoid sedimentation below the installation. The culvert design can have a significant impact on the biological community if the size and species of fish passing through it are not considered. Changes in water velocities and the creation of vertical barriers affect the biological communities.

6.2.2.5 Urban Development

The Erosion and Sedimentation Act, established in 1975, provides the mechanism for controlling erosion and sedimentation from land-disturbing activities. This Act establishes a permitting process for land-disturbing activities. Many local governments and counties have adapted erosion and sedimentation ordinances and have been given authority to issue and enforce permits for land-disturbing activities. Approximately 32 counties and 240 municipalities in Georgia have been certified as the local issuing authority. In areas where local governments have not been certified as an issuing authority, the GA EPD is responsible for permitting, inspecting, and enforcing the Erosion and Sedimentation Act.

To receive a land-disturbing permit, an applicant must submit an erosion and sedimentation control plan that incorporates specific conservation and engineering BMPs. The *Field Manual for Erosion and Sediment Control in Georgia*, developed by the State Soil and Water Conservation Commission, may be used as a guide to develop erosion and sedimentation control plans (GSWCC, 1997).

Local governments, with oversight by the GA EPD, and the Soil and Water Conservation Districts, are primarily responsible for implementing the Georgia Erosion and Sedimentation Act, O.C.G.A. §12-7-1 (amended in 2003). Reports of suspected violations are made to the agency that issued the permit. In cases with local issuing authority, if the violation continues, the complaint is referred to the appropriate Soil and Water Conservation District. If the situation remains unresolved, the complaint is then referred to GA EPD for enforcement action. Enforcement may include administrative orders, injunctions, and civil penalties. It is recommended that the local and state governments continue to work to implement the provisions of the Georgia Erosion and Sedimentation Act across Georgia.

Storm water runoff from developed urban areas (post-construction) can also have an impact on the transport of sediment to and within streams. Urbanization increases imperviousness, resulting in an increase in the volume of runoff that enters the streams. In addition, the stream flow rates may increase significantly from pre-construction rates. These changes in the stream flow can result in stream bank erosion and stream bottom down cutting. It is recommended that local governments review and consider implementation of practices presented in the *Land Development Provisions to Protect Georgia Water Quality* (GA EPD, 1997). Additional information on site design and best management practices to address stormwater run-off may

be found in the *Georgia Stormwater Management Manual* (the "Blue Book") (ARC, 2001) and Georgia's *Green Growth Guidelines* (GADNR, 2005), both of which are available electronically via the internet.

6.3 Reasonable Assurance

Permitted discharges will be regulated through the NPDES permitting process described in this report. Through its NPDES permitting process, GA EPD will determine whether a new discharger has a reasonable potential of discharging sediment levels equal to or greater than the total allocated load. The results of this reasonable potential analysis will determine the specific requirements in an individual facility's NPDES permit. As part of its analysis, the GA EPD will use its EPA approved 2003 NPDES Reasonable Potential Procedures to determine whether monitoring requirements or effluent limitations are necessary.

Georgia is working with local governments, agricultural and forestry agencies, such as the Natural Resources Conservation Service, the Georgia Soil and Water Conservation Commission, and the Georgia Forestry Commission, to foster the implementation of best management practices to address nonpoint sources. In addition, public education efforts will be targeted to individual stakeholders to provide information regarding the use of best management practices to protect water quality.

6.4 Public Participation

A thirty-day public notice was provided for this TMDL. During this time, the availability of the TMDL was public noticed, a copy of the TMDL was provided as requested, and the public was invited to provide comments on the TMDL.

7.0 INITIAL TMDL IMPLEMENTATION PLAN

GA EPD has coordinated with EPA to prepare this Initial TMDL Implementation Plan for this TMDL. GA EPD has also established a plan and schedule for development of a more comprehensive implementation plan after this TMDL is established. GA EPD and EPA have executed a Memorandum of Understanding that documents the schedule for developing the more comprehensive plans. This Initial TMDL Implementation Plan includes a list of best management practices and provides for an initial implementation demonstration project to address one of the major sources of pollutants identified in this TMDL while State and / or local agencies work with local stakeholders to develop a revised TMDL implementation plan. It also includes a process whereby GA EPD and / or Regional Development Centers (RDCs) or other GA EPD contractors (hereinafter, "GA EPD Contractors") will develop expanded plans (hereinafter, "Revised TMDL Implementation Plans").

This Initial TMDL Implementation Plan, written by GA EPD and for which GA EPD and / or the GA EPD Contractor are responsible, contains the following elements.

1. EPA has identified a number of management strategies for the control of nonpoint sources of pollutants, representing some best management practices. The "Management Measure Selector Table" shown below identifies these management strategies by source category and pollutant. Nonpoint sources are the primary cause of excessive pollutant loading in most cases. Any wasteload allocations in this TMDL will be implemented in the form of water-quality based effluent limitations in NPDES permits issued under CWA Section 402. See 40 C.F.R. § 122.44(d)(1)(vii)(B). NPDES permit discharges are a secondary source of excessive pollutant loading, where they are a factor, in most cases.
2. GA EPD and the GA EPD Contractor will select and implement one or more best management practice (BMP) demonstration projects for each River Basin. The purpose of the demonstration projects will be to evaluate by River Basin and pollutant parameter the site-specific effectiveness of one or more of the BMPs chosen. GA EPD intends that the BMP demonstration project be completed before the Revised TMDL Implementation Plan is issued. The BMP demonstration project will address the major category of contribution of the pollutant(s) of concern for the respective River Basin as identified in the TMDLs of the watersheds in the River Basin. The demonstration project need not be of a large scale, and may consist of one or more measures from the Table or equivalent BMP measures proposed by the GA EPD Contractor and approved by GA EPD. Other such measures may include those found in EPA's "Best Management Practices Handbook", the "NRCS National Handbook of Conservation Practices," or any similar reference, or measures that the volunteers, etc., devise that GA EPD approves. If for any reason the GA EPD Contractor does not complete the BMP demonstration project, GA EPD will take responsibility for doing so.
3. As part of the Initial TMDL Implementation Plan, the GA EPD brochure entitled "Watershed Wisdom -- Georgia's TMDL Program" will be distributed by GA EPD to the GA EPD Contractor for use with appropriate stakeholders for this TMDL, and a copy of the video of that same title will be provided to the GA EPD Contractor for its use in making presentations to appropriate stakeholders on TMDL implementation plan development.

4. If for any reason an GA EPD Contractor does not complete one or more elements of a Revised TMDL Implementation Plan, GA EPD will be responsible for getting that (those) element(s) completed, either directly or through another contractor.
5. The deadline for development of a Revised TMDL Implementation Plan is the end of September 2010.
6. The GA EPD Contractor helping to develop the Revised TMDL Implementation Plan, in coordination with GA EPD, will work on the following tasks involved in converting the Initial TMDL Implementation Plan to a Revised TMDL Implementation Plan:
 - A. Generally characterize the watershed;
 - B. Identify stakeholders;
 - C. Verify the present problem to the extent feasible and appropriate, (e.g., local monitoring);
 - D. Identify probable sources of pollutant(s);
 - E. For the purpose of assisting in the implementation of the load allocations of this TMDL, identify potential regulatory or voluntary actions to control pollutant(s) from the relevant nonpoint sources;
 - F. Determine measurable milestones of progress;
 - G. Develop a monitoring plan, taking into account available resources, to measure effectiveness; and
 - H. Complete and submit to GA EPD the Revised TMDL Implementation Plan.
7. The public will be provided an opportunity to participate in the development of the Revised TMDL Implementation Plan and to comment on it before it is finalized.
8. The Revised TMDL Implementation Plan will supersede this Initial TMDL Implementation Plan when the Revised TMDL Implementation Plan is approved by GA EPD.

Management Measure Selector Table

Land Use	Management Measures	Fecal Coliform	Dissolved Oxygen	pH	Sediment	Temperature	Toxicity	Mercury	Metals (copper, lead, zinc, cadmium)	PCBs, toxaphene
Agriculture	1. Sediment & Erosion Control	—	—		—	—				
	2. Confined Animal Facilities	—	—							
	3. Nutrient Management	—	—							
	4. Pesticide Management		—							
	5. Livestock Grazing	—	—		—	—				
	6. Irrigation		—		—	—				
Forestry	1. Preharvest Planning				—	—				
	2. Streamside Management Areas	—	—		—	—				
	3. Road Construction & Reconstruction		—		—	—				
	4. Road Management		—		—	—				
	5. Timber Harvesting		—		—	—				
	6. Site Preparation & Forest Regeneration		—		—	—				
	7. Fire Management	—	—	—	—	—				
	8. Revegetation of Disturbed Areas	—	—	—	—	—				
	9. Forest Chemical Management		—			—				
	10. Wetlands Forest Management	—	—	—		—		—		

Land Use	Management Measures	Fecal Coliform	Dissolved Oxygen	pH	Sediment	Temperature	Toxicity	Mercury	Metals (copper, lead, zinc, cadmium)	PCBs, toxaphene
Urban	1. New Development	—	—		—	—			—	
	2. Watershed Protection & Site Development	—	—		—	—		—	—	
	3. Construction Site Erosion and Sediment Control		—		—	—				
	4. Construction Site Chemical Control		—							
	5. Existing Developments	—	—		—	—			—	
	6. Residential and Commercial Pollution Prevention	—	—							
Onsite Wastewater	1. New Onsite Wastewater Disposal Systems	—	—							
	2. Operating Existing Onsite Wastewater Disposal Systems	—	—							
Roads, Highways and Bridges	1. Siting New Roads, Highways & Bridges	—	—		—	—			—	
	2. Construction Projects for Roads, Highways and Bridges		—		—	—				
	3. Construction Site Chemical Control for Roads, Highways and Bridges		—							
	4. Operation and Maintenance-Roads, Highways and Bridges	—	—			—			—	

REFERENCES

- ARC, 2001. *Georgia Stormwater Management Manual*, Atlanta Regional Commission, August 2001.
- Choctawhatchee, Pea and Yellow Rivers Watershed Management Authority, 2000. *Recommended Practices Manual, A Guideline for Maintenance and Service of Unpaved Roads*, February 2000.
- Coastal Georgia RDC, 2005. *Green Growth Guidelines: A Low Impact Development Strategy for Coastal Georgia*, Coastal Georgia Regional Development Center, 2005.
- GA EPD, 1997. *Land Development Provisions to Protect Georgia Water Quality*, Georgia Department of Natural Resources, Environmental Protection Division, October 1997.
- GA EPD, 2000-2001. *Water Quality in Georgia, 2000-2001*, Georgia Department of Natural Resources, Environmental Protection Division.
- GAEPD, 1998. *Flint River Basin Management Plan 1997*, Georgia Department of Natural Resource, Environmental Protection Division.
- GA EPD, 1999. *Georgia's Best Management Practices for Forestry*, Georgia Department of Natural Resources, Georgia Forestry Commission, Georgia Forestry Association, January 1999.
- GA EPD, 2000. *Georgia Nonpoint Source Management Program FFY 2000 Update*, Georgia Department of Natural Resources, Environmental Protection Division, Water Protection Branch, August 2000.
- GA EPD, *Rules and Regulations for Surface Mining, 391-3-3*, Georgia Department of Natural Resources, Environmental Protection Division.
- GA EPD, *Rules and Regulations For Water Quality Control, Chapter 391-3-6*, Georgia Department of Natural Resources, Environmental Protection Division, Revised Nov. 2005.
- GA EPD, *Rules for Erosion and Sedimentation Control, Chapter 391-3-7*, Georgia Department of Natural Resources, Environmental Protection Division, Revised January 2005.
- GSWCC, 1994. *Agricultural Best Management Practices for Protecting Water Quality in Georgia*, Georgia Soil and Water Conservation Commission, Athens, Georgia, September 1994.
- GSWCC, 2005. *Field Manual for Erosion and Sediment Control in Georgia*, Georgia Soil and Water Conservation Commission, Athens, Georgia, 2005.
- GAWDR, 2000. *Draft Standard Operating Procedures for Conducting Biomonitoring on Fish Communities in the Piedmont Ecoregion of Georgia*, Georgia Department of Natural Resources, Wildlife Resources Division, Fisheries Section, Revised June 9, 2000.
- GAWPB, 2000. *Draft Standard Operating Procedures Freshwater Macroinvertebrate Biological Assessment*, Georgia Department of Natural Resources, Water Protection Branch, 2000.

Thomas, Michael T., 1997. *Forest Statistics for Georgia*.

USDA-NRCS, 1997. National Resources Inventory, USDA-NCRS, Athens, Georgia.

USEPA, 1991. *Guidance for Water Quality –based Decisions: The TMDL Process*. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. EPA-440 / 4-91-001, April 1991.

USEPA, 1998. *Better Assessment Science Integrating Point and Nonpoint Sources (BASINS), Version 2.0 User's Manual*, U.S. Environmental Protection Agency, Office of Water, Washington D.C.

USEPA, 1999a. *1999 Update of Ambient Water Quality Criteria*, U.S. Environmental Protection Agency, Office of Water, Washington, D.C. EPA-822-R-99-014, December 1999.

USEPA, 1999b. *Protocol for Developing Sediment TMDLs*, First Edition, U.S. Environmental Protection Agency, Office of Water, Washington, D.C.

USEPA, 2000. *Watershed Characterization System - User's Manual*, U.S. Environmental Protection Agency, Region IV, Atlanta, Georgia, 2000.

USEPA, 2001a. Watershed Characterization System (WCS) Data, Georgia, U.S. Tetra Tech, Environmental Protection Agency, Region IV, Atlanta, Georgia, Jan. 31, 2001.

USEPA, 2001b. *Total Maximum Daily Load (TMDL) Development for Sediment in the Chattooga River Watershed*, April 2001.

APPENDIX A

Annual Average Sediment Load Summary Memorandum

**SUMMARY MEMORANDUM
Annual Average Sediment Load
Wasp Creek**

1. 303(d) Listed Waterbody Information

State: Georgia
County: Spalding/Pike

Major River Basin: Flint
8-Digit Hydrologic Unit Code(s): 03130005

Waterbody Name: Wasp Creek
Location: Headwaters to Little Wasp Creek
Stream Length: 5 miles
Watershed Area: 1.24 square miles
Tributary to: Potato Creek
Ecoregion: Piedmont Plains

Constituent(s) of Concern: Sediment

Designated Use: Fishing (partially supporting designated use)

Applicable Water Quality Standard:

All waters shall be free from material related to municipal, industrial or other discharges which produce turbidity, color, odor or other objectionable conditions which interfere with legitimate water uses.

2. TMDL Development

Analysis/Modeling:

Universal Soil Loss Equation was used to determine the average annual sediment load

3. Allocation Watershed/Stream Reach:

Wasteload Allocations (WLA):

Moose Lodge #1503 0.3 tons/yr
Future Construction Sites Meet requirements of General Storm Water Permit

Wasteload Allocations (WLA_{SW}): 5.4 tons/yr

Load Allocation (LA) : 37.1 tons/yr

Margin of Safety (MOS): implicit

Annual Average Sediment Load: 42.8 tons/yr

Maximum Daily Sediment Load: 5.5 tons/day