

**GROUNDWATER QUALITY IN GEORGIA
FOR 2017**

Anthony W. Chumbley and John R. Scroggs

**GEORGIA DEPARTMENT OF NATURAL RESOURCES
ENVIRONMENTAL PROTECTION DIVISION
WATERSHED PROTECTION BRANCH
WATERSHED PLANNING AND MONITORING PROGRAM**

ATLANTA
2020

CIRCULAR 12AE

**GROUNDWATER QUALITY IN GEORGIA
FOR 2017**

Anthony W. Chumbley and John R. Scroggs

The preparation of this report was funded in part through a grant from the U.S. Environmental Protection Agency under the provisions of Section 106 of the Federal Water Pollution Control Act of 1972, as amended.

**GEORGIA DEPARTMENT OF NATURAL RESOURCES
Mark Williams, Commissioner**

**ENVIRONMENTAL PROTECTION DIVISION
Richard E. Dunn, Director**

**WATERSHED PROTECTION BRANCH
James A. Capp, Branch Chief**

**ATLANTA
2020**

CIRCULAR 12AE

TABLE OF CONTENTS

CHAPTER 1 <u>INTRODUCTION</u>	<u>1-1</u>
1.1 PURPOSE AND SCOPE	1-1
1.2 FACTORS AFFECTING CHEMICAL GROUND-WATER QUALITY	1-2
1.3 HYDROGEOLOGIC PROVINCES OF GEORGIA	1-3
1.3.1 Coastal Plain Province	1-3
1.3.2 Piedmont/Blue Ridge Province	1-5
1.3.3 Valley and Ridge Province	1-5
1.3.4 Appalachian Plateau Province	1-6
1.4 REGIONAL GROUND-WATER PROBLEMS	1-6
CHAPTER 2 <u>GEORGIA GROUND-WATER MONITORING NETWORK</u>	<u>2-1</u>
2.1 MONITORING STATIONS	2-1
2.2 USES AND LIMITATIONS	2-1
2.3 ANALYSES AND DATA RETENTION	2-3
CHAPTER 3 <u>CHEMICAL GROUND-WATER QUALITY IN GEORGIA</u>	<u>3-1</u>
3.1 OVERVIEW	3-1
3.2 CRETACEOUS AQUIFER SYSTEM	3-3
3.2.1 Aquifer System Description	3-3
3.2.2 Field Parameters	3-3
3.2.3 Major Anions, Non-Metals, and Volatile Organic Compounds	3-5
3.2.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP)	3-5
3.2.5 Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)	3-5

3.3 CLAYTON AQUIFER.....	3-6
3.3.1 Aquifer Description.....	3-6
3.3.2 Field Parameters.....	3-6
3.3.3 Major Anions, Non-Metals, and Volatile Organic Compounds.....	3-6
3.3.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP).....	3-8
3.3.5 Metals by Inductively-Coupled Plasma/Mass Spectrometry (ICPMS).....	3-8
3.4 CLAIBORNE AQUIFER.....	3-8
3.4.1 Aquifer Description.....	3-8
3.4.2 Field Parameters.....	3-9
3.4.3 Major Anions, Non-Metals, and Volatile Organic Compounds.....	3-9
3.4.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP).....	3-9
3.4.5 Metals by Inductively-Coupled Plasma/Mass Spectrometry (ICPMS).....	3-9
3.5 JACKSONIAN AQUIFER.....	3-11
3.5.1 Aquifer Description.....	3-11
3.5.2 Field Parameters.....	3-11
3.5.3 Major Anions, Non-Metals, and Volatile Organic Compounds.....	3-11
3.5.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP).....	3-13
3.5.5 Metals by Inductively-Coupled Plasma/Mass Spectrometry (ICPMS).....	3-13
3.6 FLORIDAN AQUIFER SYSTEM.....	3-13
3.6.1 Aquifer System Characteristics	3-13
3.6.2 Field Parameters.....	3-14
3.6.3 Major Anions, Non-Metals, and Volatile Organic Compounds.....	3-15

3.6.4 <i>Metals by Inductively-Coupled Plasma Spectrometry (ICP)</i>	3-15
3.6.5 <i>Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)</i>	3-17
3.7 MIOCENE/SURFICIAL AQUIFER SYSTEM	3-18
3.7.1 <i>Aquifer System Characteristics</i>	3-18
3.7.2 <i>Field Parameters</i>	3-18
3.7.3 <i>Major Anions, Non-Metals, and Volatile Organic Compounds</i>	3-19
3.7.4 <i>Metals by Inductively-Coupled Plasma Spectrometry (ICP)</i>	3-19
3.7.5 <i>Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)</i>	3-19
3.8. PIEDMONT/BLUE RIDGE AQUIFER SYSTEM	3-21
3.8.1 <i>Aquifer System Characteristics</i>	3-21
3.8.2 <i>Field parameters</i>	3-23
3.8.3 <i>Major Anions, Non-Metals, and Volatile Organic Compounds</i>	3-24
3.8.4 <i>Metals by Inductively-Coupled Plasma Spectrometry (ICP)</i>	3-24
3.8.5 <i>Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)</i>	3-25
3.9 VALLEY AND RIDGE/APPALACHIAN PLATEAU AQUIFER SYSTEM	3-26
3.9.1 <i>Aquifer System Characteristics</i>	3-26
3.9.2 <i>Field Parameters</i>	3-26
3.9.3 <i>Major Anions, Non-Metals, and Volatile Organic Compounds</i>	3-27
3.9.4 <i>Metals by Inductively-Coupled Plasma Spectrometry (ICP)</i>	3-27
3.9.5 <i>Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)</i>	3-27

CHAPTER 4 <u>SUMMARY AND CONCLUSIONS</u>	4-1
4.1 PHYSICAL PARAMETERS AND pH	4-1
4.1.1 <i>pH</i>	4-1
4.1.2 <i>Conductivity</i>	4-2
4.1.3 <i>Temperature</i>	4-3
4.2 ANIONS, NON-METALS AND VOCS	4-3
4.2.1 <i>Chloride and Fluoride</i>	4-3
4.2.2 <i>Sulfate</i>	4-3
4.2.3 <i>Nitrate/Nitrite</i>	4-4
4.2.4 <i>Phosphorus</i>	4-4
4.2.5 <i>Dissolved Oxygen</i>	4-4
4.2.6 <i>Volatile Organic Compounds</i>	4-5
4.3 ICP METALS	4-5
4.3.1 <i>Aluminum</i>	4-5
4.3.2 <i>Iron and Manganese</i>	4-6
4.3.3 <i>Calcium, Magnesium, Sodium, and Potassium</i>	4-6
4.4 ICPMS METALS	4-7
4.4.1 <i>Chromium and Nickel</i>	4-7
4.4.2 <i>Arsenic, Selenium, Uranium, and Molybdenum</i>	4-7
4.4.3 <i>Copper, Lead, and Zinc</i>	4-8
4.4.4 <i>Barium</i>	4-8
4.5 CONTAMINATION OCCURRENCES	4-8
4.5.1 <i>Primary MCL and Action Level Exceedances</i>	4-9

<i>4.5.2 Secondary MCL Exceedances</i>	4-9
<i>4.5.3 Volatile Organic Compounds</i>	4-10
4.6 GENERAL QUALITY	4-16
5.0 <u>CHAPTER 5 LIST OF REFERENCES</u>	5-1

APPENDIX

Laboratory and Station Data.....	A-1
----------------------------------	-----

LIST OF FIGURES

Figure 1-1. <u>The Hydrogeologic Provinces of Georgia</u>	1-4
Figure 3-1. <u>The Major Aquifers and Aquifer Systems of the Coastal Plain Province</u>	3-2
Figure 3-2. <u>Locations of Stations Monitoring the Cretaceous Aquifer System</u>	3-4
Figure 3-3. <u>Location of the Stations Monitoring the Clayton Aquifer</u>	3-7
Figure 3-4. <u>Locations of Stations Monitoring the Claiborne Aquifer</u>	3-10
Figure 3-5. <u>Locations of Stations Monitoring the Jacksonian Aquifer</u>	3-12
Figure 3-6. <u>Locations of Stations Monitoring the Floridan Aquifer System</u>	3-16
Figure 3-7. <u>Locations of Stations Monitoring the Miocene/Surficial Aquifer System</u>	3-20
Figure 3-8. <u>Locations of Stations Monitoring the Piedmont/Blue Ridge Aquifer System</u>	3-22
Figure 3-9. <u>Locations of Stations Monitoring the Valley-and-Ridge/ Appalachian Plateau Aquifer System</u>	3-28

LIST OF TABLES

Table 2-1. Georgia Ground-Water Monitoring Network, Calendar Year 2017.....	2-2
Table 4-1. Contaminant Exceedances, Calendar Year 2017.....	4-11
Table 4-2. VOC Detection Incidents, Calendar Year 2017.....	4-15
Table A-1. Ground-Water Quality Analyses for Cretaceous/ Providence Stations.....	A-2

Table A-2. Ground-Water Quality Analyses for Clayton Stations.....	A-6
Table A-3. Ground-Water Quality Analyses for Claiborne Stations.....	A-8
Table A-4. Ground-Water Quality Analyses for Jacksonian Stations.....	A-10
Table A-5. Ground-Water Quality Analyses for Floridan Stations.....	A-12
Table A-6. Ground-Water Quality Analyses for Miocene Stations.....	A-18
Table A-7. Ground-Water Quality Analyses for Piedmont-Blue Ridge Stations.....	A-20
Table A-8. Ground-Water Quality Analyses for Valley-and-Ridge/ Appalachian Plateau Stations.....	A-26
Table A-9. Analytes, EPA Analytical Methods, and Reporting Limits.....	A-28
Table A-10. Analytes, Primary MCLs, and Secondary MCLs.....	A-31

CHAPTER 1 INTRODUCTION

1.1 PURPOSE AND SCOPE

This report, covering the calendar year 2017, is the thirty-first of the Circular 12 series. The first 19 reports, Circulars 12A through 12S, summarized the chemical quality of groundwater statewide across Georgia and utilized a static array of sampling stations that were sampled periodically, typically on a semiannual, annual, or biennial basis. The next five reports, Circulars 12T through 12X, dealt with specialized chemical groundwater quality issues: water quality in the Coastal region, water quality available to small public water systems, water quality in the Piedmont/Blue Ridge physiographic province, groundwater uranium in Georgia and groundwater arsenic in Georgia. With this report and its predecessors, Circular 12Y, 12Z, 12AA, 12AB, 12AC and 12AD, continuing to monitor the chemical quality of groundwater using a static array of periodically sampled stations.

These summaries are among the tools used by the Georgia Environmental Protection Division (EPD) to assess trends in the quality of the State's groundwater resources. EPD is the State organization with regulatory responsibility for maintaining and where possible, improving groundwater quality and availability. EPD has implemented a comprehensive statewide groundwater management policy of anti-degradation (EPD, 1991; 1998). Four components comprise EPD's current groundwater quality assessment program:

1. **The Georgia Groundwater Monitoring Network:** EPD's Watershed Protection Branch, Source Water Assessment Program, took over the Georgia Groundwater Monitoring Network from the Regulatory Support Program when that program disbanded in 2012. The Monitoring Network is designed to evaluate the ambient groundwater quality of eight aquifer systems present in the State of Georgia. The data collected from sampling of the Groundwater Monitoring Network form the basis for this report.
2. **Water Withdrawal Program (Watershed Protection Branch, Water Supply Section):** This program provides data on the quality of groundwater that the residents of Georgia are using.
3. **Groundwater sampling at environmental facilities** such as municipal solid waste landfills, Resource Conservation Recovery Act (RCRA) facilities, and sludge disposal facilities. The primary agencies responsible for monitoring these facilities are EPD's Land Protection and Watershed Protection Branches.

4. The Wellhead Protection Program (WHP), which is designed to protect areas surrounding municipal drinking water wells from contaminants. The United States Environmental Protection Agency (EPA) approved Georgia's WHP Plan on September 30, 1992. The WHP Plan became a part of the Georgia Safe Drinking Water Rules, effective July 1, 1993. The protection of public supply wells from contaminants is important not only for maintaining groundwater quality, but also for ensuring that public water supplies meet health standards.

Analyses of water samples collected for the Georgia Groundwater Monitoring Network during the period January 2017 through December 2017 and from previous years form the database for this summary. The Georgia Groundwater Monitoring Network is presently comprised of 125 stations, both wells and springs. Twenty-one of the stations are scheduled for quarterly sampling; the remainder are scheduled to be sampled yearly. Each sample receives laboratory analyses for chloride, sulfate, nitrate/nitrite, total phosphorus, 26 metals, and volatile organic compounds (VOCs). Samples from the mineral spring and main well at Indian Springs State Park (stations P12A and P23) also receive analysis for fluoride. Field measurements of pH, conductivity, and temperature are performed on the sample water from each station. Field dissolved oxygen measurements are made on sample water from wells.

During the January 2017 through December 2017 period, Groundwater Monitoring staff collected 188 samples from 116 wells and 9 springs. A review of the data from this period and comparison of these data with those for samples collected for preceding monitoring efforts indicated that groundwater quality at most of the 125 stations has remained good.

1.2 FACTORS AFFECTING CHEMICAL GROUNDWATER QUALITY

The chemical quality of groundwater is the result of complex physical, chemical, and biological processes. Among the more significant controls are the chemical quality of the water entering the groundwater flow system, the reactions of the infiltrating water with the soils and rocks that are encountered, and the effects of the well-and-pump system.

Most water enters the groundwater system in upland recharge areas and in areas of leakage from adjacent geologic units. Water seeps through interconnected pore spaces and fractures in the soils and rocks until discharged to a surface water body (e.g., stream, lake, or ocean). The initial water chemistry, the amount of recharge, and the attenuation capacity of soils have a strong influence on the quality of groundwater in recharge areas. Chemical interactions between the water and the aquifer host rocks have an increasing significance with longer residence times. As a result, groundwater from discharge areas tends to be more highly mineralized than groundwater in recharge areas.

The well-and-pump system can also have a strong influence on the quality of the well water. Well casings, through compositional breakdown, can contribute metals (e.g., iron from steel casings) and organic compounds (e.g., tetrahydrofurans from PVC pipe cement) to the water. Pumps can aerate the water being drawn up and discharged. An improperly constructed or failing well can offer a conduit that allows local pollutants to enter the groundwater flow system

1.3 HYDROGEOLOGIC PROVINCES OF GEORGIA

This report defines three hydrogeologic provinces by their general geologic and hydrologic characteristics (Figure 1-1). These provinces consist of:

1. The Coastal Plain Province of south Georgia;
2. The Piedmont/Blue Ridge Province, which includes all of north Georgia but the northwestern corner;
3. The combined Valley and Ridge and Appalachian Plateau Provinces of northwest Georgia.

1.3.1 Coastal Plain Province

Georgia's Coastal Plain Province generally comprises a wedge of loosely consolidated sediments that gently dip and thicken to the south and southeast. Groundwater in the Coastal Plain flows through interconnected pore space between grains and through solution-enlarged voids in rock.

The oldest outcropping sedimentary formations (Cretaceous) are exposed along the Fall Line (Figure 1-1), which is the northern limit of the Coastal Plain Province. Successively younger formations occur at the surface to the south and southeast.

The Coastal Plain of Georgia contains several confined and unconfined aquifers. Confined aquifers are those in which the readily permeable layer of aquifer medium is interposed between two layers of poorly permeable material (e.g. clay or shale). If the water pressure in such an aquifer exceeds atmospheric pressure, the aquifer is artesian. Water from precipitation and runoff enters the aquifers and aquifer systems in their updip outcrop areas, where permeable sediments hosting the aquifer are exposed. Water may also enter the aquifers downdip from the recharge areas through leakage from overlying or underlying aquifers. Most Coastal Plain aquifers are unconfined in their updip outcrop areas, but become confined in downdip areas to the south and southeast, where they are overlain by successively younger rock formations. Groundwater flow through confined Coastal Plain aquifers is generally to the south and southeast, in the direction of dip of the sedimentary layers.



Figure 1-1. The Hydrogeologic Provinces of Georgia

The sediments forming the major aquifer systems in the Coastal Plain range in age from Cretaceous to Holocene. Horizontal and vertical changes in the sediment layers that form these aquifer systems determine the thickness and extent of the aquifer systems. Several aquifer systems may be present in a single geographic area forming a vertical "stack".

The Cretaceous and Jacksonian aquifer systems (primarily sands) are a common source of drinking water within a 35-mile wide band that lies adjacent to and south of the Fall Line. However, the aquifer systems do extend downdip of the band. A well has been planned to test the Cretaceous aquifer along the Atlantic Coast for water supply development. Southwestern Georgia relies on three vertically stacked aquifer systems plus the upper part of the Cretaceous aquifer system for drinking water supplies: the Clayton, the Claiborne, and the Floridan aquifer systems. The Miocene/Surficial aquifer system (primarily sands) is the principal shallow aquifer system occupying much of the same broad area occupied by the Floridan aquifer system in central and eastern Georgia. The system is unconfined over most of its inland extent, but becomes partly confined both in the coastal area and in the Grady, Thomas, Brooks, and Lowndes County area of South Georgia.

1.3.2 Piedmont/Blue Ridge Province

Though the Piedmont and Blue Ridge Physiographic Provinces differ geologically and geomorphologically, the two physiographic provinces share common hydrogeological characteristics and thus can be treated as a single hydrogeologic province. A two-part aquifer system characterizes the Piedmont/Blue Ridge Province (Daniel and Harned, 1997). The upper part of the system is the regolith aquifer, composed of saprolite and overlying soils and alluvium. The regolith aquifer is unconfined, and the water resides primarily in intergranular pore spaces (primary porosity). The lower aquifer in the Piedmont/Blue Ridge aquifer system is the bedrock aquifer. This aquifer is developed in metamorphic and igneous bedrock (mostly Paleozoic and Precambrian in age); the water resides in fractures and, in the case of marbles, solution-enlarged voids (secondary porosity). In contrast to the regolith aquifer, no intergranular (primary) porosity exists in the bedrock aquifer. The bedrock aquifer is semi-confined with the overlying regolith aquifer media and the bedrock itself offering local confinement to the fractures and voids. The regolith aquifer also serves as the reservoir that recharges the bedrock aquifer.

1.3.3 Valley and Ridge Province

Faulted and folded consolidated Paleozoic sedimentary formations characterize the Valley and Ridge Province. The principal porosity present in aquifer media consists of fractures and solution-enlarged voids in the carbonate rocks; intergranular porosity may be important in some places. Locally, groundwater and surface-water systems closely interconnect. Dolostones and limestones of the Knox Group are the principal aquifers where they occur in fold axes at the centers of broad valleys. The greater hydraulic conductivities of the thick carbonate sections in this province permit higher yielding wells than in the Piedmont/Blue Ridge Province.

1.3.4 Appalachian Plateau Province

Rocks in this province consist of consolidated Paleozoic sediments inclusive of the Mississippian and Pennsylvanian. Faulting and folding are less intense than in the Valley and Ridge province, and sediments tend to be flatter lying and more continuous areally. As in the Valley and Ridge Province, secondary porosity is the most important type of porosity. The highly fractured Fort Payne Chert and the Knox Group are major water-bearing units in this province.

Only a small part of this province extends into Georgia, at the State's far northwest corner (Dade County and parts of Chattooga and Walker Counties). Due to its small extent in Georgia and its lack of monitoring stations for the current project, the Appalachian Plateau Province is combined with the Valley and Ridge Province for the purposes of this report.

1.4 REGIONAL GROUNDWATER PROBLEMS

Data from groundwater investigations in Georgia, including those from the Groundwater Monitoring Network, indicate that virtually all of Georgia has shallow groundwater sufficient for domestic supply. Iron, aluminum, and manganese are the only constituents that occur routinely in concentrations exceeding drinking water standards. These metals are mostly naturally occurring and do not pose a health risk. Iron and manganese can cause reddish or yellowish-brown to dark brown or black stains on objects and can give water a bitter metallic taste. Aluminum can cause water to appear cloudy.

In the karstic carbonate terranes of the combined Valley and Ridge/ Appalachian Plateau Province, interconnection between the surface water systems and the groundwater systems can be extensive enough such that waters supplying some wells and springs (e.g., Crawfish Spring and Cedartown Spring) have been deemed under direct surface influence, requiring surface water type treatment if used for public supplies.

In the Piedmont/Blue Ridge Province, water available to wells drilled into bedrock consisting of granitic intrusive rocks, granitic gneisses, or hornblende gneiss/ amphibolite assemblages occasionally may contain excessive naturally occurring uranium.

Aquifers in the outcrop areas of Cretaceous sediments south of the Fall Line typically yield acidic water that may require treatment. The acidity occurs naturally and results from the inability of the sandy aquifer sediments to neutralize acidic rainwater and from biologically influenced reactions between infiltrating water and soils. Groundwater from the Cretaceous along the coast is typically brackish.

Nitrate/nitrite concentrations in shallow groundwater from the farm belt in southern Georgia are usually within drinking water standards, but are somewhat higher than levels found in other areas of the State.

Three areas of naturally reduced groundwater quality occur in the Floridan aquifer system. The first is the karstic Dougherty Plain of southwestern Georgia. The second is the Gulf Trough area. The third is in the coastal area of east Georgia.

In the Dougherty Plain, as with the carbonate terranes of northwestern Georgia, surface waters and the contaminants they entrain can directly access the aquifer through sink holes.

The Gulf Trough is a linear geologic feature extending from southwestern DeCATur County through northern Effingham County and may represent a filled marine current channel (Huddleston, 1993). Floridan groundwater in and near the trough may be high in total dissolved solids and may contain elevated levels of sulfate, barium, radionuclides, and arsenic (Kellam and Gorday, 1990; Donahue et al., 2013).

In the Coastal area of east Georgia, the influx of water with high dissolved solids content can dramatically raise levels of sodium, calcium, magnesium, sulfate, and chloride. In the Brunswick part of the Coastal area, groundwater withdrawal from the upper permeable zone of the Floridan aquifer system results in the upwelling of groundwater with high dissolved solids content from the deeper parts of the aquifer system (Krause and Clarke, 2001). In the Savannah portion of the Coastal area, heavy pumping in and around Savannah and Hilton Head, South Carolina has caused a cone of depression which has induced seawater to enter the Floridan aquifer system in South Carolina and to flow down-gradient toward Savannah. The seawater has not yet reached Savannah and may not reach Savannah for many years. The seawater enters the aquifer system via breaches in the Miocene confining unit along the bottoms of waterways and sand-filled paleochannels offshore of the Beaufort/Hilton Head area of South Carolina in what is referred to as the Beaufort Arch; where the top of the Floridan aquifer system is closer to the ocean water (Foyle et al., 2001; Krause and Clarke, 2001).

CHAPTER 2 GEORGIA GROUNDWATER MONITORING NETWORK

2.1 MONITORING STATIONS

For the period January 2017 through December 2017, attempts were made to place sampling stations in the Coastal Plain Province's six major aquifer systems, in the Piedmont/Blue Ridge Province, and in the Valley and Ridge/ Appalachian Plateau Province (Table 2-1). Stations are restricted to wells or springs tapping a single aquifer or aquifer system. Attempts were made to have some monitoring stations located in the following critical settings:

1. areas of recharge;
2. areas of possible pollution or contamination related to hydrogeologic settings (e.g., granitic intrusions, the Dougherty Plain, and the Gulf Trough);
3. areas of significant groundwater use.

Most of the monitoring stations are municipal, industrial, and domestic wells that have well construction data.

2.2 USES AND LIMITATIONS

Regular sampling of wells and springs of the Groundwater Monitoring Network permits analysis of groundwater quality with respect to location (spatial trends) and time of sample collection (temporal trends). Spatial trends are useful for assessing the effects of the geologic framework of the aquifer and regional land-use activities on groundwater quality. Temporal trends permit an assessment of the effects of rainfall and drought periods on groundwater quality and quantity. Both trends are useful for the detection of non-point source pollution. Non-point source pollution arises from broad-scale phenomena such as acid rain deposition and application of agricultural chemicals on crop lands.

It should be noted that the data of the Groundwater Monitoring Network represent water quality in only limited areas of Georgia. Monitoring water quality at the 125 sites located throughout Georgia provides an indication of groundwater quality at the locality sampled and at the horizon corresponding to the open interval in the well or to the head of the spring at each station in the Monitoring Network. Caution should be exercised in drawing unqualified conclusions and applying any results reported in this study to groundwaters that are not being monitored.

Table 2-1. Georgia Groundwater Monitoring Network, Calendar Year 2017.

Aquifer or Aquifer System	Number of Stations Visited (Samples Taken)	Primary Stratigraphic Equivalents	Age of Aquifer Host Rocks
Cretaceous	21 stations (21 samples)	Ripley Formation, Cusseta Sand, Blufftown Formation, Eutaw Formation, Tuscaloosa Formation, Providence Sand, Steel Creek Formation, Gaillard Formation, Pio Nono Formation	Late Cretaceous
Clayton	3 stations (3 sample)	Clayton Formation	Paleocene
Claiborne	3 stations (3 samples)	Claiborne Group	Middle Eocene
Jacksonian	10 stations (10 samples)	Barnwell Group	Late Eocene
Floridan	35 stations (65 samples)	Ocala Group, Suwanee Limestone	Middle Eocene to Early Oligocene
Miocene/Surficial	7 stations (7 samples)	Hawthorne Group, Miccosukee Formation, Cypresshead Formation	Miocene to Recent
Piedmont/Blue Ridge	40 stations (70 samples)	Various igneous and metamorphic complexes	Precambrian and Paleozoic
Valley and Ridge/ Appalachian Plateau	6 stations (9 samples)	Shady Dolomite, Knox Group, Conasauga Group	Paleozoic, mainly Cambrian, Ordovician

Stations of the Groundwater Monitoring Network are intentionally located away from known point sources of pollution. The stations provide baseline data on ambient water quality in Georgia. EPD requires other forms of groundwater monitoring for activities that may result in point source pollution (e.g., landfills, hazardous waste facilities, and land application sites) through its environmental facilities permit programs.

Groundwater quality changes gradually and predictably in the areally extensive aquifer systems of the Coastal Plain Province. The Monitoring Network allows for some definition of the chemical processes occurring in large confined aquifers. Unconfined aquifers in northern Georgia and in the surface recharge areas of southern Georgia are of comparatively small extent and more open to interactions with land use activities. The wide spacing of most monitoring stations does not permit equal characterization of water-quality processes in these settings. The quality of water from monitoring stations drawing from unconfined aquifers represents only the general nature of groundwater in the vicinity of the stations. Groundwater in the recharge areas of the Coastal Plain aquifer systems is one of the future drinking-water resources for down-flow areas. Monitoring stations in these recharge areas, in effect, constitute an early warning system of potential future water quality problems in confined portions of the Coastal Plain aquifer systems.

2.3 ANALYSES AND DATA RETENTION

Analyses are available for 188 water samples collected from 125 stations (116 wells and 9 springs) during the period January 2017 through December 2017. In 1984, the first year of the Groundwater Monitoring Network, EPD staff sampled from 39 wells in the Piedmont/Blue Ridge and Coastal Plain Provinces. Between 1984 and 2004, the network had expanded to include 125 stations situated in all three hydrogeologic provinces, with most of the stations being in the Piedmont and Coastal Plain Province.

Groundwater from all monitoring stations is tested for chloride, sulfate, nitrate/nitrite, total phosphorus, a variety of metals, and volatile organic compounds (VOCs). Water from stations P12A and P23 also receive testing for fluoride. Testing for the VOCs was done using the Gas Chromatography / Mass Spectrometry (GC/MS) method (EPA method 524.2). Testing for anions chloride, fluoride and sulfate was done using the Ion Chromatography method (EPA method 300.0). Testing for nitrite / nitrate as total nitrogen was done using the Automated Colorimetry method (EPA method 353.2). Testing for phosphorus was done using the Semi-Automated Colorimetry method (EPA method 365.1). Appendix Table A-9 lists the EPA methods used to test for these analytes along with a reporting limit for each analyte. The results of the chemical tests are reported in this Circular. Before collecting a sample, EPD personnel also observe and record certain field measurements; pH, conductivity, dissolved oxygen, and temperature. This Circular also reports these measurements.

Testing for aluminum, beryllium, calcium, cobalt, iron, potassium, magnesium, manganese, sodium, titanium, and vanadium was undertaken using the inductively coupled plasma (ICP) method (EPA method 200.7 in Table A-9). This method works

well for most of the major metals listed above. This method was also used to test for arsenic, barium, cadmium, chromium, copper, nickel, lead, antimony, selenium, thallium, and zinc. The inductively coupled plasma mass spectrometry (ICPMS) method (EPA method 200.8 in Table A-9) was also used to test for the metals mentioned in the previous sentence as well as for molybdenum, silver, tin, and uranium. The ICPMS method generally gives better results for trace metals.

Pursuant to the Georgia Safe Drinking Water Act of 1977, EPD has established Maximum Contaminant Levels (MCLs) for certain analytes and other parameters, certain of which are included in analyses performed on Groundwater Monitoring samples (EPD, 2009). Primary MCLs pertain to analytes that can adversely affect human health if the maximum concentration for an analyte is exceeded for drinking water. Secondary MCLs pertain to parameters that may give drinking water objectionable, though not health-threatening, properties that may cause persons served by a public water system to cease using the water. Unpleasant taste and the ability to cause stains are examples of such properties. MCLs apply only to treated water offered for public consumption; nevertheless, they constitute useful guidelines for evaluating the quality of untreated (raw) water. Table A-10 in the Appendix lists the Primary and Secondary MCLs for Groundwater Monitoring Network analytes.

Most wells currently on the Monitoring Network have in-place pumps. Using such pumps to purge wells and collect samples reduces the potential for cross-contamination that would attend the use of portable pumps. Pumped wells may affect VOC concentrations of sample water. Two wells, the Miller Ball Park North East Well (PA9C) and the Springfield Egypt Road Test Well (MI17), are flowing, which dispenses altogether with pumps and lessens the effects of the pump-well system on sample water. The pump on the Murphy Garden Well (MI9A), a shallow bored well formerly used for garden watering, is now out of operation and a bailer is used for sampling.

Sampling procedures are adapted from techniques used by United States Geologic Survey (USGS) and EPA. For wells except PA9C, MI9A, and MI17, EPD personnel purge the wells (EPA recommends removing three to five times the volume of the water column in the well) before collecting a sample to reduce the influence of the well, pump, and plumbing system on water quality. A purge of 15 to 20 minutes is usually sufficient to allow readings of pH, conductivity, temperature, and dissolved oxygen to stabilize and to allow corrosion films on the plumbing to be flushed away.

The apparatus used for monitoring field measurements and collecting samples consists of a garden hose with two branches at its end and a container. One branch conveys water to a container; the other branch allows the water to flow freely. On the container branch, water enters the bottom of the container, flows past the probe of the instrument taking field measurements, and discharges over the top of the container. Such an apparatus minimizes the exposure of the sample water to atmosphere. Once the field measurements have stabilized, sample containers are then filled with water discharging from the end of the free-flowing branch. Sample waters do not pass through a filter before collection. As a rule, trends for field measurements with increasing purge time include a lowering of pH, conductivity and dissolved oxygen. For

shallower wells, the temperature tends to approach the mean atmospheric temperature for the area. For deeper wells geothermal heating may become apparent.

Once the sample bottles are filled, they are promptly placed on ice to preserve water quality. EPD personnel transport samples to the laboratory on or before the Friday of the week during which the samples were collected, well before holding time for the samples lapse. Field measurements and analytical results are provided in Table A-1 in the Appendix.

Files at EPD contain records of the field measurements and chemical analyses. Owners of wells or springs receive copies of the laboratory analysis sheets as well as cover letters and laboratory sheet summaries. The cover letters state whether or not any MCLs were exceeded. The Drinking Water Program's Compliance and Enforcement Unit receives notification of Primary MCL exceedances involving public water supplies.

Station numbering assigns each station a two-part alphanumeric designation, the first part consisting of an alphabetic abbreviation for the aquifer being sampled and the second part consisting of a serial number, sometimes with an alphabetic suffix, the two parts separated by a dash. Some wells were also added from previous sampling and monitoring programs that were previously labeled with a County alphabetic abbreviation instead of an aquifer. In this case the previous identification number was retained for cross reference with previous samples. In order for the groundwater database to be compatible with the Georgia Environmental Monitoring and Assessment System (GOMAS), a Watershed Protection Branch-wide water database, the stations were also assigned a three-part alphanumeric designation; the first part being an alphabetic abbreviation "GW" (for groundwater), the second part numeric representing the local river basin and the third part a serial number.

CHAPTER 3 CHEMICAL GROUNDWATER QUALITY IN GEORGIA

3.1 OVERVIEW

Georgia's major aquifer systems are grouped into three hydrogeologic provinces for the purposes of this report: the Coastal Plain Province, the Piedmont/Blue Ridge Province, and the Valley and Ridge/Appalachian Plateau Province.

The Coastal Plain Province comprises six major aquifer systems that are restricted to specific regions and depths within the Province (Figure 3-1). These major aquifer systems commonly incorporate smaller aquifers that can be locally confined. Groundwater Monitoring Network wells in the Coastal Plain aquifer systems are generally located in three settings:

1. Recharge (or outcrop) areas that are located in regions that are geologically updip and generally north of confined portions of these aquifer systems;
2. Updip, confined areas that are located in regions that are proximal to the recharge areas, yet are confined by overlying geologic formations. These are generally south to southeast from the recharge areas;
3. Downdip, confined areas, located to the south or southeast in the deeper, confined portions of the aquifer systems, distal to the recharge areas.

The Piedmont/Blue Ridge Province comprises two regional aquifers, the regolith aquifer and the bedrock aquifer (Daniel and Harned, 1997). The regolith aquifer is composed of saprolite – bedrock that has undergone intense chemical weathering – plus soil and alluvium. The regolith aquifer, highly porous and appreciably permeable, serves as the reservoir that recharges the bedrock. The igneous and metamorphic bedrock exhibits low porosity – nearly all of the porosity is secondary and consists of discontinuous fractures, but can be very permeable as fractures can locally transmit water rapidly. Despite the regional scale of these two aquifers, flow systems are small-scale and localized, in contrast to those of the Coastal Plain.

Paleozoic sedimentary formations characterize the combined Valley and Ridge/Appalachian Plateau Province, although unlike in the Coastal Plain, these sedimentary formations are consolidated and have been subjected to faulting and folding. Also, in contrast to the Coastal Plain Province, the faulting and folding has resulted in the creation of numerous, small-scale localized flow systems in the Valley and Ridge/Appalachian Plateau Province. The major water-bearing units in the province are carbonate rocks. Faulting and fracturing of the carbonates have led to the widespread development of karst features, which significantly enhance porosity and permeability and exert a strong influence on local flow patterns.

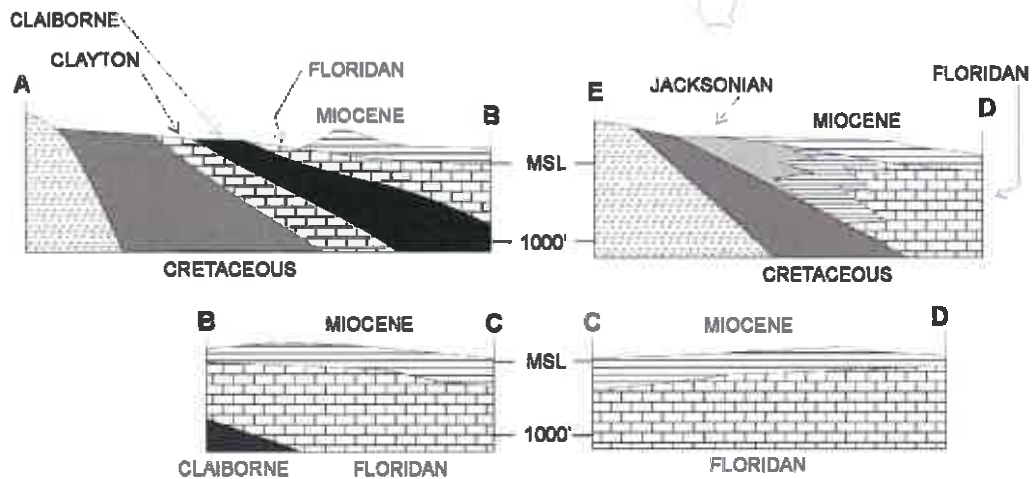
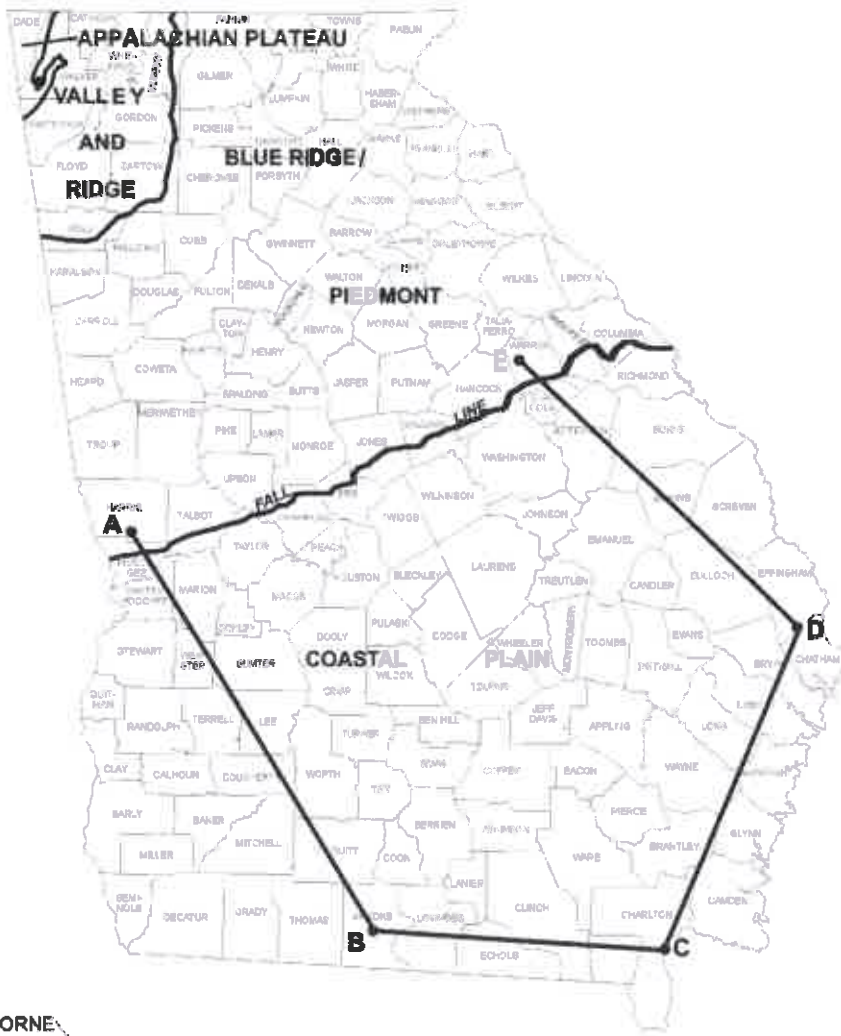


Figure 3-1. The Major Aquifers and Aquifer Systems of the Coastal Plain Province (after Davis, 1990).

3.2 CRETACEOUS AQUIFER SYSTEM

3.2.1 Aquifer System Description

The Cretaceous aquifer system is a complexly interconnected group of aquifer subsystems developed in the late Cretaceous sands of the Coastal Plain Province. These sands crop out in an extensive recharge area immediately south of the Fall Line in west and central Georgia (Fig. 3-2). In east Georgia, overlying Tertiary sediments restrict Cretaceous outcrops to valley bottoms. Five distinct subsystems of the Cretaceous aquifer system, including the Providence aquifer, are recognized west of the Ocmulgee River (Pollard and Vorhis, 1980). These merge into three subsystems to the east (Clarke et al, 1985; Huddleston and Summerour, 1996). The aquifer thickens southward from the Fall line, where the clays and sands pinch out against crystalline Piedmont rocks, to a column approximately 2,000 feet thick at the southern limits of the main aquifer use area (limit of utilization, Figure 3-2). Below the limit of utilization some Cretaceous wells have reached depths of 4,000 feet.

The Providence aquifer, a prominent subsystem of the Cretaceous aquifer system in the western Coastal Plain, is developed in sands and coquinoid limestones at the top of the Cretaceous column. The permeable Providence Formation-Clayton Formation interval forms a single aquifer in the updip areas (Long, 1989) and to the east of the Flint River (Clarke et al., 1983). East of the Ocmulgee River, this joint permeable interval is termed the Dublin aquifer (Clarke et al., 1985). This report treats the Providence aquifer as a part of the Cretaceous aquifer system.

EPD used 21 wells to monitor the Cretaceous aquifer system. Reported depths ranged from 128 feet (K7) to 1025 feet (PD6). All except well MAC1, MAR1 and K6 are local government owned public supply wells. Well MAC1 provides water for a park, well MAR1 produces process water for a sand mining operation and well K6 produces process water for a kaolin mill. All wells are sampled yearly.

3.2.2 Field Parameters

The pHs of sample waters from all 21 wells ranged from 4.25 (K12) to 8.14 (PD3), with a median of 4.75. As a rule, pHs of waters from the deeper wells are basic, while those from shallower wells are acidic. Well PD3 and TAL1 seem to be the exceptions. Their sampling pH of 8.14 (PD3) and 7.92 (TAL1) would be expected for a well about twice their reported depth of 456 feet (PD3) and 300 feet (TAL1). Conductivities are available for all 21 wells and ranged from 16 uS/cm (BUR2) to 360 uS/cm (PD3), with a median of 53 uS/cm. As a rule, the deeper wells gave water with the higher conductivities. The temperatures measured should be viewed as approximations of the temperature of the water in the aquifer. Temperatures over all 21 well samples ranged from 17.97 degrees C (K7) to 28.39 degrees C (K20). Comparing well depths with sample water temperatures shows that the deeper wells generally tend to yield water with higher temperatures. The

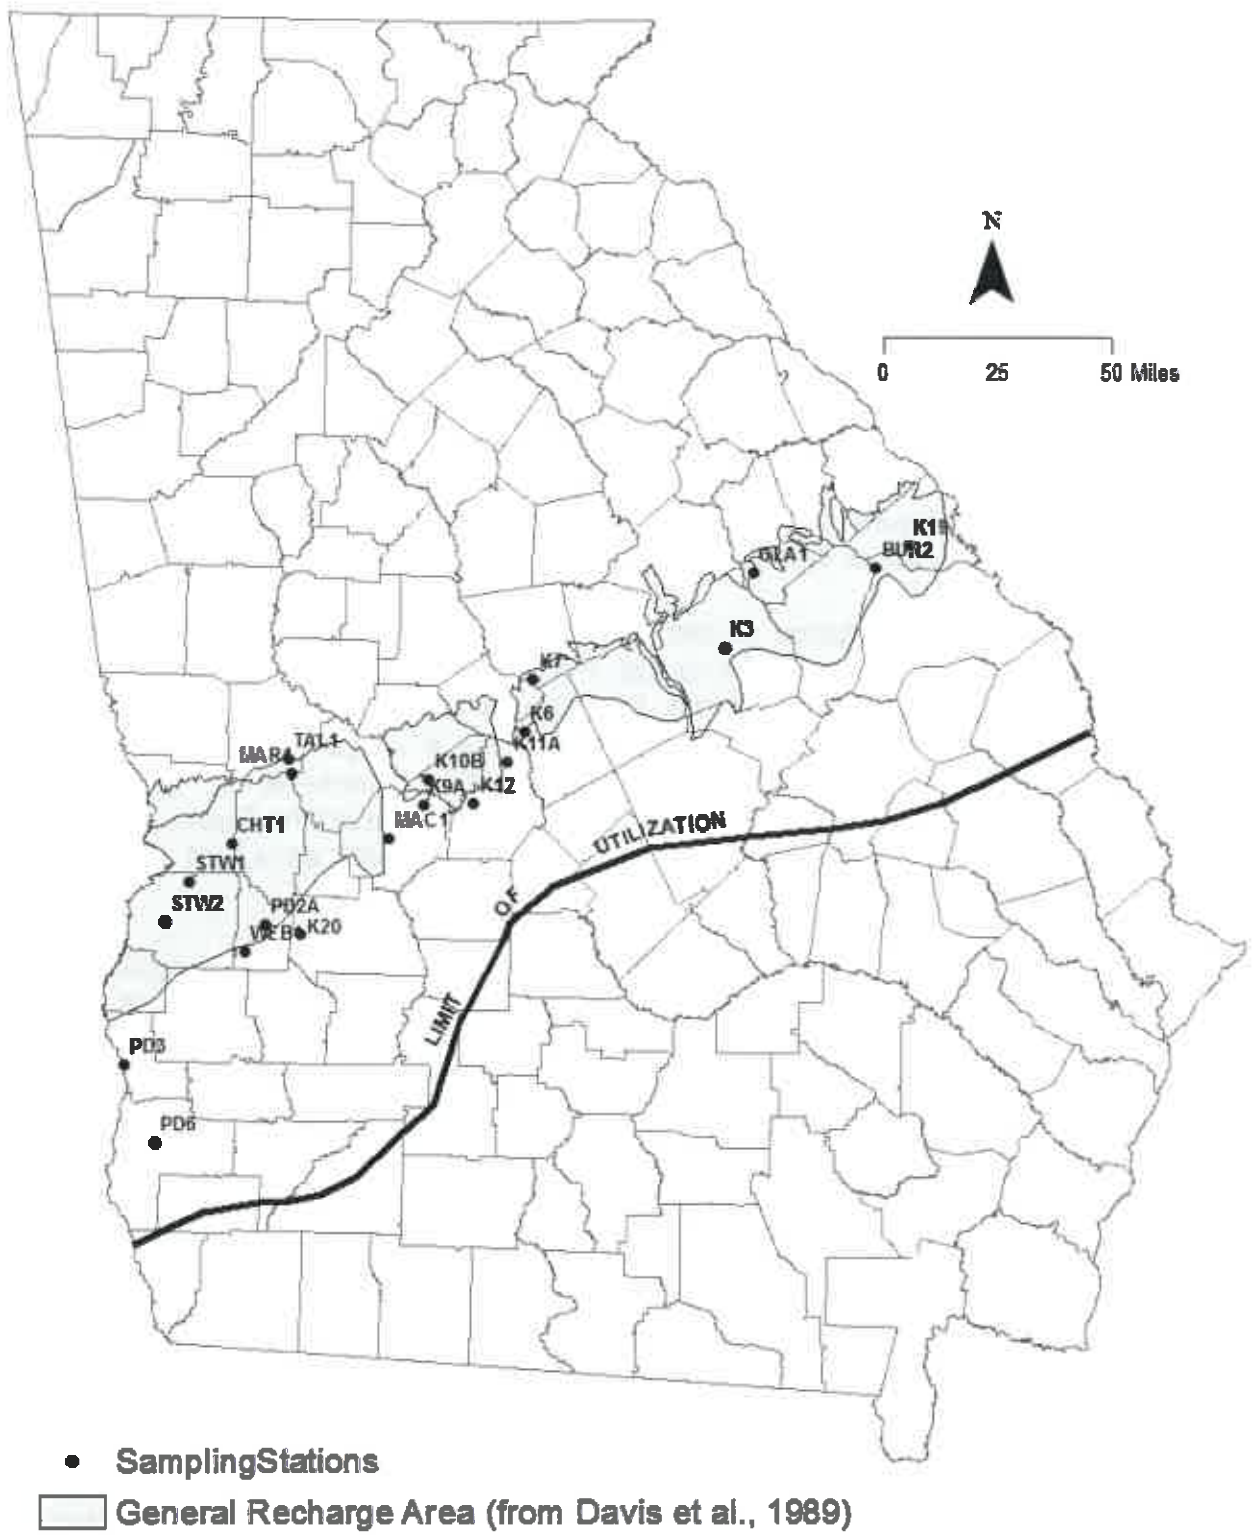


Figure 3-2. Locations of Stations Monitoring the Cretaceous Aquifer System.

water temperature can also depend somewhat on the time of year measured, since sample water must traverse a zone influenced by surface temperature on its way from the aquifer to the measurement point. Dissolved oxygen measurements are available for 19 of the 21 wells. Concentrations ranged from 0.11 mg/L (TAL1) up to 9.96 mg/L (K10B). Generally, the dissolved oxygen content of groundwater decreases with depth. Dissolved oxygen measurements can suffer from various interferences and processes that can expose the groundwater to air. An inadequately purged well may deliver water that has been in contact with air in the well bore. Pumping a well's water level down near the pump intake can entrain air into the pumped water. Also, pumping the water level in the well below a recharging horizon allows water to "cascade" or fall freely down the well bore and splash, thereby becoming aerated.

3.2.3 Major Anions, Non-Metals, and Volatile Organic Compounds

Testing for chloride, sulfate, combined nitrate/nitrite, total phosphorus, and volatile organic compounds (VOCs) was done for samples from all 21 wells. Other than sample PD3, which had detectable chloride at a level of 10 mg/L, none of the other 21 samples contained detectable chloride or VOCs. Sulfate was detected in samples from eight wells, with all concentrations at or below 37 mg/L (TAL1). Nitrate/nitrite was detected in 11 samples and ranged up to 2.20 mg/L (GLA1). Samples from ten wells contained detectable phosphorus, with concentrations ranging up to 1.1 mg/L (MAC1).

3.2.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP)

All 21 samples contained detectable sodium, which ranged from 1,100 ug/L (K9A) to 81,000 ug/L (PD3). The current high reporting limit for analyzing potassium accounts for the lack of potassium detections. Three wells gave samples with detectable aluminum ranging up to 1,200 ug/L (GLA1). Thirteen wells yielded samples containing detectable calcium, and 13 wells gave samples containing detectable iron. Calcium levels ranged from undetected to 64,000 ug/L (WEB1). Iron levels ranged up to 1,900 ug/L (CHT1), with samples from five wells exceeding the Secondary MCL of 300 ug/L. Eight samples contained detectable magnesium, with a maximum value of 4,100 ug/L (PD6). Eight wells gave samples with detectable manganese. None exceeded the Secondary MCL of 50 ug/L. Beryllium, cobalt, potassium, vanadium, and titanium remained undetected.

3.2.5 Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)

ICPMS analysis found detectable levels only of chromium, copper, zinc, barium and lead. Barium was detected in 20 of 21 samples with a maximum concentration of 76 ug/L (CHT1). Copper was detected in samples from five wells with the maximum level at 25 ug/L (K12); zinc was detected in samples from seven wells, with the maximum level at 34 ug/L (K3); lead was detected in samples from four wells, with the maximum level at 7.8 ug/L (K12). The copper and lead levels fell below their respective action levels of 1,300 ug/L and 15 ug/L and zinc below its

secondary MCL of 5,000 ug/L. The highest concentrations for these three metals tend to occur in samples with the lowest pHs. These three metals commonly leach into sample water from plumbing and are not necessarily present naturally. Chromium was detected at a concentration of 31.0 ug/L from well WEB1.

3.3 CLAYTON AQUIFER

3.3.1 Aquifer System Description

The Clayton aquifer system of southwestern Georgia is developed mainly in the middle limestone unit of the Paleocene Clayton Formation. Limestones and calcareous sands of the Clayton aquifer system crop out in a narrow belt extending from northeastern Clay County to southwestern Schley County (Figure 3-3). Aquifer thickness varies, ranging from about 50 feet in the outcrop area to 265 feet in southeastern Mitchell County (Clarke et al., 1984). Both the Flint River to the east and the Chattahoochee River, to the west are the areas of discharge for the aquifer in its updip extent. Leakage from the underlying Providence aquifer system and from overlying permeable units in the Wilcox Formation confining zone provides significant recharge in downdip areas (Clarke et al., 1984). As mentioned previously, permeable portions of the Clayton and Providence Formations merge to form a single aquifer in the updip area and east of the Ocmulgee River. East of that river these combined permeable zones are called the Dublin aquifer (Clarke et al., 1985).

3.3.2 Field Parameters

EPD sampled three wells annually to monitor the Clayton aquifer system. Wells SUM1 and SUM2 are public supply wells and well CT8 is a private well. These wells vary in depth from 80 feet (CT8) to 230 feet (SUM2). The sample waters had a pH range of 4.08 (SUM2) to 4.43 (CT8), an electrical conductivity range of 42 uS/cm (CT8) to 221 uS/cm (SUM2), a temperature range of 18.46 degrees C (CT8) to 19.80 degrees C (SUM2) and a dissolved oxygen range of 7.61 mg/L (SUM2) to 9.07 mg/L (CT8).

3.3.3 Major Anions, Non-Metals, and Volatile Organic Compounds

Testing for chloride, sulfate, combined nitrate/nitrite, total phosphorus, and volatile organic compounds (VOCs) was done for samples from all three wells. A volatile organic compound chloroform was detected in a sample from well SUM2 at a concentration of 0.53 ug/L. One sample contained detectable chloride at a concentration of 11 mg/L (SUM1). Sulfate was detected in one sample with a concentration of 80 mg/L (SUM2). Nitrate/nitrite was detected in all three samples and ranged up to 2.6 mg/L (SUM1). No Samples contained detectable phosphorus.

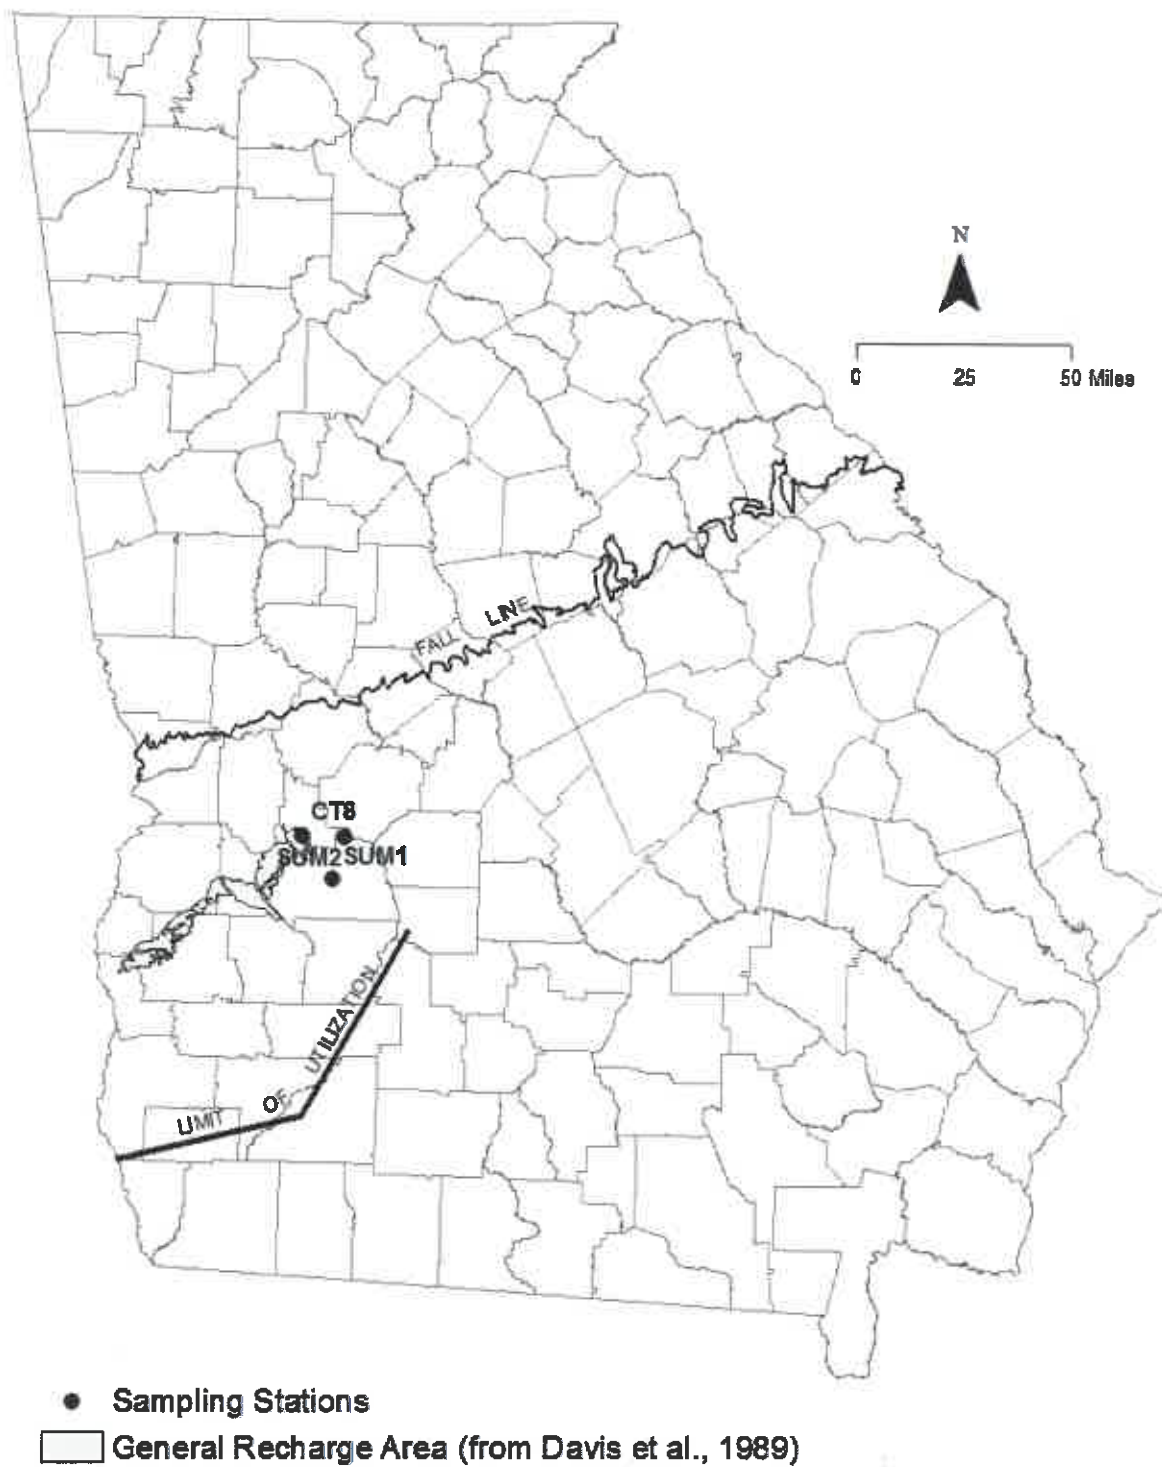


Figure 3-3. Location of the Stations Monitoring the Clayton Aquifer.

3.3.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP)

All three samples contained detectable sodium, which ranged from 2,600 ug/L (SUM2) to 12,000 ug/L (SUM1). The current high reporting limit for analyzing potassium accounts for the lack of potassium detections. Two wells gave samples with detectable aluminum ranging up to 1,100 ug/L (SUM2). One well yielded a sample containing detectable calcium and two wells gave samples containing detectable iron. Calcium levels ranged from undetected to 18,000 ug/L (SUM2). Iron levels ranged up to 1,600 ug/L (SUM2). One sample contained detectable magnesium at a value of 9,000 ug/L (SUM2). All three wells gave samples with detectable manganese with one well (SUM2) exceeding the Secondary MCL of 50 ug/L. Beryllium, cobalt, potassium, vanadium, and titanium remained undetected.

3.3.5 Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)

ICPMS analysis found detectable levels only of nickel, barium, copper, zinc, and lead. Nickel was detected in one sample from one well at a concentration of 11 ug/L (SUM2). Barium was detected in all three samples with a maximum concentration of 100 ug/L (SUM2). Copper was detected in all three samples with the maximum level at 38 ug/L (SUM1); zinc was detected in all three samples, with the maximum level at 66 ug/L (SUM2); and lead was detected in samples from two wells, with the maximum level at 6.8 ug/L (SUM2). The copper and lead levels of all three wells fell below their respective action levels of 1,300 ug/L and 15 ug/L.

3.4 CLAIBORNE AQUIFER

3.4.1 Aquifer Description

The Claiborne aquifer is developed primarily in the sandy units in the middle and lower portion of the Middle Eocene Claiborne Group of southwestern Georgia. Claiborne Group sands crop out in a belt extending from northern Early County through western Dooly County. Recharge to the aquifer occurs both as direct infiltration of precipitation in the recharge area and as leakage from the overlying Floridan aquifer system (Hicks et al., 1981; Gorday et al., 1997). The discharge boundaries for the updip portion of the aquifer are the Ocmulgee River to the east and the Chattahoochee River to the west. The aquifer generally thickens to the southeast and is more than 350 feet thick near its downdip limit of utilization (Figure 3-4) (Tuohy, 1984).

The clay-rich upper unit of the Claiborne Group, the Lisbon Formation, acts as a confining layer and separates the Claiborne aquifer from the overlying Floridan aquifer system (McFadden and Perriello, 1983; Long, 1989; Huddlestun and Summerour, 1996). The lower, water-bearing parts of the group had been correlated with the Tallahatta Formation (e.g., McFadden and Perriello, 1983; Long, 1989; Clarke et al., 1996) or more recently, have been divided into two formations, the upper one termed the Still Branch Sand and the lower one correlated to the

Congaree Formation (Huddlestone and Summerour, 1996). East of the Ocmulgee River, permeable Congaree-equivalent sands are included in the Gordon aquifer (Brooks et al., 1985).

Three stations, all in or near the recharge area, were available to monitor the Claiborne aquifer. Wells CL2 and CL4A are municipal public supply wells, and well CL8 supplies water for drinking and other purposes for a State forestry nursery. Well CL2 is 315 feet deep, CL4A is 230 feet deep, and CL8 is not known precisely, but is about 90 feet deep.

3.4.2 Field Parameters

The pH of sample water from two wells were mildly acidic (CL4A at 6.16 and CL8 6.07), while the other one was basic (CL2 at 7.44). Conductivities registered at 85 uS/cm (CL8), 150 uS/cm (CL4A), and 205 uS/cm (CL2); and temperatures registered at 18.59 degrees C (CL2), 19.93 degrees C (CL4A), and 21.11 degrees C (CL8). Dissolved oxygen contents measured at 4.38 mg/L (CL2) and 5.61 mg/L (CL8). Since well CL4A exposes water to air, there was no measurement for dissolved oxygen for the water at this well.

3.4.3 Major Anions, Non-Metals, and Volatile Organic Compounds

Well CL2 was the only station to give a sample with detectable nitrate/nitrite (0.49 mg/L as nitrogen). A sample from well CL4A contained detectable sulfate at 12 mg/L. Samples from two wells contained detectable phosphorus (CL4A at 0.37 mg/L and CL8 at 0.53 mg/L). None of the samples contained detectable chloride or VOCs.

3.4.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP)

Calcium and sodium were detected in samples from all three wells. The maximum and minimum calcium concentrations were 40,000 ug/L (CL2) and 11,000 ug/L (CL8). The maximum and minimum sodium concentrations were 2,600 ug/L (CL2) and 1,800 ug/L (CL4A and CL8). Detectable magnesium occurred only in the samples from well CL8 (1,200 ug/L) and CL4A (3,200 ug/L). Wells CL4A and CL8 gave samples with detectable iron at 2,300 ug/L and 560 ug/L respectively and manganese at 60 ug/L and 53 ug/L respectively. Both samples exceeded the iron and manganese Secondary MCLs of 300 ug/L and 50 ug/L respectively.

3.4.5 Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)

ICPMS analyses found barium in all three samples. The maximum and minimum barium concentrations were 40 ug/L (CL8) and 11 ug/L (CL4A).

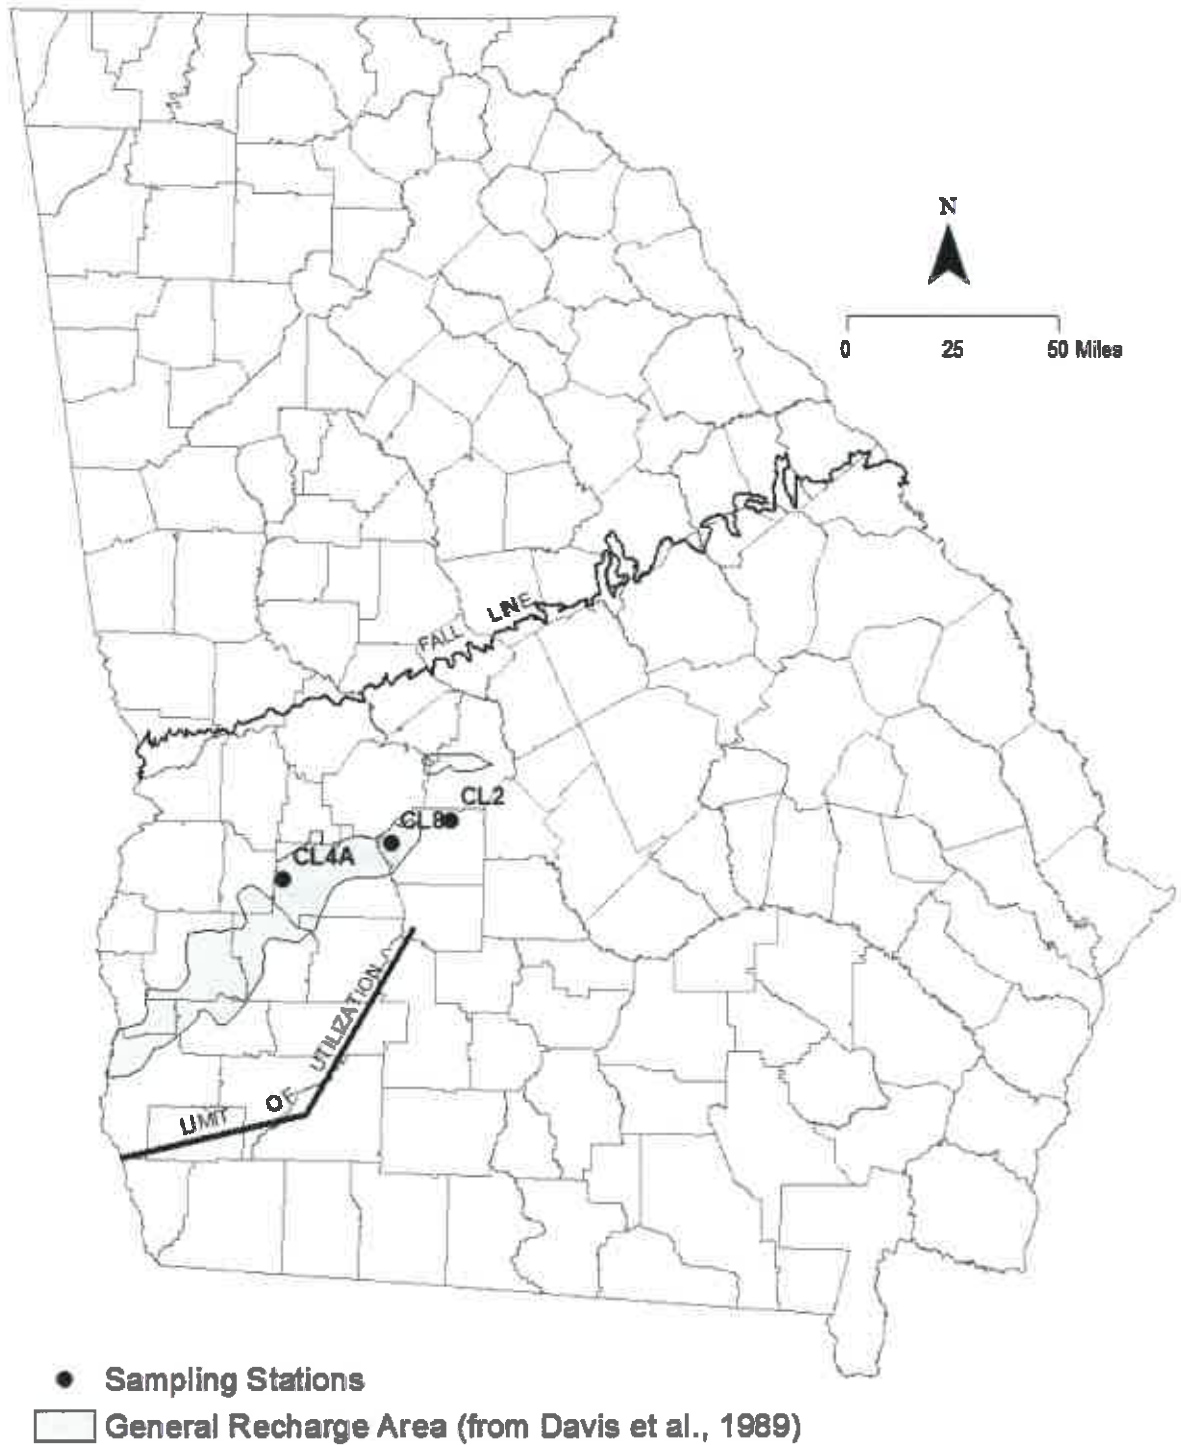


Figure 3-4. Locations of Stations Monitoring the Claiborne Aquifer.

3.5 JACKSONIAN AQUIFER

3.5.1 Aquifer Description

The Jacksonian aquifer system (Vincent, 1982) of central and east-central Georgia is developed primarily in sands of the Eocene Barnwell Group, though isolated limestone bodies are locally important. Barnwell Group outcrops extend from Macon and Crawford Counties (Hetrick, 1990) eastward to Burke and Richmond Counties (Hetrick, 1992). Figure 3-5 shows the extent and most significant Jacksonian recharge areas. Aquifer sands form a northern clastic facies of the Barnwell Group; the sands grade southward into less permeable silts and clays of a transition facies (Vincent, 1982). The water-bearing sands are relatively thin, ranging from 10 to 50 feet in thickness. Limestones equivalent to the Barnwell Group form a southern carbonate facies and are included in the Floridan aquifer system. The Savannah River and the Flint River are the eastern and western discharge boundaries for the updip parts of the Jacksonian aquifer system. The Jacksonian aquifer system is equivalent to the Upper Three Runs aquifer, as discussed by Summerour et al. (1994), page 2, and Williams (2007), "General Hydrogeology" table.

Ten wells were available to monitor the Jacksonian aquifer system. Wells J1B, J8A, J9 and J10 are domestic wells, while all the other wells are public supply wells. All are drilled wells, and each is scheduled for annual sampling.

3.5.2 Field Parameters

The pHs for all the wells were near neutral. The pHs range from 6.65 (J1B) to 7.82 (J9). Conductivities ranged from 278 uS/cm (J1B) to 349 uS/cm (J5). Temperatures ranged from 18.13 degrees C for well J10 to 20.54 degrees C for well J5, with water from the deeper wells registering higher temperatures. Dissolved oxygen concentrations ranged from 0.11 mg/L for well J6 to 8.41 mg/L for well J10 and are usually lowest in the deeper wells.

3.5.3 Major Anions, Non-Metals, and Volatile Organic Compounds

Sample waters from wells J5 and J6 contained detectable sulfate of 12 mg/L and 13 mg/L respectively. Nitrate/nitrite was detected in seven of the ten samples ranging from undetected to 2.4 mg/L as nitrogen (J1B), and all measurements were below the Primary MCL of 10 mg/L as nitrogen. Phosphorus was detected in water from nine of the ten wells and ranged from undetected to 0.16 mg/L (J10). No sample waters contained detectable chloride. The sample water from well J4 had detectable trihalomethanes (disinfectant by-products possibly from leaky check valve) in the following concentrations: chlorodibromomethane 0.67 mg/L.

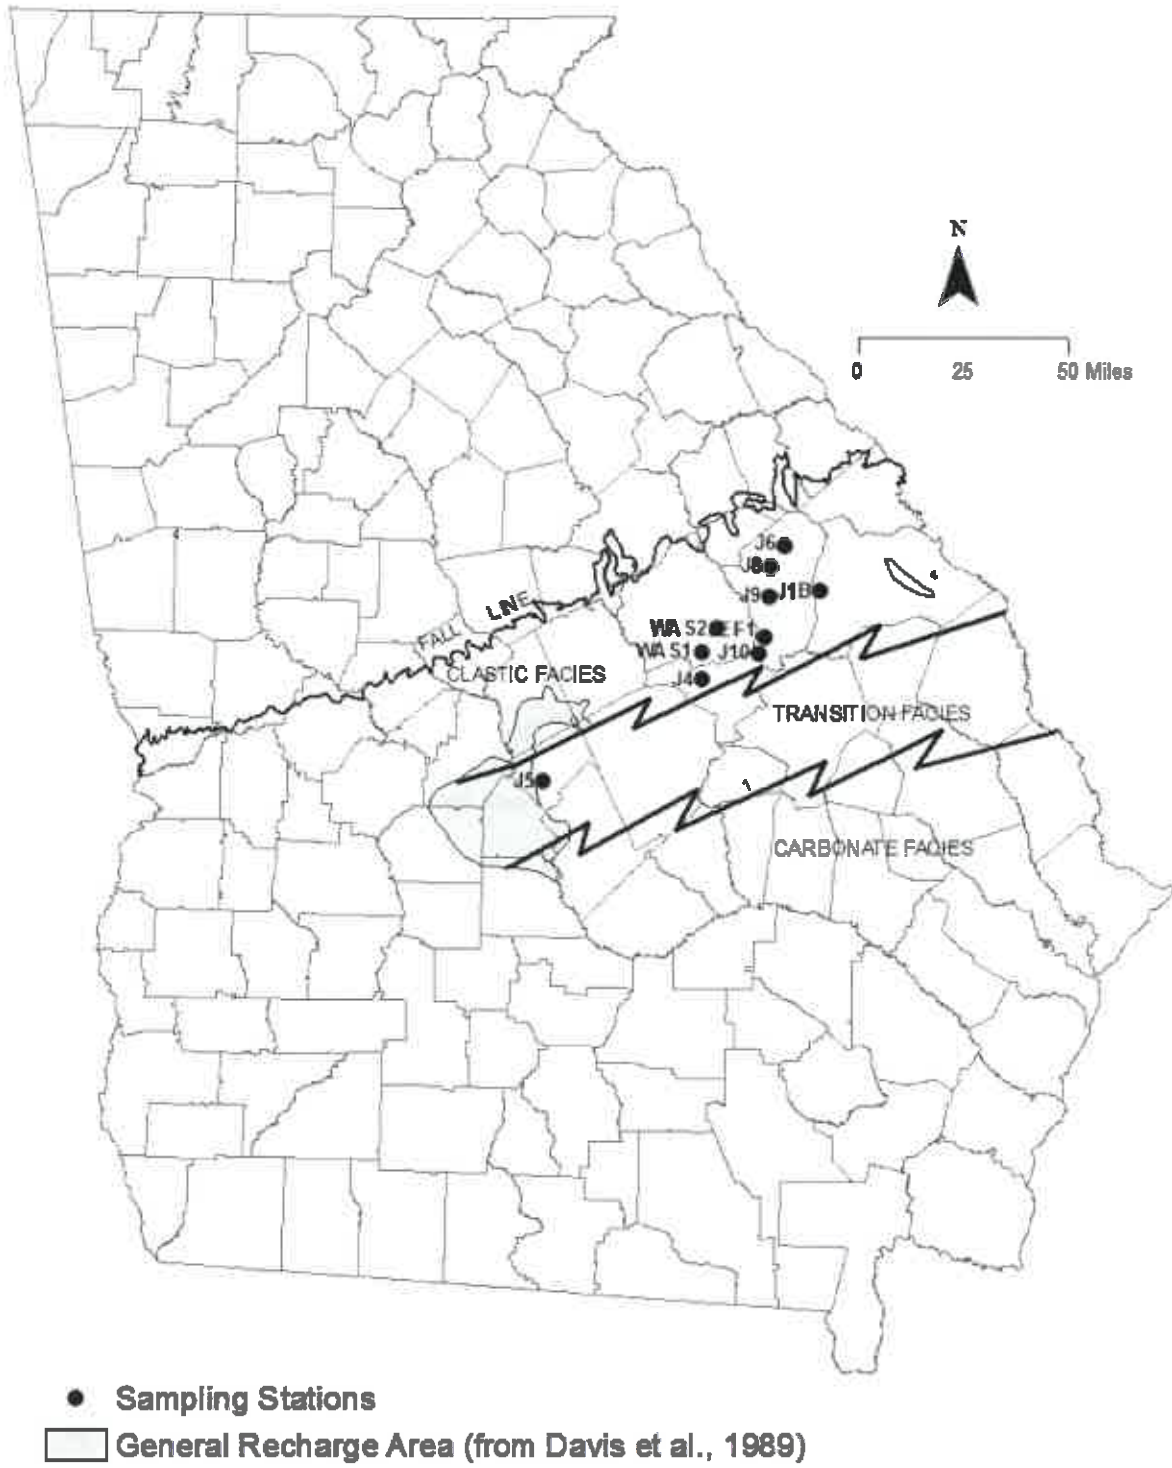


Figure 3-5. Locations of Stations Monitoring the Jacksonian Aquifer.

3.5.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP)

All ten wells gave waters with detectable calcium from 35,000 ug/L (J9) to 70,000 ug/L (J5). Magnesium was detected in seven of the ten wells and ranged from undetected in to 2,700 ug/L (J5). Detectable sodium occurred in each well sample and ranged from 1,600 ug/L (J9) to 4,600 ug/L (J1B). Iron was detected in three of the ten wells and ranged from undetected to 250 ug/L (J1B). Well J5, J8A and JEF1 gave a sample containing 77 ug/L, 23 ug/L and 74 ug/L manganese respectively. The sample from well J5 and JEF1 exceeded the manganese Secondary MCL of 50 ug/L. According to Kellam and Gorday (1990), the high calcium / magnesium ratios for these wells signifies that they derive most of their recharge from local surface water.

3.5.5 Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)

All ten wells yielded waters containing detectable barium, with a range from 2.1 ug/L (JEF1) to 95 ug/L (WAS1). Copper was detected in well J8A at 6.3 ug/L; zinc was detected in three of the ten samples, with the maximum level at 19 ug/L (WAS2). The copper levels fell below their action level of 1,300 ug/L. Selenium was detected in well WAS1 at 5.8 ug/L. Analysis found no other trace metals.

3.6 FLORIDAN AQUIFER SYSTEM

3.6.1 Aquifer System Characteristics

The Floridan aquifer system is developed predominantly in Eocene and Oligocene limestones and dolostones that underlie most of the Coastal Plain Province (Figure 3-6). The aquifer is a major source of groundwater for much of its outcrop area and throughout its downdip extent to the south and east.

The upper water-bearing units of the Floridan are the Eocene Ocala Group and the Oligocene Suwanee Limestone (Crews and Huddlestun, 1984). These limestones and dolostones crop out in the Dougherty Plain (a karstic area in southwestern Georgia) and in adjacent areas along strike to the northeast. In parts of Camden and Wayne Counties, the Oligocene unit is absent and the upper portions of the Floridan are restricted to units of Eocene age (Clarke et al., 1990). The lower parts of the Floridan consist mainly of dolomitic limestone of middle and early Eocene age and pelletal, vuggy, dolomitic limestone of Paleocene age, but extend into the late Cretaceous in Glynn County. The lower portions of the Floridan are hydrologically connected with the upper parts but are deeply buried and not widely used except for some municipal and industrial wells in the Savannah area. From its updip limit, defined by clays of the Barnwell Group, the aquifer system thickens to well over 700 feet in coastal Georgia.

A dense limestone facies occupying the Gulf Trough locally limits groundwater quality and availability (Kellam and Gorday, 1990; Applied Coastal Research Laboratory, 2001). The Gulf Trough may be a filled marine-current channel extending across Georgia from southwestern Decatur County through northern Effingham County. The trough, active beginning in the early Eocene, had ceased operating and filled with sediment in the Miocene.

A groundwater divide separates a smaller southwestward flow regime in the Floridan aquifer system in the Dougherty Plain in southwestern Georgia from the larger southeastward flow regime characteristic for the aquifer system under the remaining part of Georgia's Coastal Plain. Rainfall infiltration in outcrop areas and downward leakage from extensive surficial residuum recharge the Dougherty Plain flow system (Hayes et al., 1983). The main body of the Floridan aquifer system, lying to the east, is recharged by leakage from the Jacksonian aquifer and by rainfall infiltration in outcrop areas and in areas where overlying strata are thin. Significant recharge also occurs in the area of Brooks, Echols, Lowndes, Cook and Lanier counties where the Withlacoochee River and numerous sinkholes breach the upper confining units (Krause, 1979).

Monitoring water quality in the Floridan aquifer system was done by the use of 34 wells and one spring, with 25 scheduled for sampling on a yearly basis and 10 on a quarterly basis. The total number of samples collected was 65. All 34 wells are drilled wells. Thirty wells are local-government-owned public supply wells. One well supplies industrial process water, one well is a former USGS test well, one a private residence well and the remaining well supplies water for a coastal marina. Depths range from 174 feet (PA25 municipal well) to 1,211 feet (PA9C test well). The one remaining site is Radium Spring in Albany.

3.6.2 Field Parameters

Measurements of pH are available for all samples from all 35 locations and ranged from 7.07 (PA25) to 8.55 (PA59). The median pH is 7.62 and the mean is 7.66. Conductivities are also available for all the samples from all sites and ranged from 161 uS/cm (PA41A) to 3,230 uS/cm (PA9C) with a median of 313 uS/cm and a mean of 369 uS/cm. Temperatures are available for all sampling events and ranged from 20.20 degrees C for well PA59 to 26.02 degrees C for well THO2 with a median of 22.67 degrees C and a mean of 22.68 degrees C. The high temperatures reflect the geothermal effect of the deeper wells. Fifty-seven dissolved oxygen measurements are available from 30 wells. The available measurements range from 0.14 mg/L (PA16) to 9.12 mg/L (PA60) with a median of 1.69 mg/L and a mean of 2.54 mg/L. No measurements were taken at well PA4, PA9C, PA14A, PA59 and GLY3 because the raw water outlet will not permit the attachment of the usual sampling apparatus and exposes sample water to air.

3.6.3 Major Anions, Non-Metals, and Volatile Organic Compounds

Ten Floridan wells yielded 16 samples containing detectable chloride. Chloride concentrations ranged from undetected to 750 mg/L (PA9C). The measurement for well PA9C is more than 18 times the next highest concentration of 41 mg/L for well PA4. Well PA9C derives water from the lower part of the Floridan aquifer. Twenty-eight samples from 16 wells gave samples containing detectable sulfate. Levels ranged from undetected to 260 mg/L (PA9C). Twenty-one water samples from 11 wells and one spring contained detectable nitrate/nitrite. Concentrations ranged from undetected to 2.1 mg/L as nitrogen (PA59). There is a general tendency for shallower wells to give samples with higher levels of nitrate/nitrite. Nitrate/nitrite levels in the samples from each quarterly sampled well tend, as a rule, to be similar to one another. Phosphorus was detected in 39 samples from 27 wells and one spring. Phosphorus levels ranged up to 0.07 mg/L (PA20) as total phosphorus. Volatile organic compounds (VOCs), consisting entirely of trihalomethane compounds, were detected in one sample from one well in the following concentration; chloroform 28 ug/L (PA32). These compounds typically arise as byproducts from disinfection and their presence can indicate the reflux of treated water back down a well or result from sterilizing well plumbing following maintenance. The occasional nature of trihalomethane detections suggests a maintenance related origin. Radium Spring also yielded a water sample with a VOC detection. These VOCs were trichloroethylene and cis-1,2-dichloroethylene which are found in degreasers commonly used in factories and dry cleaners. Springs are subject to surface contaminations more so than deeper wells.

3.6.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP)

ICP analyses found detectable levels of potassium, manganese, iron, calcium, magnesium, aluminum, and sodium. Detectable potassium occurred in only two samples from two wells (PA4 and PA9C). Failure to find detectable potassium in other samples results from the insensitivity of the testing procedure, as indicated by the high reporting limit (5,000 ug/L) for the metal. Detectable manganese occurred in 19 samples from ten wells. The maximum concentration of 110 ug/L occurred in one sample from well PA34A. All four samples from quarterly-sampled well PA34A and samples from annually sampled well PA16 and PA18 exceeded the Secondary MCL of 50 ug/L. The manganese levels in the samples from each of the quarterly sampled wells vary within a restricted range. Wells giving samples with manganese detections seem clustered in two areas: one in the Cook-Irwin-Lanier County area and the other in the Candler-Emanuel-Jenkins-Telfair-Toombs County area. Iron was detected in 31 samples from 18 wells. Of these, three samples exceeded the Secondary MCL of 300 ug/L; annual wells PA9C (1,300 ug/L), GLY2 (730 ug/L) and LIB2 (870 ug/L). The iron contents of samples from three quarterly wells (PA23, PA34A and PA36) seemed to vary within restricted ranges. Detectable magnesium was found in all samples from all wells and spring except for those from quarterly well PA25 and annual well PA60. Magnesium concentrations ranged up to 86,000 ug/L (well PA9C), with a mean of

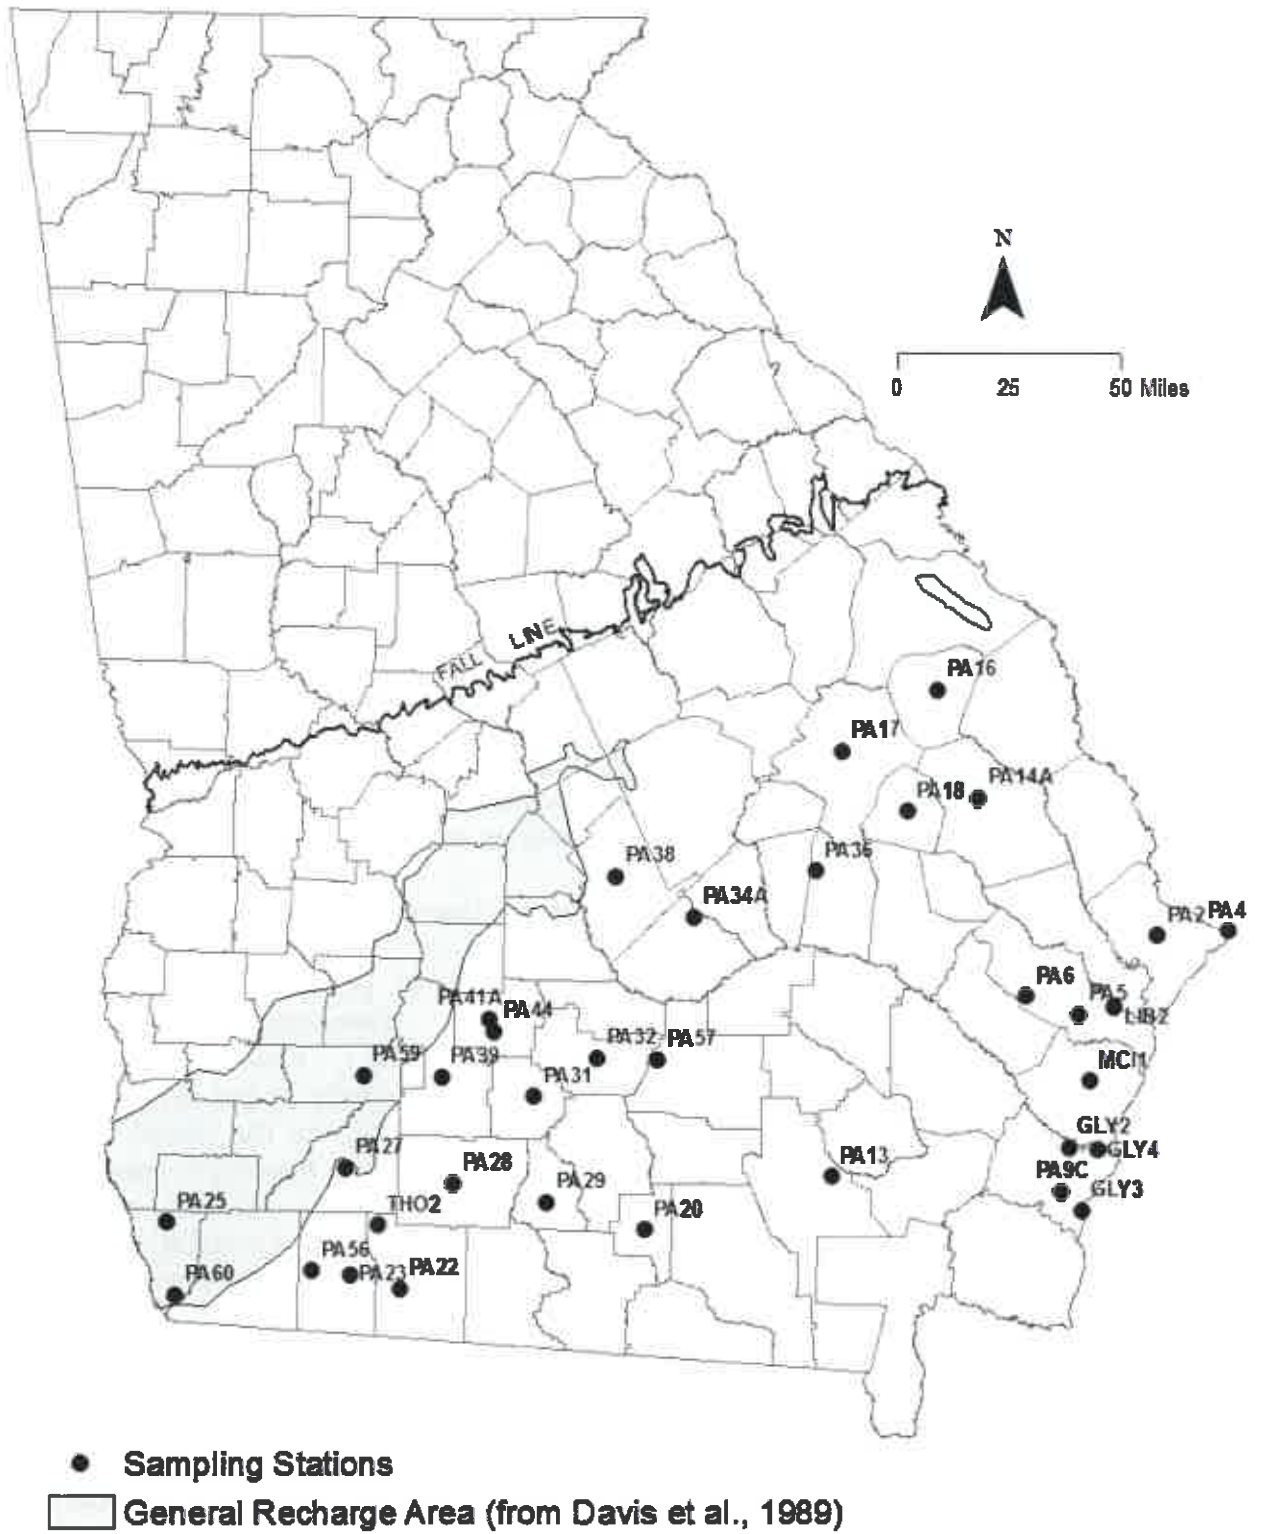


Figure 3-6. Locations of Stations Monitoring the Floridan Aquifer System.

14,138 ug/L and a median of 13,000 ug/L. Well PA25 is a Floridan recharge area well. Kellam and Gorday (1990) have noted that Ca/Mg ratios are higher in groundwaters from Floridan recharge areas, as is the case with this well. Magnesium levels in samples from each quarterly well seem to vary within relatively narrow ranges. Calcium was detected in all samples from the 35 Floridan wells and spring. Concentrations ranged from 20,000 ug/L (PA41A and THO2) to 120,000 ug/L (PA9C), with a mean of 40,031 ug/L and a median of 36,000 ug/L. For samples from quarterly wells, calcium concentrations seem to fall within a narrow range for each well. Aluminum was detected above the Secondary MCL of 50-200 ug/L in one sample from one well, PA57 (260 ug/L). Sodium was also found in all sample waters from all 35 wells and spring and ranged in concentration from 1,800 ug/L (PA27) to 420,000 ug/L (PA9C), with a mean of 17,248 ug/L and a median of 8,000 ug/L. Sodium concentrations generally increase with depth.

3.6.5 Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)

ICPMS analysis found the following detectable metals in the Floridan samples: copper, zinc, lead, arsenic, selenium, molybdenum and barium. Four samples from quarterly well PA23 registered arsenic detection below the Primary MCL (10 ug/L). Well PA23 has given intermittent samples with detectable arsenic before. Annual well PA9C gave a sample showing detectable selenium below the Primary MCL (50 ug/L). Five samples from three wells contained detectable copper, one from annual well PA17, three from quarterly well PA28 and one from quarterly well PA36. Annual wells PA4 and PA60 gave samples with detectable zinc. Quarterly well PA28 and annual well PA17, contained detectable lead. Copper and lead detections were below the action levels of 1,300 ug/L for copper and 15 ug/L for lead. The zinc concentration fell below the Secondary MCL of 5,000 ug/L. Twelve samples drawn from quarterly wells PA23, PA28 and PA56 contained detectable molybdenum. Well PA23 produced the sample with the highest concentration of 65 ug/L. All three wells are in the Gulf Trough area. Barium was detected in all samples from all wells and spring and ranged in concentration from 3.2 ug/L (PA60) to 220 ug/L (PA39), all below the Primary MCL of 2,000 ug/L. The mean concentration of barium was 82.5 ug/L and the median was 76 ug/L. Barium seems to be more abundant in samples from wells of 400 foot to 700-foot depth range.

3.7 MIOCENE/SURFICIAL AQUIFER SYSTEM

3.7.1 Aquifer System Characteristics

The Miocene/Surficial aquifer system is developed in sands of the Miocene Hawthorne Group and of the Pliocene Miccosukee and Cypresshead Formations of the Georgia Coastal Plain (Figure 3-7).

The Hawthorne Group covers most of the Coastal Plain and consists predominantly of sand and clay (Huddleston, 1988), although carbonate rocks and phosphorites may locally be significant (Huddleston, 1988; Clarke et al., 1990). Clarke et al., 1990, note that three sequences consisting of a basal dense phosphatic limestone layer, a middle clay layer, and an upper sand layer typify the Miocene section in the coastal area. The sand layers in the two lowermost of the sequences host the lower and upper Brunswick aquifers, which are included in the Miocene/Surficial aquifer system of this report.

The Cypresshead Formation overlies the Hawthorne Group in the Coastal area (from the Atlantic coast to about 45 miles inland) and consists, in updip areas, predominantly of fine to coarse-grained quartz sand and, in downdip areas, interbedded fine sand and clay (Huddleston, 1988). In the Coastal Plain of far south central and southwestern Georgia, the Miccosukee Formation overlies the Hawthorne Group (Huddleston, 1988).

The Miccosukee Formation consists predominantly of sand but contains some clay. The characteristic lithology consists of thin-bedded to laminated fine to medium sand with scattered layers or laminae of clay. Also included in the aquifer system are Pleistocene arkosic sands and gravels interbedded with clays and Holocene sands and gravels interbedded with muds. The upper part of the aquifer system is unconfined, whereas, the deeper parts of the system may be locally confined and under artesian conditions.

Seven annually sampled wells were used to monitor the Miocene/Surficial aquifer system. Wells MI1, MI2A, MI9A and MI10B are private domestic wells, well WAY1 is a public supply well for a mobile home park and MI9A and MI10B are no longer being used as drinking water sources. Well MI16 is used for general purposes at a fire station. Well MI17 originated as a geologic bore hole -- a hole drilled for investigating bedrock -- that became a flowing well. It is currently used both as a domestic water source and as an augmentation well for maintaining a pond. Wells MI2A and MI9A are bored wells. The remainder are drilled wells. Depths, actual or approximate, have been determined for all seven wells.

3.7.2 Field Parameters

The pHs of the sample waters from the seven wells used to monitor the Miocene/Surficial aquifer system ranged from 4.04 (MI2A) to 7.83 (WAY1). Three of the seven wells sampled (MI2A, MI9A and MI10B) produced acidic water. The

remaining five wells gave basic water. The acidic water-yielding wells included the two shallowest, while the basic water-producing wells included the two deepest. Conductivities ranged from 106 $\mu\text{S}/\text{cm}$ (MI10B) to 312 $\mu\text{S}/\text{cm}$ (MI16). Water temperatures ranged from 18.85 degrees C (MI17) to 25.17 degrees C (MI9A). Dissolved oxygen data are available for five of the seven wells and range from 0.77 mg/L (MI16) to 7.15 mg/L (MI10B). Valid dissolved oxygen measurements cannot be made on well MI9A and MI17 since one must be sampled with a bailer and the other is exposed to air before sampling.

3.7.3 Major Anions, Non-Metals, and Volatile Organic Compounds


Chloride registered at 16 mg/L and 19 mg/L in samples from the two bored wells MI2A and MI9A respectively. The sample from the deepest Miocene well (MI16) provided the only sulfate detection at 34 mg/L. Nitrate/nitrite was detected in the sample water from the bored well MI2A at 8.5 mg/L as nitrogen, which lies in the range of likely human influence (≥ 3.1 mg/L as nitrogen) (Madison and Brunett, 1984) and from the bored well MI9A at 19.0 mg/L as nitrogen which exceeded the Primary MCL of 10 mg/L. Detectable phosphorus was found in samples from six of the seven wells. The concentrations ranged from not detected (MI2A) to 0.52 mg/L (MI10B). One of the samples contained detectable VOCs in the form of chloroform at 1.7 $\mu\text{g}/\text{L}$.

3.7.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP)

Samples from all seven wells contained calcium, magnesium, and sodium. Calcium levels ranged from 4,200 $\mu\text{g}/\text{L}$ (well MI2A) to 43,000 $\mu\text{g}/\text{L}$ (well MI17). Magnesium levels ranged from 2,000 $\mu\text{g}/\text{L}$ (well MI17) to 17,000 $\mu\text{g}/\text{L}$ (well MI16). Sodium levels ranged from 6,600 $\mu\text{g}/\text{L}$ (well MI9A) to 17,000 $\mu\text{g}/\text{L}$ (well MI16). Potassium was detected in well MI2A (6,800 $\mu\text{g}/\text{L}$) and well MI9A (11,000 $\mu\text{g}/\text{L}$). Iron was detected in the sample from well MI9A at 46 $\mu\text{g}/\text{L}$ and well MI10B at 3,500 $\mu\text{g}/\text{L}$. This last value far exceeds the Secondary MCL for iron of 300 $\mu\text{g}/\text{L}$. Manganese was found in samples from five wells: MI2A (10 $\mu\text{g}/\text{L}$), MI9A (13 $\mu\text{g}/\text{L}$), MI10B (92 $\mu\text{g}/\text{L}$), MI17 (12 $\mu\text{g}/\text{L}$) and WAY1 (82 $\mu\text{g}/\text{L}$). The 82 $\mu\text{g}/\text{L}$ and 92 $\mu\text{g}/\text{L}$ levels exceed the Secondary MCL for manganese of 50 $\mu\text{g}/\text{L}$. The high iron and manganese levels in water from drilled well MI10B are the reason the residents ceased using the water for household purposes, i.e., cooking, drinking, and laundering. Aluminum was detected in well MI2A at a concentration of 170 $\mu\text{g}/\text{L}$ and well MI9A at a level of 100 $\mu\text{g}/\text{L}$, both above the Secondary MCL range of 50-200 $\mu\text{g}/\text{L}$.

3.7.5 Metals by Inductively-Coupled Plasma/Mass Spectrometry (ICPMS)

ICPMS analyses found detectable copper, zinc, selenium, barium, and lead in the Miocene aquifer samples. All seven samples contained detectable barium, which ranged in concentration from 18 $\mu\text{g}/\text{L}$ (MI1) to 160 $\mu\text{g}/\text{L}$ (MI10B). The sample from drilled well MI10B contained selenium at a level of 25 $\mu\text{g}/\text{L}$. Selenium at

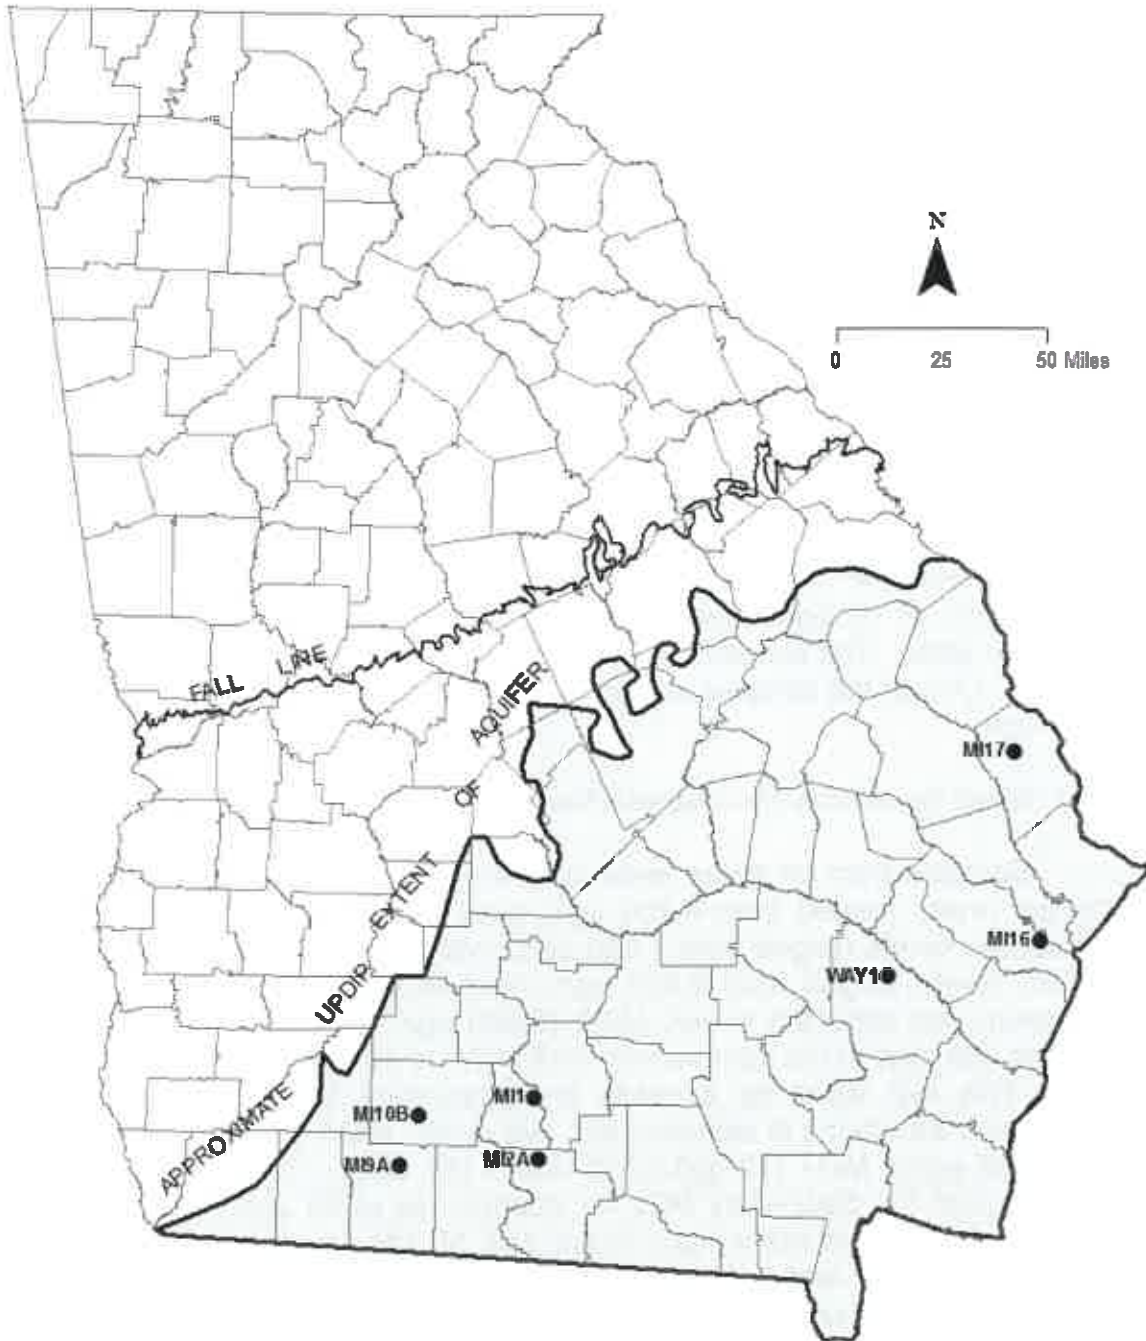

- Sampling Stations
- General Recharge Area (from O'Connell and Davis, 1991)

Figure 3-7. Locations of Stations Monitoring the Miocene/Surficial Aquifer System.

detectable levels is rare in Georgia's groundwater. Zinc was detected in samples from well MI1 (30 ug/L), MI2A (13 ug/L), MI9A (50 ug/L) and MI10B (31 ug/L). Detectable lead occurred in the sample from bored well MI2A (4.7 ug/L) and well MI10B (2.5 ug/L). The samples from wells MI2A, MI9A and MI10B also contained copper at levels of 8.3 ug/L, 30 ug/L and 13 ug/L respectively. The copper, lead, and zinc in the water samples were likely derived from plumbing. None of the metals exceeded applicable action levels (1,300 ug/L for copper and 15 ug/L for lead) or MCLs (5,000 ug/L Secondary for zinc).

3.8 PIEDMONT/BLUE RIDGE AQUIFER SYSTEM

3.8.1 Aquifer System Characteristics

The Piedmont/Blue Ridge aquifer system in Georgia is part of the Piedmont and mountain aquifer system that extends from New Jersey into Alabama (Daniel and Harned, 1997). The system is unconfined or semiconfined and is composed of two major hydrogeologic units: a) regolith and b) fractured igneous and metamorphic bedrock (Heath, 1980; Daniel and Harned, 1997). Figure 3-8 shows the extent of the system in Georgia.

The regolith hydrologic unit is comprised of a mantle of soil, alluvium in and near stream bottoms and underlying saprolite. Saprolite is bedrock that has undergone extensive chemical weathering in place. Downward percolating, typically acidic, groundwater leaches alkali, alkaline earth and certain other divalent metals from micas, feldspars, and other minerals composing the original rock, leaving behind a clay-rich residual material. Textures and structures of the original rock are usually well-preserved, with the saprolite appearing as a highly weathered version of the original rock. The regolith unit is characterized by high mostly primary porosity (35% to 55%) (Daniel and Harned, 1998) and serves as the reservoir that feeds water into the underlying fractured bedrock. Though it can store a great deal of water, saprolite, owing to its clay content, is relatively impermeable. Saprolite grades downward through a transition zone consisting of saprolite and partially weathered bedrock with some fresh bedrock into fresh bedrock.

The fractured bedrock hydrologic unit is developed in igneous and metamorphic rocks. In contrast to the regolith, the porosity in such rocks is almost totally secondary, consisting of fractures and solution-enlarged voids. In the North Carolina Piedmont, Daniel and Harned (1997) found 1% to 3% porosity typical for bedrock. Fractures consist of faults, breaks in the rock with differential displacement between the broken sections, and joints, breaks in the rock with little or no differential displacement Heath (1980). Fractures tend to be wider and more numerous closer to the top of the bedrock. Daniel and Harned (1997) noted that at a depth of about 600 feet, pressure from the overlying rock column becomes too great and holds fractures shut. Fracturing in schistose rocks consists mainly of a network of fine, hair-line cracks which yield water slowly. Fractures in more massive rocks (e.g. granitic rocks, diabases, gneisses, marbles, quartzites) are

mostly open and are subject to conduit flow. Thus, wells intersecting massive-rock fractures are able to yield far larger amounts of water than wells in schistose rocks or even wells in regolith. Fractures can be concentrated along fault zones, shear zones, late-generation fold axes, foliation planes, lithologic contacts, compositional layers, or intrusion boundaries.

Seventy samples from 36 wells and four springs were used to monitor water quality in the Piedmont/Blue Ridge aquifer system. Thirty-five of these wells are drilled. Thirty-one of the 36 wells are public supply wells, and the remaining five are domestic. One of the 36 wells is bored (P33) and is in domestic use. Of the four springs, three (P12A, HAS2 and TOW1) are mineral springs at State Parks, and the other spring (BR5) is a public supply source. The State Park mineral spring P12A and the following wells are scheduled for sampling on a quarterly basis: P21, P23, P25, P32, P33, P34, P35, P37 and BR1B. Well P25 was added to the network on a quarterly basis, and per agreement with the State Park manager an annual filtered sample is to be collected in addition to the quarterly unfiltered ones. The remaining stations are sampled on a yearly basis. Where their depths are known, wells deriving water from the bedrock aquifer range in depth from 150 feet to 705 feet. Domestic bored well P33, the only well drawing from the regolith aquifer, is 47 feet deep.

3.8.2 Field Parameters

Seventy pH measurements from all 40 stations are available for the Piedmont/Blue Ridge aquifer system. The pHs ranged from 4.36 (HAS2) to 7.75 (P32). Eighteen total samples were basic; all four samples from quarterly well P32, three samples from quarterly spring P12A and one sample from annual wells P20, P24, P30, P35, BAN1A, COU2, FAY1 18.8, MAD1, UPS1, WAS3 and BR1B. The remaining samples were acidic, including all samples from quarterly regolith well P33. The mean pH was 6.53 and the median 6.54. Conductivity measurements are available for all 70 samples. Conductivities range from 12 uS/cm (HAS2) to 920 uS/cm (well P32). The mean conductivity was 227 uS/cm and the median was 185 uS/cm. Samples with the higher pHs generally tended to have higher conductivities and vice versa. Temperatures were available for all sampled waters and range from 10.49 degrees C (spring TOW1) to 30.39 degrees C (well HAL1). The mean temperature was 17.97 degrees C and the median was 17.95 degrees C. Geothermally elevated temperatures are not readily apparent for the Piedmont/Blue Ridge. Latitude, ground elevation, and season appear to have more influence on the sampling temperature. Dissolved oxygen measurements are available for 59 of the 70 samples from 33 of 40 stations. The samples from quarterly spring P12A and annual springs HAS2, BR5, and TOW1 and wells P35, P39, COU2 and FAY1 18.8 received no dissolved oxygen measurements since exposure of the sample water to air can render the measurement inaccurate. Dissolved oxygen levels ranged from 0.09 mg/L for well WAS3 to 9.21 mg/L for well COU1. The 9.21 mg/L reading lies just above the oxygen saturation level for the temperature at sampling (19.34 degrees C). This reading suggests free-falling (cascading) water in the well or entrainment of air at the pump intake due to a low pumping water level and does not reflect the actual oxygen level in the groundwater.

3.8.3 Major Anions, Non-Metals, and Volatile Organic Compounds

All samples received testing for chloride, sulfate, nitrate/nitrite, total phosphorus, and VOCs. Four samples each from spring P12A and well P23, both located at Indian Springs State Park, received testing for fluoride. Four stations yielded 10 samples with detectable chloride: quarterly well P37 and quarterly spring P12A with all four samples; and annual wells P30 and WAS3 with one sample each. Well P37 gave the sample with the highest level at 40 mg/L. Detectable fluoride occurred in all four samples from well P23 at levels between 0.99 mg/L and 1.20 mg/L. Detectable fluoride also occurred in all four samples from quarterly spring P12A at levels ranging from 4.5 mg/L to 4.7 mg/L. This last range of levels exceeds the Primary MCL of 4 mg/L for fluoride; the spring water from this station has consistently done so in the past. Historical fluoride levels have ranged from slightly above 4 mg/L to slightly above 5 mg/L. Sulfate was detected in 36 samples from seven quarterly and ten annual stations, with the highest concentration (380 mg/L) occurring in a sample from quarterly well P32. Quarterly spring P12A and quarterly wells P25, P32, P37, P34, P21 and BR1B each have sulfate values that vary within narrow ranges. Nitrate/nitrite was detected in 50 of 70 samples from 29 stations with a high concentration of 3.80 mg/L as nitrogen for annual well HAL1. This level is well below the Primary MCL of 10 mg/L as nitrogen. Detectable phosphorus occurred in 51 samples from 30 stations, with the highest concentration of 0.20 mg/L being found for quarterly well P34. Phosphorus concentrations vary within narrow ranges within the quartets of samples from quarterly spring P12A and from quarterly wells P21, P23, P25, P33, P34 and P35. Detectable VOCs occurred in samples from wells P22 (chloroform 1.3 ug/L), COU4 (methyl tert-butyl ether 0.98 ug/L) and UPS1 (chloroform 1.1 ug/L). Chloroform is a disinfectant by-product.

3.8.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP)

ICP analysis found detectable aluminum, calcium, iron, potassium, magnesium, manganese, and sodium. No beryllium, cobalt, titanium, or vanadium was detected. Calcium was found in all samples except springs HAS2 and TOW1. These two springs are located in FD Roosevelt State Park (HAS2) and Brasstown Bald Recreation Area (TOW1). The reason for no detectable calcium in these two springs is probably because these two springs flow through a homogeneous quartzite rock. The highest calcium levels (210,000 ug/L, 200,000 ug/L, 150,000 ug/L and 130,000 ug/L) occurred in the quarterly samples from well P32. The mean calcium concentration was 29,176 ug/L and the median concentration was 19,000 ug/L. As a rule, calcium levels of samples from each quarterly station tend to cluster closely. Magnesium was detected in 61 samples from 34 stations. Magnesium contents of sample waters ranged from not detected up to 28,000 ug/L (well P30). As with calcium, magnesium levels in samples from each quarterly well generally tend to cluster. All samples from the quarterly regolith well P33 and samples from annual bedrock wells P38 and BAN1A and annual springs BR5, HAS2 and TOW1 contained no detectable magnesium. Sodium was present in 69 of 70 samples and ranged from not detected in the sample from spring HAS2

to 38,000 ug/L in two samples from spring P12A. Sodium levels for each quarterly well have a general tendency to cluster. The mean sodium concentration was 12,524 ug/L and the median was 10,500 ug/L. Detectable potassium was found in all four samples from one station (well P35) in a range of 6,900 ug/L to 7,400 ug/L. The low sensitivity of the current laboratory testing procedure for potassium probably accounts for the apparent scarcity of this metal. Aluminum was detected in eight samples from wells P23, P25, P30, P33, P37 and ELB1. Well P33 registered the highest level at 230 ug/L. Aluminum levels exceeded the Secondary MCL range of 50-200 ug/L in all eight samples. Iron was detected in 41 samples from 24 wells and one spring, with a range from not detected up to 2,100 ug/L (well COU3). This concentration exceeds the Secondary MCL for iron of 300 ug/L. Nine other wells produced samples with an iron level greater than the Secondary MCL; P23 (370 ug/L), P33 (370 ug/L), P37 (600 ug/L), P39 (310 ug/L), COU1 (1,000 ug/L), FAY1 18.8 (1,500 ug/L), FRA1 (620 ug/L), MAD1 (590 ug/L) and WHI1 (410 ug/L). Manganese was detected in 49 samples from 23 wells and two springs, with a maximum concentration of 360 ug/L (well COU3). Twenty-four samples from wells P20, P21, P25, P35, P37, COU1, COU2, COU3, COU4, FRA1, HAS1, MAD1 and WAS3 equaled or exceeded the Secondary MCL of 50 ug/L.

3.8.5 Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)

ICPMS analysis of water samples detected the following metals: copper, zinc, molybdenum, barium, lead and uranium. None of the following metals were found in detectable amounts: chromium, nickel, arsenic, selenium, silver, cadmium, tin, antimony and thallium. Molybdenum was detected in only one sample from well BAN1A. Copper occurred in 9 samples from 5 wells, with a maximum level of 51 ug/L in the sample from well P22. This sample also had one of the lowest pHs. All copper detections occurred in acidic waters, with the highest pH for a sample containing detectable copper registering at 6.64. No detectable copper occurred in neutral or basic waters. Zinc was detected in 24 samples from 17 wells, with the maximum level at 290 ug/L from well COU3. All zinc detections except for wells P20 (pH 7.48), P24 (pH 7.36), and FAY1 18.8 (pH 7.10) occurred in acidic waters. Lead was detected in four samples from three wells. All lead detections occurred in acidic water. All lead detections occurred with zinc or copper detections except in well UNI1. Again, these three metals commonly leach into sample water from plumbing and are not necessarily present naturally. Barium, as elsewhere in the State's groundwater, was a nearly ubiquitous trace metal, being detected in 64 samples from 35 wells and three springs. Four samples from quarterly spring P12A and two samples from quarterly well P32 contained no detectable barium. The maximum concentration was 210 ug/L from a sample from annual well P20. No samples exceeded the Primary MCL of 2,000 ug/L. Uranium was detected in eight samples from five wells. Uranium detections were down from previous years due to the reporting limit of the lab going from the previous 1.0 ug/L to 10 ug/L. Uranium concentrations ranged from not detected up to 21.5 ug/L found in a sample from well P34. Granitic bedrock is present where these wells are drilled and is the most common bedrock type to host uraniferous water.

3.9 VALLEY AND RIDGE/APPALACHIAN PLATEAU AQUIFER SYSTEM

3.9.1 Aquifer System Characteristics

Since Georgia's portion of the Appalachian Plateau Province extends over such a small area of the State, i.e., its northwestern corner, this report includes that province with the Valley and Ridge Province for purposes of discussion. Bedrock in the combined province is sedimentary, comprising limestones, dolostones, shales, siltstones, mudstones, conglomerates and sandstones (Figure 3-9).

Primary porosity in the province's bedrock is low, leaving fractures and solution-enlarged voids as the main water-bearing structures. The bedrock in the province is extensively faulted and folded, conditions that have served to proliferate fracturing and to segment water-bearing strata into numerous local flow systems, in contrast to the expansive regional flow regimes characteristic of the Coastal Plain sediments. Fractures in limestones and dolostones can become much enlarged by solution, greatly increasing their ability to store water.

Zones of intense fracturing commonly occur in carbonate bedrock along such structures as fold axes and fault planes and are especially prone to weathering. Such zones of intense fracturing give rise to broad valleys with gently sloping sides and bottoms covered with thick regolith. The carbonate bedrock beneath such valleys presents a voluminous source of typically hard groundwater.

As in the Piedmont/Blue Ridge Province, the regolithic mantle of soil and residuum derived from weathered bedrock blankets much of the Valley and Ridge/Appalachian Plateau Province. The water table lying within the regolithic mantle yields soft water ("freestone" water) sufficient for domestic and light agricultural use (Cressler et al., 1976; 1979). The regolithic mantle also acts as a reservoir, furnishing water to the underlying bedrock, which supplies most of the useful groundwater in the province.

Monitoring water quality in the Valley and Ridge/Appalachian Plateau aquifers made use of four springs and two drilled wells (Figure 3-9). Springs VR2A, VR8 and VR10 are public supply springs. Spring VR3 is a former public supply spring now serving ornamental purposes in a public park. Well VR1 is a public supply well and well VR6A is an industrial process water source. Spring VR8 is scheduled for quarterly sampling, while all the other stations are sampled on an annual basis. All stations tap carbonate bedrock aquifers.

3.9.2 Field Parameters

Sample water pHs ranged from 7.12 for well VR3 to 7.48 for spring VR8. Conductivities ranged from 263 uS/cm (well VR1) to 306 uS/cm (spring VR2A). Dissolved oxygen measurements are available for well VR1 (9.17 mg/L) and well VR6A (5.48 mg/L). Dissolved oxygen measurements were made on spring waters

at or downstream of spring heads; however, due to atmospheric exposure at the spring heads, these measurements may not validly represent oxygen levels in the water prior to discharge. The temperature of sample waters from well VR1 was 16.33 degrees C and 17.50 degrees C from well VR6A. For spring waters, contact with the surface environment may have altered actual water temperatures present at the spring heads, since water temperatures were measured downstream from the springheads.

3.9.3 Major Anions, Non-Metals, and Volatile Organic Compounds


Neither chloride nor sulfate was detected in any of the sample waters. Detectable nitrate/nitrite was present in all of the sample waters and ranged from 0.69 mg/L as nitrogen in well VR1 to 1.80 mg/L as nitrogen in spring VR10. Phosphorus was detected in two wells; well VR2A (0.03 mg/L) and well VR6A (0.02 mg/L). The sample from well VR6A was the only one to contain detectable VOCs. The compounds consisted of: 1,1-dichloroethylene at 1.3 ug/L (Primary MCL = 7 ug/L) and tetrachloroethylene at 1.9 ug/L (Primary MCL = 5 ug/L). These compounds, particularly the chlorinated ethylenes, are used primarily as solvents. The owner/user of well VR6A manufactures barium and strontium compounds and anthraquinone.

3.9.4 Metals by Inductively-Coupled Plasma Spectrometry (ICP)

ICP analysis found calcium, magnesium, and sodium in all samples, aluminum in one sample, iron in three samples, manganese in one sample and titanium in one sample. Aluminum was detected in one sample from spring VR2A at a level of 230 ug/L. This aluminum level exceeded the Secondary MCL range of 50-200 ug/L. Detectable iron was present in the sample from spring VR2A (390 ug/L) above the iron Secondary MCL of 300 ug/L and two of the four samples from spring VR8 (21 ug/L and 29 ug/L) below the Secondary MCL of 300 ug/L. Spring VR2A gave the only water sample with detectable manganese at 36 ug/L and titanium at 11 ug/L. Calcium levels ranged from 28,000 ug/L from well VR6A to 41,000 ug/L from spring VR2A. Magnesium levels ranged from 15,000 ug/L from springs VR2A, VR3 and VR10 to 18,000 ug/L from wells VR1 and VR6A. Sodium levels ranged from 1,300 ug/L from spring VR3 to 6,700 ug/L from well VR6A.

3.9.5 Metals by Inductively-Coupled Plasma Mass Spectrometry (ICPMS)

ICPMS analysis found zinc, barium and lead. Detectable barium was present in all samples and ranged from 9.3 ug/L from well VR1 to 490 ug/L from well VR6A. All samples save the one from VR6A have barium levels below 100 ug/L. Well VR6A furnishes process water to a firm that manufactures barium and strontium compounds and is situated in an area that sees the mining and processing of barite. Zinc and lead were detected in one sample from spring VR2A at levels of 17.0 ug/L for zinc and 1.9 ug/L for lead.

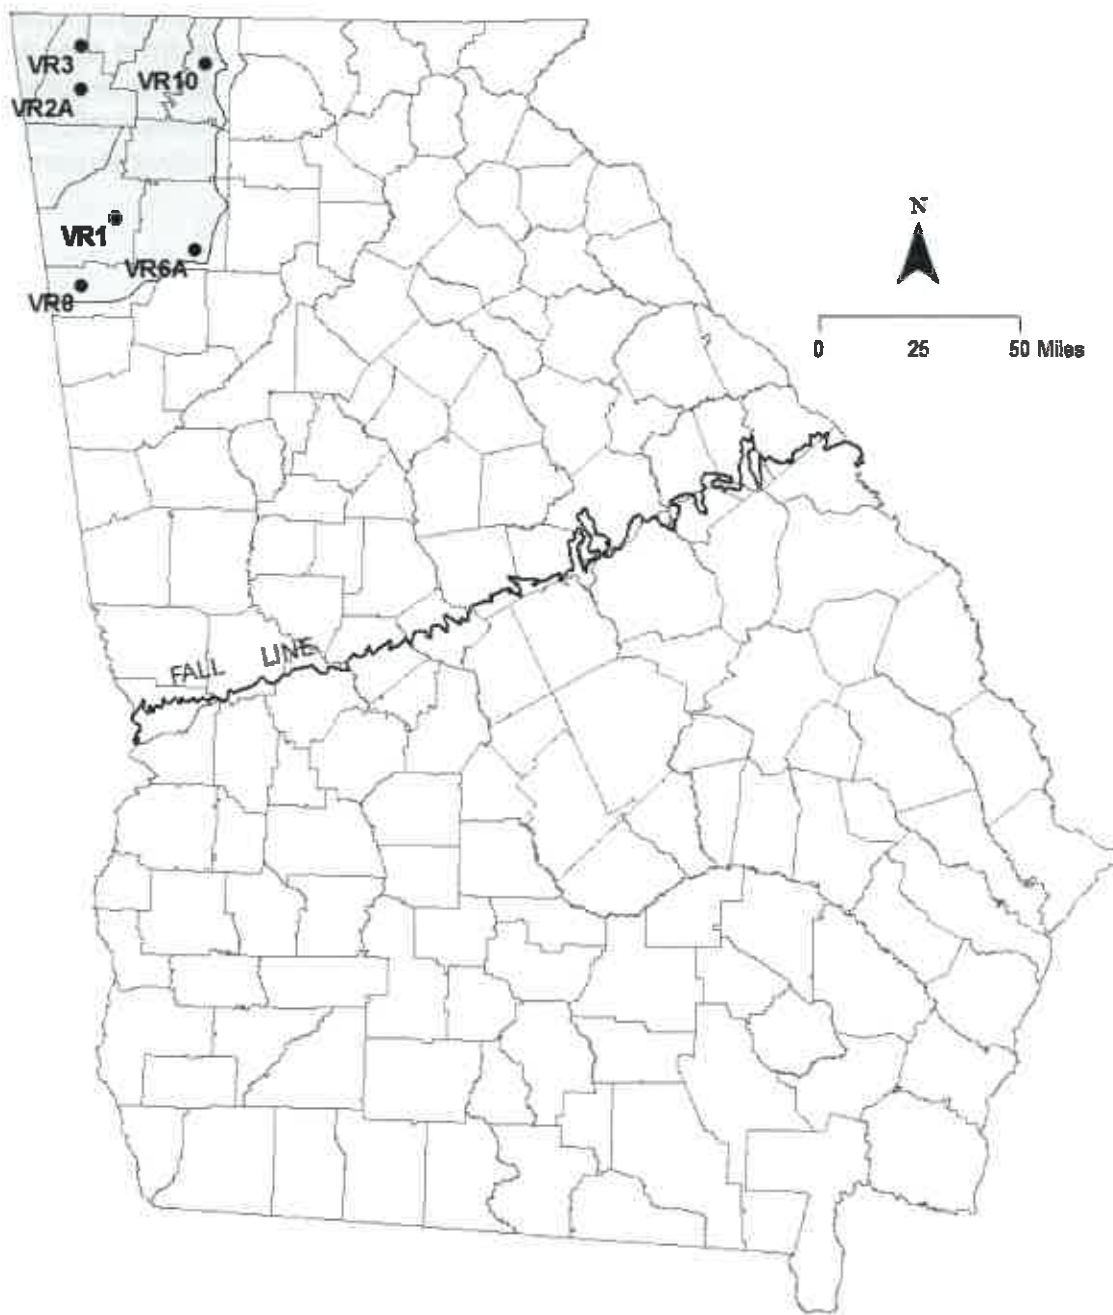

- Sampling Stations
- General Recharge Area (from Davis et al., 1989)

Figure 3-9. Locations of Stations Monitoring the Valley-and-Ridge/Appalachian Plateau Aquifer System.

CHAPTER 4 SUMMARY AND CONCLUSIONS

EPD personnel collected 188 water samples from 116 wells and nine springs on the Groundwater Monitoring Network during the calendar year 2017. The samples were analyzed for VOCs, chloride, sulfate, nitrate/nitrite, total phosphorus, 14 trace metals by ICPMS analysis, and 23 major metals by ICP analysis. Waters from two neighboring stations in the central Piedmont received analyses for fluoride because one of the stations was known to produce water with excessive levels of fluoride. These wells and springs monitor the water quality of eight major aquifers and aquifer systems as considered for this report in Georgia:

Cretaceous/Providence aquifer system,
Clayton aquifer,
Claiborne aquifer,
Jacksonian aquifer
Floridan aquifer system,
Miocene/Recent aquifer system,
Piedmont/Blue Ridge aquifer system,
Valley and Ridge/Appalachian Plateau aquifer system.

4.1 PHYSICAL PARAMETERS AND pH

4.1.1 pH

The Cretaceous/Providence aquifer system, developed in Coastal Plain sands, furnished waters with the overall lowest pHs. This aquifer system featured only four of 21 wells yielding waters with basic pHs.

Not many stations were available to sample wells tapping the Clayton, Claiborne, or Jacksonian aquifers. However, the results are these: 1) Clayton – acidic – as expected for updip portions of the aquifer, downdip portions should be basic; 2) Claiborne – one basic, two acidic – the two acidic-yielding wells are fairly shallow and updip in sands; the basic-yielding well is deeper and probably penetrates some limey sand or limestone; 3) Jacksonian – all ten wells were basic or nearly neutral – basic and neutral waters should be expected from limey sands.

The Floridan aquifer system, as might be expected for carbonate-rock aquifers, gave waters with mildly basic pHs. Waters from the Floridan are the most basic in pH of any in the study.

The Miocene aquifer system is developed in sands. However, these may include shelly detritus in some places (evident at surface excavations near well MI17 and at coastal well MI16). Dissolution of such detritus can raise the pHs of groundwaters in such areas, giving water from these wells a nearly neutral to mildly basic pH. In places where such shelly matter is not available, waters emerge with low pHs, as at well MI2A.

Sample-water pHs in the Piedmont/Blue Ridge are generally mildly acidic, with 18 out of 70 sample measurements exceeding or equaling a pH of 7.00.

The Valley-and-Ridge/Appalachian Plateau sampling stations are all located in the Valley-and-Ridge sector. With carbonate rocks being the major aquifer media, samples from the sector would be expected to be mildly basic, which all nine samples taken in the sector were found to be basic with some samples close to neutral. In the past, some of these samples were found to be slightly acidic instead of all samples being basic. The seeming incidence of past acidic waters was probably due to a larger amount of typically acidic precipitation entering the springs' flow systems than the carbonate bedrock can neutralize.

The very acidic pHs of the sample waters in the updip portions of the Jacksonian, Clayton, Claiborne, and, particularly, the Cretaceous/Providence can face metal plumbing with leaching and corrosion problems. Such waters may contain elevated or excessive, but not naturally occurring, levels of lead, copper, and zinc.

4.1.2 Conductivity

Conductivity in groundwaters from the sandy Cretaceous/ Providence aquifer system seems to be highest for the deeper wells in the Providence sands near the Chattahoochee River. Overall, conductivities are relatively low, in the range of lower tens of microsiemens.

Similar conductivities can be found in waters from the updip portions of the Clayton and Claiborne aquifers, where the media consist mostly of sand. For the Piedmont/Blue Ridge aquifer system, low conductivities could be associated with groundwaters hosted by quartzites or quartz veins. High conductivities may arise in waters in deep flow regimes where waters are long in contact with granitic and other reactive host rocks.

Conductivities of groundwaters in the Floridan and other carbonate rock aquifers are generally higher than those in siliceous rocks. This condition results from the dissolution of carbonate minerals, in cases augmented by dissolution of intergranular sulfate, where dissolved sulfate will also be present in the water.

4.1.3 Temperature

Groundwater temperatures measured under the current sampling procedure are only approximations of the actual groundwater temperature, as some heating can result from the action of pumping and heating or cooling can result from exposure to ambient surface conditions. Nevertheless, groundwaters from shallower wells in the northern part of the State are overall somewhat cooler than those from the southern part; and those from wells much deeper than about 400 to 500 feet show effects from geothermal warming.

4.2 ANIONS, NON-METALS AND VOCS

4.2.1 Chloride and Fluoride

Water samples receive testing for fluoride only at Piedmont/Blue Ridge stations P12A, a mineral spring, and well P23, a nearby well. All four samples from spring P12A exceeded the Primary MCL for fluoride. Testing more stations for fluoride could provide a better base level assessment of fluoride contents in the State's ambient groundwaters.

Chloride at currently detectable levels is not too common in ambient groundwaters. Abundance seems to be largest in the deeper Floridan waters, which had detections at ten out of 35 stations. The Floridan occurrences seem restricted to the Gulf Trough and Coastal areas, with the Coastal area sample from well PA9C giving the study's only Secondary MCL exceedance for chloride. The Miocene/Surficial aquifer is the next most abundant with two of seven stations of less than 100 feet depth giving water with detectable chloride. Chloride is also relatively abundant in Piedmont/Blue Ridge waters, detected at four out of 40 stations. The Cretaceous aquifer system had one chloride detection out of 21 stations and the Clayton aquifer had one chloride detection out of three stations.

4.2.2 Sulfate

Sulfate is more widespread than chloride. Sulfate is more abundant in deeper waters, with the shallowest occurrence, aside from Piedmont/Blue Ridge mineral spring P12A, being 150 feet-deep well MAR1 in the Cretaceous aquifer. Sulfate seems more abundant in Floridan sample waters, detectable at 16 out of 35 stations. Sulfate is also abundant in the Piedmont/Blue Ridge, occurring in detectable amounts in waters from 17 of 40 stations. The Cretaceous aquifer yielded samples containing detectable sulfate in eight out of 21 stations. Jacksonian sample waters yielded two out of ten stations with detectable sulfate. The sample from Piedmont well P32 yielded the study's highest overall sulfate content and a Secondary MCL exceedance. The lowest incidences of detectable sulfate were in the Miocene/Surficial at one of seven stations, Clayton aquifer with one of three stations and Claiborne aquifer with one of three stations.

4.2.3 Nitrate/Nitrite

One hundred three (103) samples from 71 of the 125 stations sampled for this project contained detectable nitrate/nitrite. At least one sampling station drawing from each of the aquifers and aquifer systems discussed in this report gave a sample with detectable nitrate/nitrite. The combined substances are most widespread among the Valley and Ridge/Appalachian Plateau and Clayton samples, where all stations gave samples containing detectable amounts. The combined substances are also widespread in Piedmont/Blue Ridge and Floridan waters. The four highest concentrations of nitrate/nitrite (19.0 mg/L well MI9A, 8.5 mg/L well MI2A, 3.9 well HAL1 and 3.3 mg/L well WKE1) occurred at Miocene/Surficial and Piedmont stations. All four samples exceeded the naturally occurring maximum level of 3 mg/L (as nitrogen), a level generally considered to indicate human influence (Madison and Brunett, 1984; Gaskin et al., 2003).

Since nitrate/nitrite, an oxidant, becomes depleted the farther water travels away from oxidizing near-surface environments and into reducing ones, a crude inverse relation exists between the concentration of the combined substances and well depths. The nitrate/nitrite concentrations in Floridan samples illustrate this: the combined substances are undetected in wells deeper than about 650 feet (except for well PA13 775 feet deep) and reach a maximum concentration of 2.1 mg/L in spring PA59 and 1.7 mg/L and 1.8 mg/L in four of four samples from well PA25, 174 feet deep. The situation in the Piedmont/Blue Ridge is less straightforward, as mineral spring P12A lacks detectable nitrate/nitrite in all four quarterly samples and well P24 at 705 feet and well P39 at 600 feet gave water with a concentration of 0.25 mg/L and 0.96 mg/L respectively.

4.2.4 Phosphorus

Analyses determine only total phosphorus; the method used (EPA Method 365.1) for testing cannot determine how the element is bound. There were only three samples from three stations collected for the Claiborne, however this aquifer registered the highest mean phosphorus content of 0.30 mg/L. Of the more extensively sampled Piedmont/Blue Ridge and Floridan aquifer systems, the former registered a mean phosphorus content of 0.05 mg/L and the latter a content of 0.02 mg/L. The high phosphorus value for the Floridan was .07 mg/L and the high for the Piedmont/Blue Ridge was 0.20 mg/L. The highest value for all the aquifers was in the Cretaceous aquifer system at a level of 1.10 mg/L detected in the sample from station MAC1. However, the Cretaceous still only registered a mean phosphorus content of 0.08 mg/L. The apparent low phosphorus content occurred for the Clayton aquifer with no detections.

4.2.5 Dissolved Oxygen

The measurement of dissolved oxygen contents is beset with some difficulties that can cause spurious values: instrument malfunction; aeration of well water due to cascading or to a pump's entraining air at low pumping water levels;

measuring at spring pools or at sampling points that cannot be isolated from atmosphere. Nevertheless, measured dissolved oxygen generally decreases with well depth.

4.2.6 Volatile Organic Compounds

Volatile organic compounds (VOCs) were found in nine samples from eight wells and one spring (see Table 4-2). None exceeded their respective Primary MCLs. The trihalomethanes -- chloroform, bromodichloromethane, chlorodibromomethane, and bromoform -- were the most widely occurring of the VOCs. These compounds result from halogen-bearing disinfectants reacting with organic matter naturally present in the water. Two scenarios accompany the occurrence of the compounds. The first involves disinfection of the well and plumbing components incident to maintenance or repairs, as took place in well P22 and well MI2A. The second scenario involves leaking check valves or foot valves that allow disinfectant-treated water to flow back down the well when pumps are off, as apparently happened with well PA23 in the past.

Well VR6A and spring PA59 yielded water containing chlorinated ethylene compounds. Sample water from VR6A has also contained detectable chlorinated benzene compounds in the past. The former are used as solvents; in addition to solvent uses, the latter can be used as disinfectants, fumigants, pesticides, and starters for manufacturing other compounds. The owner of well VR6A, Chemical Products Corporation, manufactures barium and strontium compounds.

Well COU4 yielded water containing methyl tert-butyl ether (MTBE; 2-methoxy-2-methyl-propane), which has no MCL. An advisory range of 20 ug/L to 40 ug/L has preliminarily been set due to offensive taste and smell. The compound has been added to motor fuels as an oxygenate (promotes cleaner burning). That use is being curtailed due to the greater water solubility of the compound compared to other fuel components thus its heightened ability to contaminate groundwater. Data on the long-term health effects of the compound are sparse.

4.3 ICP METALS

Analysis using inductively coupled plasma spectrometry (ICP) works well for metals that occur in larger concentrations in groundwater samples. Samples in this study were not filtered, so the method measured analytes that occurred in fine suspended matter as well as those occurring as solutes. The laboratory used the technique to test for aluminum, beryllium, calcium, cobalt, iron, potassium, magnesium, manganese, sodium, titanium, and vanadium. No beryllium, cobalt or vanadium occurred in any samples at detectable levels.

4.3.1 Aluminum

Aluminum, a common naturally occurring metal in the State's groundwater

may be present in particulate form or as a solute. Current sampling procedures do not allow separate analyses of particulates and solutes. For its Secondary MCL, aluminum is subject to a range of concentrations from 50 ug/L to 200 ug/L, depending on the ability of a water system to remove the metal from water undergoing treatment. The EPD laboratory's reporting level for the metal, 60 ug/L lies within the Secondary MCL range, placing any sample with detectable aluminum within the MCL range.

The metal appears to be most abundant in water samples with acidic pHs and, as a rule, is more concentrated the higher the acidity. The Miocene/Recent aquifer system, updip portions of the Cretaceous/Providence aquifer system, and updip terrigenous clastic-rich portions of the Clayton aquifer are examples. Aquifers giving mildly basic samples such as the carbonate hosted Floridan aquifer and carbonate portions of the Valley and Ridge/Appalachian Plateau aquifers produce few sample waters containing any detectable aluminum. The metal's abundance in bedrock waters from the Piedmont Blue Ridge aquifer system seems also low. Samples from deeper wells with more strongly basic pHs (approaching 8.00) may contain some detectable aluminum.

4.3.2 Iron and Manganese

Iron and manganese are also two more naturally occurring metals in Georgia's groundwater. Both, like aluminum, may occur as fine particulates or as solutes. Both seem more abundant in acidic waters. Manganese also seems more abundant in waters with low dissolved oxygen contents. Sand units (e.g., the Cretaceous and updip Clayton) and shallower igneous/metamorphic bedrock give waters with the highest iron or manganese concentrations. Waters with the lowest concentrations are drawn from carbonate units (e.g., the Floridan and the carbonates in the Valley and Ridge/ Appalachian Plateau province), which also usually have the higher pH waters.

4.3.3 Calcium, Magnesium, Sodium, and Potassium

Calcium is most abundant in sample waters from the Jacksonian aquifer. Sample waters from the Floridan and the Piedmont/Blue Ridge aquifer systems also contain high calcium levels. The metal could be considered least abundant in samples from the Cretaceous/Providence aquifer system. Only three, updip samples are available from the Clayton aquifer, making this lowest average calcium content hardly representative.

Magnesium appears most abundant in the Valley and Ridge/Appalachian Plateau aquifer system and least abundant in the Cretaceous/Providence system.

Detectable sodium is nearly ubiquitous. The metal is most abundant in waters from the Floridan and the Piedmont/Blue Ridge and least so in waters from the more updip Cretaceous.

The testing method used by the EPD laboratory to analyze for potassium is not very sensitive (reporting limit 5,000 ug/L), therefore detectable potassium was found in only eight samples from five stations – two samples from two stations in the Miocene, two samples from two stations in the Floridan and four samples from one station in the Piedmont/Blue Ridge.

Kellam and Gorday (1990) observed that Ca/Mg ratios are highest in the Floridan where recharge areas are closest. Their observation also applies to the Floridan in this study, and a wide range of Ca/Mg ratios from indefinitely large (division by zero or a very small number) to 1.2 exists. However, for carbonate or carbonate-bearing aquifer media in the Valley and Ridge/Appalachian Plateau, the Jacksonian, the Claiborne, the Miocene/Surficial aquifers and aquifer systems the rule does not seem to apply. The ratios seem to cluster around 2.00 for the Valley and Ridge/Appalachian Plateau samples, and to range from 23.0 up to indefinitely large for the Jacksonian. The low number of sampling stations situated in these other aquifers or aquifer systems might cause the differences between Floridan Ca/Mg ratios and ratios for the other aquifers and aquifer systems to be apparent.

4.4 ICPMS METALS

The ICPMS method works well for most trace metals. Sample waters undergoing testing by this method, as with the samples subject to ICP testing, were unfiltered. The EPD laboratory tested for the following trace metals: chromium, nickel, copper, zinc, arsenic, selenium, molybdenum, silver, cadmium, tin, antimony, barium, thallium and lead; uranium testing was performed by the Soil, Plant and Water Analysis Laboratory at the University of Georgia. Silver, cadmium, tin, antimony and thallium remained below detection in all samples. No metals analyzed under the ICPMS method registered any levels above the Primary or Secondary MCLs or action levels.

4.4.1 Chromium and Nickel

Detectable chromium occurred in one sample from one Cretaceous station. Nickel occurred in one sample from one Clayton station. These metals do occur naturally occasionally in the sedimentary rocks of the Floridan aquifer system. However, in this study the chromium and nickel occurrences were in the Cretaceous and Clayton aquifer systems and not the Floridan.

4.4.2 Arsenic, Selenium, Molybdenum and Uranium

Arsenic was detected in four samples from the Floridan (quarterly well PA23). The Floridan samples came from the Gulf Trough area of Grady County, the scene of other groundwater arsenic detections, some above the Primary MCL (10 ug/L) (Donahue et al., 2012). Selenium was found in samples from the Jacksonian, Miocene and Floridan aquifer systems (wells WAS1, MI10B and

PA9C). The element may accompany uranium in deposits formed from the reduction of oxic groundwaters. Twelve samples from three Floridan stations and one sample from one Piedmont station contained detectable molybdenum. The stations – PA23, PA28, and PA56 – are all Gulf Trough area wells. The lone sample to contain molybdenum in the Piedmont was from well BAN1A, which is a well that has had detectable uranium in the past. Like selenium, molybdenum can be associated with uranium in deposits formed through the reduction of oxic groundwaters (Turner-Peterson and Hodges, 1986). Uranium appears to be most abundant in the Piedmont/Blue Ridge, with five stations giving eight samples containing detectable uranium. Uranium detections were down from previous years due to the reporting limit of the lab going from the previous 1.0 ug/L to 10 ug/L. Uranium minerals, sometimes accompanied by molybdenum and selenium minerals, can precipitate from oxic groundwaters subjected to strong reduction.

4.4.3 Copper, Lead, and Zinc

Copper, lead, and zinc detections are more numerous in acidic samples. Copper and lead did not exceed their action level nor zinc its Secondary MCL in any samples. Out of a total of 188 samples taken for the study, 41 samples with pHs below 7.00 contained detectable amounts of at least one of these metals. In contrast, only 15 samples with basic pHs contained detectable amounts of any of these metals. Past experiences where two samples, each drawn from a different spigot, had different copper, zinc, and lead values, suggest that these metals are, at least in part, derived from plumbing. Therefore, the copper, lead, and zinc levels in the samples are not necessarily representative of those in the ambient groundwater.

4.4.4 Barium

A possible effect of the sensitivity of the testing method, barium detections occur in almost every sample. Because, perhaps, nearby barite deposits and associated mining and processing activities greatly increased the barium level in groundwater at station VR6A, a sample from that station has caused the Valley and Ridge/Appalachian Plateau samples to have one of the highest average barium levels along with samples from the Floridan and Miocene/Surficial aquifer systems. Groundwater containing excessive barium (Primary MCL of 2,000 ug/L) has not been a problem since the in-town public well field, drawing from the Floridan at Fitzgerald, Ben Hill County, closed in 1995.

4.5 CONTAMINATION OCCURENCES

According to the Safe Drinking Water Act (Public Law 93-523, section 1401, Dec. 16, 1974) a “contaminant” is any “physical, chemical, biological, or radiological substance in water” – almost anything except water itself. Some contaminants can be innocuous or even beneficial; others can be undesirable or harmful.

Modeled after limits USEPA has established concerning the quality of water offered for public consumption, the State established limits on certain contaminants in water for public use (Table 4-1). Some contaminants may endanger health, if present in sufficient concentrations. Two types of limits apply to such contaminants. The first, the Primary MCL, imposes mandatory limits applying to treated water at the point of its production. The second, the action level, sets forth mandatory limits that regulate copper and lead contents and apply to water at the point where the consumer can partake of it.

Secondary MCLs (Table 4-1) are suggested limits established for substances imparting only unpleasant qualities to water. The unpleasant qualities include bad taste and staining ability -- such as with iron and manganese -- and cosmetic effects -- such as with silver.

4.5.1 Primary MCL and Action Level Exceedances

One well and one spring produced samples with substances that exceeded Primary MCLs or action levels (Table 4-1). Mineral spring P12A gave four samples that exceeded the Primary MCL for fluoride (4 mg/L). The spring has, in the past, regularly given samples that fall in a range from 4 mg/L to a little above 5 ug/L fluoride. The fluoride is almost certainly natural.

Nitrate/nitrite exceeded its Primary MCL of 10 mg/L as nitrogen in well MI9A. The well, a former garden well, 22 feet deep and located adjacent to a row-crop field, has yielded water with excessive nitrate/nitrite before.

4.5.2 Secondary MCL Exceedances

Substances occurring in excess of Secondary MCLs (Table 4-1) consisted of manganese, aluminum, iron, sulfate, and chloride. Manganese, aluminum, and iron are common naturally occurring metals in Georgia's groundwater.

Manganese equaled or exceeded its MCL in 36 samples from 22 wells. Five of the wells were quarterly (P21, P25, P35, P37 and PA34A); four gave four samples and one gave three of four samples with excessive manganese.

The Secondary MCL for aluminum is established as a range, varying from 50 ug/L to 200 ug/L. The range is designed to accommodate varying ability of water treatment facilities at removing aluminum from treated water. This is a consequence of a tradeoff between introducing into treated water coagulants, which contain soluble aluminum, versus impaired removal of suspended aluminum-bearing contaminants. The aluminum present in waters covered by this study is naturally occurring rather than introduced. Of additional note, water in shallow wells may experience an increase in suspended matter (turbidity) during prolonged rain events, which may result in an increased aluminum value because of suspended material. Aluminum excesses, those which exceeded the 50 ug/L level (most groundwater used for public consumption lacks measureable suspended matter),

were found in 17 samples from 15 wells. Aluminum excesses were the most consistent in the domestic bored Piedmont regolith well P33.

Iron exceeded its Secondary MCL in 23 samples from 23 wells. Iron is another common naturally occurring contaminant in Georgia's groundwater. One of the wells was quarterly well P33 which had detectable iron in one of the quarterly samples. Well P33 is a shallow bored well and sample water from this well is typically murky with suspended particulates.

Well P32 gave four samples with excessive sulfate and well PA9C gave a sample with excessive sulfate and excessive chloride.

4.5.3 Volatile Organic Compounds

Trihalomethanes are the most common of the VOCs detected (Table 4-2). Chloroform, the most commonly detected of the VOCs, was present in five samples from five stations. Chlorodibromomethane was the next most common trihalomethane with one detection from one station. In groundwater, these compounds originate as by-products when halogenous disinfectants react with naturally-occurring organic matter present in the water. The disinfectants are introduced to the water through cleaning processes incident to well maintenance or through leaky check valves or foot valves allowing treated water down a well during normal operation.

One station (VR6A) gave a sample containing detectable tetrachloroethylene and 1,1-dichloroethylene. Well VR6A, an industrial process water well, is in an industrial area and is within about two miles of former and current landfills. The former landfills utilized unlined exhausted barite pits. Cressler et al. (1979) had warned of the danger of using these sorts of pits for waste disposal in the Cartersville area because of the karstic bedrock. However, the source of the VOCs at station VR6A is uncertain.

Well COU4 gave a sample with a detection of MTBE, a fuel additive, and spring PA59 gave a sample with a trichloroethylene and cis 1,2 dichloroethylene detection. Trichloroethylene and 1,2 dichloroethylene are commonly used as solvents or degreasers for metal parts, as dry-cleaning solvents and in the manufacturing of a range of fluorocarbon refrigerants.

Table 4-1. Contaminant Exceedances, Calendar Year 2017.

Station	Contaminant	MCL	Type Source	Date Sampled
<i>Primary MCL and Copper/Lead Action Level Exceedances</i>				
MI9A	Nitrate/nitrite = 19 mg/L as N	10 mg/L	domestic well	07/05/17
P12A	Fluoride = 4.5 mg/L	4 mg/L	mineral spring	02/08/17
P12A	Fluoride = 4.7 mg/L	4 mg/L	mineral spring	05/03/17
P12A	Fluoride = 4.7 mg/L	4 mg/L	mineral spring	08/02/17
P12A	Fluoride = 4.7 mg/L	4 mg/L	mineral spring	11/15/17
<i>Secondary MCL Exceedances</i>				
COU3	Manganese = 360 ug/L	50 ug/L	public well	08/15/17
COU4	Manganese = 340 ug/L	50 ug/L	public well	08/01/17
WAS3	Manganese = 270 ug/L	50 ug/L	public well	02/22/17
COU1	Manganese = 170 ug/L	50 ug/L	public well	08/01/17
MAD1	Manganese = 140 ug/L	50 ug/L	public well	05/18/17
SUM2	Manganese = 140 ug/L	50 ug/L	public well	01/24/17
P37	Manganese = 140 ug/L	50 ug/L	public well	01/25/17
P37	Manganese = 140 ug/L	50 ug/L	public well	04/05/17
P35	Manganese = 140 ug/L	50 ug/L	domestic well	01/25/17
P35	Manganese = 130 ug/L	50 ug/L	domestic well	04/05/17
P35	Manganese = 130 ug/L	50 ug/L	domestic well	07/06/17
P35	Manganese = 130 ug/L	50 ug/L	domestic well	10/11/17
HAS1	Manganese = 130 ug/L	50 ug/L	public well	05/17/17
P37	Manganese = 130 ug/L	50 ug/L	public well	10/11/17
P37	Manganese = 120 ug/L	50 ug/L	public well	07/06/17
PA34A	Manganese = 110 ug/L	50 ug/L	public well	03/21/17
PA34A	Manganese = 97 ug/L	50 ug/L	public well	12/06/17
PA34A	Manganese = 96 ug/L	50 ug/L	public well	06/08/17

Table 4-1. Contaminant Exceedances, Calendar Year 2017.

Station	Contaminant	MCL	Type Source	Date Sampled
<i>Secondary MCL Exceedances Continued</i>				
PA34A	Manganese = 96 ug/L	50 ug/L	public well	09/19/17
P25	Manganese = 95 ug/L	50 ug/L	public well	02/08/17
MI10B	Manganese = 92 ug/L	50 ug/L	domestic well	07/05/17
P25	Manganese = 88 ug/L	50 ug/L	public well	05/03/17
WAY1	Manganese = 82 ug/L	50 ug/L	public well	10/25/17
J5	Manganese = 77 ug/L	50 ug/L	public well	09/26/17
JEF1	Manganese = 74 ug/L	50 ug/L	domestic well	03/09/17
COU2	Manganese = 73 ug/L	50 ug/L	public well	08/01/17
P21	Manganese = 72 ug/L	50 ug/L	public well	05/03/17
P21	Manganese = 71 ug/L	50 ug/L	public well	08/02/17
P20	Manganese = 66 ug/L	50 ug/L	public well	07/19/17
PA18	Manganese = 65 ug/L	50 ug/L	public well	03/09/17
P25	Manganese = 63 ug/L	50 ug/L	public well	08/02/17
P25	Manganese = 62 ug/L	50 ug/L	public well	11/15/17
CL4A	Manganese = 60 ug/L	50 ug/L	public well	04/18/17
PA16	Manganese = 55 ug/L	50 ug/L	public well	03/09/17
CL8	Manganese = 53 ug/L	50 ug/L	public well	04/18/17
P21	Manganese = 50 ug/L	50 ug/L	public well	11/15/17
GLA1	Aluminum=1,200ug/L	50-200 ug/L	public well	02/22/17
SUM2	Aluminum=1,100ug/L	50-200 ug/L	public well	01/24/17
K12	Aluminum = 430 ug/L	50-200 ug/L	public well	01/11/17
K9A	Aluminum = 300 ug/L	50-200 ug/L	public well	01/11/17
PA57	Aluminum = 260 ug/L	50-200 ug/L	public well	10/11/17
P33	Aluminum = 230 ug/L	50-200 ug/L	domestic well	01/25/17
VR2A	Aluminum = 230 ug/L	50-200 ug/L	public well	05/02/17

Table 4-1 Continued. Contaminant Exceedances, Calendar Year 2017.

Station	Contaminant	MCL	Type Source	Date Sampled
<i>Secondary MCL Exceedances Continued</i>				
P33	Aluminum = 180 ug/L	50-200 ug/L	domestic well	04/06/17
ELB1	Aluminum = 180 ug/L	50-200 ug/L	public well	01/25/17
MI2A	Aluminum = 170 ug/L	50-200 ug/L	domestic well	07/05/17
P37	Aluminum = 120 ug/L	50-200 ug/L	public well	07/06/17
CT8	Aluminum = 110 ug/L	50-200 ug/L	domestic well	04/18/17
P23	Aluminum = 100 ug/L	50-200 ug/L	public well	08/02/17
MI9A	Aluminum = 100 ug/L	50-200 ug/L	domestic well	03/05/17
P30	Aluminum = 94 ug/L	50-200 ug/L	domestic well	05/17/17
P25	Aluminum = 86 ug/L	50-200 ug/L	public well	11/15/17
P33	Aluminum = 78 ug/L	50-200 ug/L	domestic well	07/06/17
MI10B	Iron = 3,500 ug/L	300 ug/L	domestic well	07/05/17
CL4A	Iron = 2,300 ug/L	300 ug/L	public well	04/18/17
COU3	Iron = 2,100 ug/L	300 ug/L	public well	08/15/17
CHT1	Iron = 1,900 ug/L	300 ug/L	public well	10/12/17
SUM2	Iron = 1,600 ug/L	300 ug/L	public well	01/24/17
FAY118.8	Iron = 1,500 ug/L	300 ug/L	public well	06/07/17
PA9C	Iron = 1,300 ug/L	300 ug/L	former test	08/16/17
STW1	Iron = 1,200 ug/L	300 ug/L	public well	10/12/17
MAC1	Iron = 1,100 ug/L	300 ug/L	public well	03/22/17
COU1	Iron = 1,000 ug/L	300 ug/L	public well	08/01/17
STW2	Iron = 870 ug/L	300 ug/L	public well	10/12/17
LIB2	Iron = 870 ug/L	300 ug/L	public well	06/22/17
K3	Iron = 860 ug/L	300 ug/L	public well	03/07/17
GLY2	Iron = 730 ug/L	300 ug/L	public well	08/16/17
FRA1	Iron = 620 ug/L	300 ug/L	public well	05/18/17

Table 4-1 Continued. Contaminant Exceedances, Calendar Year 2017.

Station	Contaminant	MCL	Type Source	Date Sampled
<i>Secondary MCL Exceedances Continued</i>				
P37	Iron = 600 ug/L	300 ug/L	public well	07/06/17
MAD1	Iron = 590 ug/L	300 ug/L	public well	05/18/17
CL8	Iron = 560 ug/L	300 ug/L	public well	04/18/17
WHI1	Iron = 410 ug/L	300 ug/L	public well	05/03/17
VR2A	Iron = 390 ug/L	300 ug/L	public well	05/02/17
P23	Iron = 370 ug/L	300 ug/L	public well	08/02/17
P33	Iron = 370 ug/L	300 ug/L	domestic well	10/11/17
P39	Iron = 310 ug/L	300 ug/L	public well	09/26/17
P32	Sulfate = 380 mg/L	250 mg/L	domestic well	07/06/17
P32	Sulfate = 320 mg/L	250 mg/L	domestic well	10/11/17
P32	Sulfate = 320 mg/L	250 mg/L	domestic well	01/25/17
P32	Sulfate = 290 mg/L	250 mg/L	domestic well	04/06/17
PA9C	Sulfate = 260 mg/L	250 mg/L	former test	08/16/17
PA9C	Chloride = 750 mg/L	250 mg/L	former test	08/16/17

(The alphabetic prefix in a station number indicates the aquifer/aquifer system tapped: CL=Claiborne, J=Jacksonian, K=Cretaceous, P=Piedmont/Blue Ridge, PA=Floridan, CT=Clayton, VR=Valley and Ridge, M=Miocene)

Table 4-2. VOC Detection Incidents, Calendar Year 2017.

Station	Constituents	Primary MCL	Type Source	Date Sampled
GWN-J4	chlorodibromomethane = 0.67 ug/L	See note (Page A-31)	public	03/07/17
GWN-P22	chloroform = 1.3 ug/L	See note (Page A-31)	domestic	07/19/17
GWN-PA32	chloroform = 28 ug/L	See note (Page A-31)	public	04/20/17
GWN-MI2A	chloroform = 1.7 ug/L	See note (Page A-31)	domestic	07/05/17
GWN-SUM2	chloroform = 0.53 ug/L	See note (Page A-31)	public	01/24/17
GWN-PA59	cis 1,2-dichloroethylene = 0.50 ug/L	70 ug/L	public	04/19/17
	trichloroethylene = 0.70 ug/L	5 ug/L		
GWN-COU4	MTBE = 0.98 ug/L	No MCL	public	08/01/17
GWN-UPS1	chloroform = 1.1 ug/L	See note (Page A-31)	public	05/17/17
GWN-VR6A	1,1 dichloroethylene = 1.3 ug/L	7 ug/L	industrial	05/02/17
	tetrachloroethylene = 1.9 ug/L	5 ug/L		

4.6 GENERAL QUALITY

A review of the analyses of the water samples collected during calendar year 2017 indicates that the chemical quality of groundwater sampled for most of the Groundwater Monitoring Network stations is quite good.

However, as mentioned in Chapter 1, areas of elevated risk for low-quality groundwater exist:

- 1) Valley and Ridge/Appalachian Plateau Province – surface influence;
- 2) Piedmont/Blue Ridge Province – in areas excluding the eastern metavolcanic terranes - uranium;
- 3) Coastal Plain agricultural areas – high nitrate/nitrite;
- 4) Coastal Plain, Dougherty Plain – surface influence;
- 5) Coastal Plain, Gulf Trough – high total dissolved solids, especially sulfate – high radionuclides, high barium, high arsenic;
- 6) Coastal Plain, Atlantic coast area – saline water influx.

CHAPTER 5 LIST OF REFERENCES

- Applied Coastal Research Laboratory, Georgia Southern University, 2002, Gulf Trough and Satilla Line Data Analysis, Georgia Geologic Survey Project Report 48, 14 p., 1 pl.
- Brooks, R., Clarke, J.S. and Faye, R.E., 1985, Hydrology of the Gordon Aquifer System of East-Central Georgia: Georgia Geologic Survey Information Circular 75, 41 p., 2 pl.
- Clarke, J.S., Faye, R.E., and Brooks, R., 1983, Hydrogeology of the Providence Aquifer of Southwest Georgia: Georgia Geologic Survey Hydrologic Atlas 11, 5 pl.
- Clarke, J.S., Faye, R.E., and Brooks, R., 1984, Hydrogeology of the Clayton Aquifer of Southwest Georgia: Georgia Geologic Survey Hydrologic Atlas 13, 6 pl.
Midville Aquifer Systems of East Central Georgia: Georgia Geologic Survey Information Circular 74, 62p., 2 pl.
- Clarke, J.S., Brooks, R., and Faye, R.E., 1985, Hydrogeology of the Dublin and Midville Aquifer Systems of East Central Georgia: Georgia Geologic Survey Information Circular 74, 62 p., 2 pl.
- Clarke, J.S., Hacke, C.M., and Peck, M.F., 1990, Geology and Ground-Water Resources of the Coastal Plain of Georgia: Georgia Geologic Survey Bulletin 113, 116 p., 12 pl.
- Clarke, J.S., Falls, W.F., Edwards, L.E., Fredriksen, N.O., Bybell, L.M., Gibson, T.G., Gohn, G.S., and Fleming, F., 1996, Hydrogeologic Data and Aquifer Interconnection in a Multi-Aquifer System in Coastal Plain Sediments Near Millhaven, Screven County, Georgia: Georgia Geologic Survey Information Circular 99, 49 p., 1 pl.
- Cressler, C.W., Franklin, M.A., and Hester, W.G., 1976, Availability of Water Supplies in Northwest Georgia: Georgia Geologic Survey Bulletin 91, 140 p.
- Cressler, C.W., Blanchard, Jr., H.E., and Hester, W.G., 1979, Geohydrology of Bartow, Cherokee, and Forsyth Counties, Georgia: Georgia Geologic Survey Information Circular 50, 45 p., 5 pl.
- Crews, P.A. and Huddlestun, P.F., 1984, Geologic Sections of the Principal Artesian Aquifer System, in Hydrogeologic Evaluation for Underground Injection Control in the Coastal Plain of Georgia: Georgia Geologic Survey Hydrologic Atlas 10, 41 pl.

- Davis, K.R., Donahue, J.C., Hutcheson, R.H., and Waldrop, D.L., 1989, Most Significant Ground-Water Recharge Areas of Georgia: Georgia Geologic Survey Hydrologic Atlas 19, 1 pl.
- Davis, K.R., 1990, Water Quality in Georgia for 1988: Georgia Geologic Survey Circular 12E, 99 p.
- Daniel III, C.C., and Harned, D., 1997: Ground-Water Recharge to and Storage in the Regolith-Crystalline Rock Aquifer System, Guilford County, North Carolina: USGS Water Resources Investigations Report 97-4140, 65 p.
- Donahue, J.C., Kibler, S.R., and Chumbley, A.W., 2012, An Investigation of the Occurrence of Uranium in Ground Water in Georgia: Watershed Protection Branch Circular 12W, 105 p.
- Donahue, J.C., Kibler, S.R., and Chumbley, A.W., 2013, An Investigation of the Occurrence of Arsenic in Ground Water in the Gulf Trough Area of Georgia: Watershed Protection Branch Circular 12X, 69 p.
- EPD, 1991, A Ground-Water Management Plan for Georgia: Georgia Geologic Survey Circular 11 (1991 edition).
- EPD, 1998, A Ground-Water Management Plan for Georgia: Georgia Geologic Survey Circular 11 (1998 edition).
- EPD, 2009, State of Georgia Environmental Rule 391-3-5: Rules for Safe Drinking Water.
- Foyle, A.M., Henry, V.J., and Alexander, C.R., 2001, The Miocene Aquitard and the Floridan Aquifer of the Georgia/South Carolina Coast: Geophysical Mapping of Potential Seawater Intrusion Sites: Georgia Geologic Survey Bulletin 132, 61 p., 4 pl.
- Gaskin, J., Vendrell, P. F., and Atilas, J. H., 2003, Your Household Water Quality: Nitrate in Water. University of Georgia Cooperative Extension Service Circular 858-5, 1 p.
- Gorday, L.L., Lineback, J.A., Long, A.F., and McLemore, W.H., 1997, A Digital Model Approach to Water-Supply Management of the Claiborn, Clayton, and Providence Aquifers in Southwestern Georgia, Georgia Geologic Survey Bulletin 118, 31 p., Appendix, Supplements and II.
- Hayes, L.R., Maslia, M.L., and Meeks, W.C, 1983, Hydrology and Model Evaluation of the Principal Artesian Aquifer, Dougherty Plain, Southwest Georgia: Georgia Geologic Survey Bulletin 97, 93 p.

- Heath, R.C., 1980, Basic Elements of Ground-Water Hydrology with Reference to Conditions in North Carolina: USGS Open File Report 80-44, 87 p.
- Hetrick, J.H., 1990, Geologic Atlas of the Fort Valley Area: Georgia Geologic Survey Geologic Atlas 7, 2 pl.
- Hetrick, J.H., 1992, Geologic Atlas of the Wrens-Augusta Area: Georgia Geologic Survey Geologic Atlas 8, 3 pl.
- Hicks, D.W., Krause, Clarke, J.S., 1981, Geohydrology of the Albany Area, Georgia: Georgia Geologic Survey Information Circular 57, 31 p.
- Huddlestun, 1988, A Revision of the Lithostratigraphic Units of the Coastal Plain of Georgia: The Miocene through Holocene, Georgia Geologic Survey Bulletin 104, 162 p., 3 pl.
- Huddlestun, P.F., 1993, A Revision of the Lithostratigraphic Units of the Coastal Plain of Georgia: the Oligocene: Georgia Geologic Survey Bulletin 104, 152 p. 5 pl.
- Huddlestun, P.F., and Summerour, J., H., 1996, The Lithostratigraphic Framework of the Uppermost Cretaceous and Lower Tertiary of Burke County, Georgia: Georgia Geologic Survey Bulletin 127, 94 p., 1 pl.
- Kellam, M.F., and Gorday, L.L., 1990, Hydrogeology of the Gulf Trough- Apalachicola Embayment Area, Georgia: Georgia Geologic Survey Bulletin 94, 74 p., 15 pl.
- Krause, R.E., 1979, Geohydrology of Brooks, Lowndes, and Western Echols Counties, Georgia: United States Geological Survey Water-Resources Investigations 78-117, 48 p., 8 pl.
- Krause, R.E., and Clarke, J.S., 2001, Coastal Ground Water at Risk – Saltwater Contamination at Brunswick, Georgia, and Hilton Head Island, South Carolina: United States Geological Survey Water-Resources Investigations Report 01-4107, 1 pl.
- Long, A.F., 1989, Hydrogeology of the Clayton and Claiborne Aquifer Systems: Georgia Geologic Survey Hydrologic Atlas 19, 6 pl.
- McFadden, S.S., and Perriello, P.D., 1983, Hydrogeology of the Clayton and Claiborne Aquifers of Southwestern Georgia: Georgia Geologic Survey Information Circular 55, 59 p., 2 pl.

- Madison, R.J., and Brunett, J.O., 1984, Overview of the Occurrence of Nitrate in Ground Water of the United States in National Water Summary 1984 - Hydrologic Events, Selected Water-Quality Trends, and Ground-Water Resources: United States Geological Survey Water Supply Paper 2275, p. 93-105.
- O'Connell, D.B., and Davis, K.R., 1991, Ground-Water Quality in Georgia for 1989: Georgia Geologic Survey Circular 12F, 115 p.
- Turner-Peterson, C.E. and Hodges, C. A., 1986, Descriptive Model of Sandstone U, Model 30c, in Mineral Deposit Models: Deposits in Clastic Sedimentary Rocks, Cox, D.P. and Singer, D. E., eds., USGS Bulletin 1693, on-line pdf. publication.
- Pollard, L.D., and Vorhis, R.C., 1980, The Geology of the Cretaceous Aquifer System in Georgia: Georgia Geologic Survey Hydrologic Atlas 3, 5 pl.
- Summerour, J.H., Shapiro, E.A., Lineback, J.A., Huddleston, P.F., and Hughes, A.C., 1994, An Investigation of Tritium in the Gordon and Other Aquifers in Burke County, Georgia: Georgia Geologic Survey Information Circular 95, 93 p.
- Tuohy, M. A., 1984, Isopach Map of the Claiborne Aquifer, in Hydrogeologic Evaluation for Underground Injection Control in the Coastal Plain of Georgia: Georgia Geologic Survey Hydrologic Atlas 10, 41 pl.
- Vincent, R.H., 1982, Geohydrology of the Jacksonian Aquifer in Central and East Central Georgia: Georgia Geologic Survey Hydrologic Atlas 8, 3 pl.
- Williams, L.J., 2007, Hydrology and Potentiometric Surface of the Dublin and Midville Aquifer Systems in Richmond County, Georgia, January 2007: U.S. Geological Survey Scientific Investigations Map 2983, 1 sheet.

LABORATORY AND STATION DATA

Tables A-1 through A-8 list the values for both laboratory parameters and field parameters for each well or spring. The following abbreviations are used on these tables:

Parameters and Units of Measure

Cl	= chloride	ND	= not detected
cond.	= conductivity	NG	= not given
diss O2	= dissolved oxygen	NOx	= nitrate/nitrite
F	= fluoride	P	= total phosphorus
ICP	= inductively coupled plasma (emission) spectroscopy	SO4	= sulfate
ICPMS	= inductively coupled plasma/mass spectrometry	Temp.	= temperature
mg/L	= milligrams per liter	ug/L	= micrograms per liter
mgN/L	= milligrams per liter as nitrogen	uS/cm	= microSiemenses per centimeter
NA	= not available; not analyzed	VOC	= volatile organic compound

Volatile Organic Compounds

1,1dce	= 1,1-dichloroethylene	mdcb	= m-dichlorobenzene
bdcM	= bromodichloromethane	odcb	= o-dichlorobenzene
dbcm	= dibromochloromethane	pdcb	= p-dichlorobenzene
pce	= tetrachloroethylene	tbm	= bromoform
cb	= chlorobenzene	tcm	= chloroform
MTBE	= methyl tert-butyl ether	tce	= trichloroethylene

Table A-9 gives the reporting limits for the various analytes. The abbreviations used for Tables A-1 through A-8 also apply to Table A-9.

**Table A-1. Groundwater Quality Analyses for Cretaceous/Providence Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date samples	pH	cond. uS/cm	dis. O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NO3 mg N/L	P mg/L
GWN-K3 Washington	Sandersonville Well #7B	697	NG	NG	03/07/17	5.88	111	2.82	21.70	ND	NA	ND	10	ND	0.12
GWN-K3 Twiggs	Kalbin Well #6	400	NG	NG	08/28/17	4.75	53	2.61	19.88	ND	NA	ND	ND	0.03	ND
GWN-K7 Jones	Jones County #4	128	NG	NG	08/08/17	4.88	31	6.48	17.97	ND	NA	ND	ND	0.82	ND
GWN-K9A Macon	Marshallville Well #2	550	NG	NG	01/11/17	4.28	50	NA	18.48	ND	NA	ND	11	0.03	ND
GWN-K10B Peach	Fort Valley Well #6	600	NG	NG	01/11/17	5.07	21	9.98	17.99	ND	NA	ND	ND	0.73	ND
GWN-K11A Houston	Werner Robins Well #2	540	NG	NG	08/08/17	4.28	27	7.33	19.99	ND	NA	ND	ND	1.10	ND
GWN-K12 Houston	Perry/Holiday Inn Well	550	NG	NG	01/11/17	4.25	50	0.60	19.67	ND	NA	ND	11	ND	ND
GWN-K19 Richmond	Henrichs/Murphy Street Well	484	NG	NG	08/01/17	4.40	19	8.13	19.68	ND	NA	ND	ND	0.10	0.02
GWN-K20 Sumter	Plasma Well #7	1000	NG	NG	04/18/17	7.63	124	2.42	28.39	ND	NA	ND	ND	ND	0.15
GWN-BUR2 Burke	Keyeville #1	NG	NG	NG	02/22/17	4.55	16	8.17	20.54	ND	NA	ND	ND	0.05	ND
GWN-CHT1 Chatham/Chocoma	Camp Darby Well	NG	NG	NG	10/12/17	5.25	53	0.33	21.61	ND	NA	ND	11	ND	0.06
GWN-GLA1 Glenncock	Mitchell #3	NG	NG	NG	02/22/17	4.30	45	8.57	19.90	ND	NA	ND	ND	2.20	ND
GWN-MAC1 Macon	Whitewater Creek PK #1	NG	NG	NG	03/22/17	5.11	62	0.41	20.11	ND	NA	ND	ND	ND	1.10
GWN-MAR1 Marion	Unimin #1	150	NG	NG	03/22/17	4.68	128	2.20	20.30	ND	NA	ND	33	0.34	ND
GWN-STW1 Stewart	Louville Community Well	NG	NG	NG	10/12/17	4.55	32	0.33	18.75	ND	NA	ND	ND	ND	ND
GWN-TAL1 Talbot	Junction City Well #2	300	NG	NG	03/22/17	7.92	212	0.11	21.53	ND	NA	ND	37	ND	ND
GWN-PD2A Webster	Preston Well #4	205	NG	NG	01/24/17	4.72	41	8.53	19.38	ND	NA	ND	ND	2.10	0.02

**Table A-1. Groundwater Quality Analyses for Cretaceous Stations.
Part B: Metals.**

Station No. County	Chro- mium ug/L	Nick- el ug/L	Cop- per ug/L	Zinc ug/L	Arsenic ug/L	Selen- ium ug/L	Molyb- denum ug/L	Silver ug/L	Cad- mium ug/L	Tin ug/L	Anti- mony ug/L	Barium ug/L	Thi- llium ug/L	Lead ug/L	Ura- nium ug/L	Alum- inum ug/L	Beryl- lium ug/L	Calcium ug/L	Co- balt ug/L	Iron ug/L	Potas- sium ug/L	Magne- sium ug/L	Manga- nese ug/L	Sodium ug/L	Thi- um ug/L	Van- adium ug/L
GWN-K3 Washington	ND	ND	6.6	34	ND	ND	ND	ND	ND	ND	ND	25	ND	ND	NA	ND	ND	18,000	ND	880	ND	1,600	37	2,200	ND	ND
GWN-K6 Tawiggs	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	19	ND	ND	NA	ND	ND	4,800	ND	150	ND	ND	ND	3,300	ND	ND
GWN-K7 Jones	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	19.0	ND	ND	NA	ND	ND	2,200	ND	ND	ND	ND	16	2,300	ND	ND
GWN-K8A Macon	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	3.9	ND	1.5	NA	300	ND	ND	ND	280	ND	ND	ND	1,100	ND	ND
GWN-K10B Peach	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	7.7	ND	ND	NA	ND	ND	ND	ND	22	ND	ND	ND	1,300	ND	ND
GWN-K11A Houston	ND	ND	12	16	ND	ND	ND	ND	ND	ND	ND	8.1	ND	ND	NA	ND	ND	ND	ND	ND	ND	ND	ND	2,200	ND	ND
GWN-K12 Houston	ND	ND	25	30	ND	ND	ND	ND	ND	ND	ND	6.4	ND	7.8	NA	430	ND	ND	ND	200	ND	ND	17	1,200	ND	ND
GWN-K19 Richmond	ND	ND	5.4	ND	ND	ND	ND	ND	ND	ND	ND	7.1	ND	1.3	NA	ND	ND	ND	ND	ND	ND	ND	ND	1,300	ND	ND
GWN-K20 Sumter	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	4,100	ND	ND	ND	ND	ND	25,000	ND	ND
GWN-BUF2 Burke	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	8.2	ND	ND	NA	ND	ND	ND	ND	21	ND	ND	ND	1,300	ND	ND
GWN-CHT1 Chatham/Chocoma	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	76	ND	ND	NA	ND	ND	3,200	ND	1,900	ND	1,200	23	1,400	ND	ND
GWN-GLA1 Glascok	ND	ND	11	26	ND	ND	ND	ND	ND	ND	ND	16	ND	1.1	NA	1,200	ND	3,500	ND	24	ND	1,200	ND	5,000	ND	ND
GWN-MAC1 Macon	ND	ND	ND	11	ND	ND	ND	ND	ND	ND	ND	46	ND	ND	NA	ND	ND	6,700	ND	1,100	ND	ND	18	2,000	ND	ND
GWN-MAR1 Marion	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.7	ND	ND	NA	ND	ND	ND	ND	ND	ND	ND	ND	25,000	ND	ND
GWN-STW1 Stewart	ND	ND	ND	18	ND	ND	ND	ND	ND	ND	ND	38	ND	ND	NA	ND	ND	ND	ND	1,200	ND	ND	17	1,700	ND	ND
GWN-TAL1 Talbot	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	4.3	ND	ND	NA	ND	ND	14,000	ND	ND	ND	ND	13	34,000	ND	ND
GWN-PDZA Webster	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	21	ND	ND	NA	ND	ND	3,800	ND	24	ND	1,100	ND	1,400	ND	ND

**Table A-1. Groundwater Quality Analyses for Cretaceous/Providence Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No.	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date Sampled	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NO3 mg/L	P mg/L
GWN-PD3 Clay	Fort Gaines Well #2	456	NG	NG	06/07/17	8.14	380	0.48	21.70	ND	NA	10	ND	ND	0.03
GWN-PD6 Early	Blahely Well #4	1025	NG	NG	03/08/17	7.56	342	0.24	23.38	ND	NA	ND	13	ND	0.02
GWN-STW2 Stewart	Providence Canyon SP Well	NG	NG	NG	10/12/17	6.52	160	NA	21.23	ND	NA	ND	11	ND	0.15
GWN-WEB1 Webster	Weston Well #1	NG	NG	NG	01/24/17	6.88	313	3.13	19.08	ND	NA	ND	ND	0.37	0.04
	Aquifer Low Range					4.25	18	0.11	17.97				ND	ND	ND
	Aquifer High Range					8.14	360	8.86	28.39				37	2.20	1.10
	Aquifer Median (ND=0)					4.75	53	2.61	19.89				ND	0.03	ND
	Aquifer Mean (ND=0)					5.48	107	3.83	20.53				7	0.37	0.08

**Table A-1. Groundwater Quality Analyses for Cretaceous Stations.
Part B: Metals.**

Station No.	Chromium ug/L	Nickel ug/L	Copper ug/L	Zinc ug/L	Arsenic ug/L	Selenium ug/L	Molybdenum ug/L	Silver ug/L	Cadmium ug/L	Tin ug/L	Antimony ug/L	Barium ug/L	Thallium ug/L	Lead ug/L	Uranium ug/L	Aluminum ug/L	Beryllium ug/L	Calcium ug/L	Cobalt ug/L	Iron ug/L	Potassium ug/L	Magnesium ug/L	Manganese ug/L	Sodium ug/L	Vanadium ug/L
GWN-PD3 Clay	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	5.1	ND	ND	NA	ND	ND	5,900	ND	20	ND	1,200	ND	81,000	ND
GWN-PD6 Early	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	7.3	ND	ND	NA	ND	ND	7,900	ND	ND	ND	4,100	ND	68,000	ND
GWN-STW2 Stewart	ND	ND	ND	19	ND	ND	ND	ND	ND	ND	ND	7.1	ND	ND	NA	ND	ND	23,000	ND	870	ND	1,200	12	9,300	ND
GWN-MEB1 Webster	31	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	15	ND	ND	NA	ND	ND	64,000	ND	ND	ND	1,500	ND	1,800	ND
Aquifer Low Range												ND						ND		ND		ND	ND	1,100	
Aquifer High Range												78.0						64,000		1,900		4,100	37	81,000	
Aquifer Median (ND=0)												8.1						3,500		22		ND	ND	2,200	
Aquifer Mean (ND=0)												18.2						7,576		317		624	7	12,943	

**Table A-2. Groundwater Quality Analyses for Clayton Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampled	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg ML	P mg/L
GWN-CTB Schley	Wethersby House Well	80	NG	NG	04/19/17	4.43	42	9.07	18.46	ND	NA	ND	ND	1.40	ND
GWN-SUM1 Sumter	Brierpatch MHP Well #1	NG	NG	NG	01/24/17	4.35	77	8.04	19.66	ND	NA	11	ND	2.60	ND
GWN-SUM2 Sumter	Andersenville #1	230	NG	8	01/24/17	4.08	221	7.61	19.60	chloroform=0.53	NA	ND	80	0.36	ND
	Aquifer Low Range					4.08	42	7.61	18.46				ND	0.36	
	Aquifer High Range					4.43	221	9.07	19.60				80	2.60	
	Aquifer Median (ND=0)					4.35	77	8.04	19.66				ND	1.40	
	Aquifer Mean (ND=0)					4.29	113	8.24	19.31				27	1.45	

**Table A-2. Groundwater Quality Analyses for Clayton Stations.
Part B: Metals.**

Station No.	Chro- mium ug/L	Nick- el ug/L	Cop- per ug/L	Zinc ug/L	Arsen- ic ug/L	Selen- ium ug/L	Molyb- denum ug/L	Silver ug/L	Cad- mium ug/L	Tin ug/L	Ant- imony ug/L	Barium ug/L	Titan- ium ug/L	Lead ug/L	Ura- nium ug/L	Alumi- num ug/L	Beryl- lium ug/L	Calcium ug/L	Co- balt ug/L	Iron ug/L	Potas- sium ug/L	Magne- sium ug/L	Manga- nese ug/L	Sodium ug/L	Thi- urium ug/L	Vana- dium ug/L
GWN-CTB Schley	ND	ND	13	11	ND	ND	ND	ND	ND	ND	ND	18	ND	ND	NA	110	ND	ND	ND	ND	ND	ND	20	3,000	ND	ND
GWN-SUM1 Sumter	ND	ND	38	42	ND	ND	ND	ND	ND	ND	ND	14	ND	2.1	NA	ND	ND	ND	ND	34	ND	ND	19	12,000	ND	ND
GWN-SUM2 Sumter	ND	11	7.9	66	ND	ND	ND	ND	ND	ND	ND	100	ND	6.8	NA	1,100	ND	18,000	ND	1,600	ND	9,000	140	2,600	ND	ND
Aquifer Low Range												14						ND		ND		ND	19	2,600		
Aquifer High Range												100						18,000		1,600		9,000	140	12,000		
Aquifer Median (ND=0)												18						ND		34		ND	20	3,000		
Aquifer Mean (ND=0)												44						6,000		545		3,000	80	5,867		

**Table A-3. Groundwater Quality Analyses for Clalborne Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampled	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg N/L	P mg/L
GWN-CL2 Dooly	Unedika Well #3	315	315	24	01/11/17	7.44	205	4.38	18.59	ND	NA	ND	ND	0.49	ND
GWN-CLAA Sumter	Pisano Well #8	230	NG	NG	04/18/17	6.16	150	NA	18.93	ND	NA	ND	12	ND	0.37
GWN-CLB Dooly	Flint River Nursery Office Well	90	NG	NG	04/18/17	6.07	85	5.61	21.11	ND	NA	ND	ND	ND	0.53
	Aquifer Low Range					6.07	85	4.38	18.59				ND	ND	ND
	Aquifer High Range					7.44	205	5.61	21.11				12	0.49	0.53
	Aquifer Median (ND-0)					6.16	150	5.00	18.93				ND	ND	0.37
	Aquifer Mean (ND-0)					6.56	147	5.00	19.88				4	0.16	0.30

**Table A-3. Groundwater Quality Analyses for Claiborne Stations.
Part B: Metals.**

Station No.	Chro- mium ug/L	Nick- el ug/L	Cop- per ug/L	Zinc ug/L	Arse- nic ug/L	Selen- ium ug/L	Molyb- denum ug/L	Silver ug/L	Cad- mium ug/L	Tin ug/L	Anti- mony ug/L	Bari- um ug/L	Thal- ium ug/L	Lead ug/L	Ura- nium ug/L	Alumi- num ug/L	Bor- on ug/L	Calcium ug/L	Co- bal- t ug/L	Iron ug/L	Potas- sium ug/L	Magne- sium ug/L	Mange- nese ug/L	Sodium ug/L	Thi- um ug/L	Vane- dium ug/L
GWN-CL2 Doody	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	12	ND	ND	NA	ND	ND	40,000	ND	ND	ND	ND	ND	2,600	ND	ND
GWN-CL4A Sumter	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	11	ND	ND	NA	ND	ND	20,000	ND	2,300	ND	3,200	60	1,800	ND	ND
GWN-CLB Doody	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	40	ND	ND	NA	ND	ND	11,000	ND	560	ND	1,200	53	1,800	ND	ND
Aquifer Low Range												11					11,000		ND	ND	ND	ND	ND	1,800		
Aquifer High Range												40					40,000		2,300	2,300	3,200	60	2,600			
Aquifer Median (ND=0)												12					20,000		560	560	1,200	53	1,800			
Aquifer Mean (ND=0)												21					23,867		853	853	1,467	38	2,067			

**Table A-4. Groundwater Quality Analyses for Jacksonian Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampled	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg NL	P mg/L
GWN-J1B Jefferson	McNair House Well	-80	NG	NG	03/23/17	6.65	278	3.43	19.30	ND	NA	ND	ND	2.40	0.05
GWN-J4 Johnson	Wrightsville #4	520	NG	8	03/07/17	7.11	282	2.64	19.97	chlorodibromomethane-0.87	NA	ND	ND	0.69	0.03
GWN-J5 Ebleckley	Cochran #3	307	NG	NG	09/26/17	7.16	349	0.38	20.54	ND	NA	ND	12	ND	0.02
GWN-J6 Jefferson	Wrens #4	200	NG	NG	03/23/17	6.88	270	0.11	19.60	ND	NA	ND	13	ND	0.15
GWN-J8A Jefferson	Kain House Well II	100	NG	NG	03/23/17	7.02	301	0.15	18.40	ND	NA	ND	ND	0.04	0.03
GWN-J9 Jefferson	Henley 1 Louisville	175	NG	NG	10/26/17	7.82	179	6.74	19.44	ND	NA	ND	ND	1.80	ND
GWN-J10 Jefferson	Henley 2 Barlow	175	NG	NG	10/26/17	7.13	253	8.41	18.13	ND	NA	ND	ND	0.53	0.16
GWN-JEF1 Jefferson	Barlow #1	345	NG	NG	03/09/17	7.21	320	0.26	20.12	ND	NA	ND	ND	ND	0.04
GWN-WAS1 Washington	Harrison #1	680	NG	NG	03/07/17	7.03	288	3.04	20.00	ND	NA	ND	ND	0.32	0.04
GWN-WAS2 Washington	Ridgerville #1	NG	NG	NG	03/07/17	7.07	300	3.96	18.85	ND	NA	ND	ND	0.08	0.03
	Aquifer Low Range					6.65	278	0.11	18.13				ND	ND	ND
	Aquifer High Range					7.82	349	6.41	20.54				13	2.40	0.16
	Aquifer Median (ND=0)					7.08	285	2.84	19.66				ND	0.20	0.04
	Aquifer Mean (ND=0)					7.09	282	2.91	19.54				3	0.57	0.08

**Table A-4. Groundwater Quality Analyses for Jacksonian Stations.
Part B: Metals.**

Station No. County	Chro- mium ug/L	Nick- el ug/L	Cop- per ug/L	Zinc ug/L	Arsen- ic ug/L	Selen- ium ug/L	Molyb- denum ug/L	Silver ug/L	Cad- mium ug/L	Thi- um ug/L	Lead ug/L	Ure- num ug/L	Alumi- num ug/L	Ammon- ium ug/L	Calcium ug/L	Co- balt ug/L	Iron ug/L	Potas- sium ug/L	Magne- sium ug/L	Manga- nese ug/L	Sodium ug/L	Tita- nium ug/L	Vane- dium ug/L
GWN-J1B Jefferson	ND	ND	ND	18	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	49,000	ND	250	ND	ND	ND	4,800	ND	ND
GWN-J4 Johnson	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	52,000	ND	ND	ND	2,100	ND	3,000	ND	ND
GWN-J5 Bleckley	ND	ND	ND	15	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	70,000	ND	ND	ND	2,700	77	3,000	ND	ND
GWN-J8 Jefferson	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	53,000	ND	180	ND	1,800	ND	1,800	ND	ND
GWN-J8A Jefferson	ND	ND	6.3	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	64,000	ND	ND	ND	1,100	23	2,700	ND	ND
GWN-J8 Jefferson	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	35,000	ND	ND	ND	ND	ND	1,600	ND	ND
GWN-J10 Jefferson	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	48,000	ND	ND	ND	ND	ND	2,200	ND	ND
GWN-JEF1 Jefferson	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	61,000	ND	100	ND	2,300	74	3,200	ND	ND
GWN-WAS1 Washington	ND	ND	ND	ND	ND	5.8	ND	ND	ND	ND	ND	NA	ND	ND	53,000	ND	ND	ND	2,300	ND	3,100	ND	ND
GWN-WAS2 Washington	ND	ND	ND	19	ND	ND	ND	ND	ND	ND	ND	NA	ND	ND	58,000	ND	ND	ND	1,300	ND	2,500	ND	ND
Aquifer Low Range															35,000		ND		ND	ND	1,600		
Aquifer High Range															70,000		250		2,700	77	4,800		
Aquifer Median (ND=0)															53,000		ND		1,450	ND	2,850		
Aquifer Mean (ND=0)															54,300		51		1,340	17	2,780		

**Table A-5. Groundwater Quality Analyses for Floridan Stations.
Part A: Station Identification , Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampled	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg NL	P mg/L
GWN-PA2 Chatham	Savannah Well #13	1004	NG	NG	08/22/17	7.50	255	0.30	24.18	ND	NA	11	ND	ND	0.03
GWN-PA4 Chatham	Tybee Island Well #1	402	NG	NG	08/22/17	7.55	657	NA	23.13	ND	NA	41	130	ND	0.02
GWN-PA5 Liberty	Interstate Paper Well #1	810	NG	NG	08/21/17	7.55	318	4.48	24.80	ND	NA	ND	33	ND	0.02
GWN-PA8 Liberty	Hirewells Well #5	806	NG	NG	10/25/17	7.70	300	1.82	24.27	ND	NA	ND	24	ND	0.03
GWN-PABC Glynn	Miller Bell Park North East Well	1211	NG	NG	08/18/17	7.38	3,230	NA	24.64	ND	NA	750	280	ND	0.02
GWN-PA13 Ware	Waycross Well #3	775	NG	NG	04/20/17	8.38	410	1.28	25.97	ND	NA	14	48	0.08	0.02
GWN-PA14A Bulloch	Statesboro Well #4	413	NG	NG	03/21/17	7.79	248	NA	22.87	ND	NA	ND	ND	ND	0.03
					06/08/17	7.87	238	NA	23.09	ND	NA	ND	ND	ND	0.03
					08/19/17	8.02	250	NA	23.22	ND	NA	ND	ND	ND	0.03
					12/08/17	7.88	246	NA	21.48	ND	NA	ND	ND	ND	0.04
GWN-PA16 Jenkins	Millen Well #1	500	NG	NG	03/08/17	7.33	308	0.14	21.45	ND	NA	ND	ND	ND	0.03
GWN-PA17 Etowah	Sweineboro Well #7	280	NG	NG	03/08/17	7.40	257	4.25	21.15	ND	NA	ND	ND	0.04	0.02
GWN-PA18 Candler	Metter Well #2	540	NG	NG	03/08/17	7.80	227	0.15	22.33	ND	NA	ND	ND	ND	0.02
GWN-PA20 Lanier	Lakeland Well #2	340	NG	NG	04/20/17	7.72	388	0.37	22.16	ND	NA	ND	61	ND	0.07
GWN-PA22 Thomas	Thomasville Well #8	400	NG	NG	04/18/17	7.68	423	4.00	22.80	ND	NA	ND	67	0.24	0.02
GWN-PA23 Grady	Cairo #8	485	NG	NG	01/10/17	7.81	359	7.16	22.32	ND	NA	ND	37	ND	ND
					04/04/17	7.68	342	8.27	23.35	ND	NA	ND	33	ND	ND
					07/18/17	7.62	341	1.97	23.22	ND	NA	ND	28	ND	ND
					10/12/17	7.39	338	1.89	23.28	ND	NA	ND	28	ND	ND
GWN-PA25 Seminole	Donalsonville / 7th Street Well	174	NG	NG	03/08/17	7.07	313	4.82	21.34	ND	NA	ND	ND	1.70	ND
					08/07/17	7.08	302	4.81	21.25	ND	NA	ND	ND	1.80	ND
					09/27/17	7.22	302	5.04	21.37	ND	NA	ND	ND	1.70	ND
					12/08/17	7.19	311	5.15	21.14	ND	NA	ND	ND	1.70	ND

**Table A-5. Groundwater Quality Analyses for Floridan Stations.
Part B: Metals.**

Station No. County	Chro- mium ug/L	Nick- el ug/L	Cop- per ug/L	Zinc ug/L	Arsen- ic ug/L	Selen- ium ug/L	Molyb- denum ug/L	Silver ug/L	Cad- mium ug/L	Tin ug/L	Am- mony ug/L	Barium ug/L	Thal- lium ug/L	Lead ug/L	Ura- nium ug/L	Alum- inum ug/L	Beryl- lium ug/L	Calcium ug/L	Co- balt ug/L	Iron ug/L	Potas- sium ug/L	Magne- sium ug/L	Mange- nese ug/L	Sodium ug/L	Tita- nium ug/L	Vane- dium ug/L
GWN-PA2 Chatham	ND	ND	ND	ND	ND	ND	ND	8.6	ND	ND	ND	ND	ND	ND	ND	ND	ND	24,000	ND	ND	ND	11,000	ND	17,000	ND	ND
GWN-PA4 Chatham	ND	ND	ND	13	ND	ND	ND	8.1	ND	ND	ND	ND	ND	ND	ND	ND	ND	38,000	ND	ND	5,200	31,000	ND	54,000	ND	ND
GWN-PA5 Liberty	ND	ND	ND	ND	ND	ND	ND	31	ND	ND	ND	ND	ND	ND	ND	ND	ND	27,000	ND	ND	ND	17,000	ND	16,000	ND	ND
GWN-PA8 Liberty	ND	ND	ND	ND	ND	ND	ND	24	ND	ND	ND	ND	ND	ND	ND	ND	ND	27,000	ND	ND	ND	14,000	ND	14,000	ND	ND
GWN-PA9C Glynn	ND	ND	ND	ND	12	ND	ND	59	ND	ND	ND	ND	ND	ND	ND	ND	ND	120,000	ND	1,300	9,000	86,000	12	420,000	ND	ND
GWN-PA13 Ware	ND	ND	ND	ND	ND	ND	ND	69	ND	ND	ND	ND	ND	ND	ND	ND	ND	42,000	ND	ND	ND	19,000	ND	16,000	ND	ND
GWN-PA14A Bulloch	ND	ND	ND	ND	ND	ND	ND	4.5	ND	ND	ND	ND	ND	ND	ND	ND	ND	35,000	ND	ND	ND	7,400	ND	8,000	ND	ND
	ND	ND	ND	ND	ND	ND	ND	4.1	ND	ND	ND	ND	ND	ND	ND	ND	ND	33,000	ND	ND	ND	7,100	ND	7,800	ND	ND
	ND	ND	ND	ND	ND	ND	ND	4.3	ND	ND	ND	ND	ND	ND	ND	ND	ND	36,000	ND	21	ND	7,300	ND	8,000	ND	ND
	ND	ND	ND	ND	ND	ND	ND	6.7	ND	ND	ND	ND	ND	ND	ND	ND	ND	34,000	ND	ND	ND	6,900	ND	7,400	ND	ND
GWN-PA16 Jenkins	ND	ND	ND	ND	ND	ND	ND	4.6	ND	ND	ND	ND	ND	ND	ND	ND	ND	52,000	ND	ND	ND	4,100	55	6,200	ND	ND
GWN-PA17 Emanuel	ND	ND	9.0	ND	ND	ND	ND	170	ND	ND	ND	4.2	ND	ND	ND	ND	ND	48,000	ND	88	ND	1,900	15	3,300	ND	ND
GWN-PA18 Candler	ND	ND	ND	ND	ND	ND	ND	26	ND	ND	ND	ND	ND	ND	ND	ND	ND	32,000	ND	ND	ND	3,800	65	11,000	ND	ND
GWN-PA20 Lanier	ND	ND	ND	ND	ND	ND	ND	24	ND	ND	ND	ND	ND	ND	ND	ND	ND	44,000	ND	ND	ND	18,000	ND	4,700	ND	ND
GWN-PA22 Thomas	ND	ND	ND	ND	ND	ND	ND	28	ND	ND	ND	ND	ND	ND	ND	ND	ND	46,000	ND	ND	ND	23,000	ND	7,600	ND	ND
GWN-PA23 Grady	ND	ND	ND	ND	9.1	ND	43	ND	ND	ND	ND	120	ND	ND	ND	ND	ND	34,000	ND	43	ND	17,000	ND	11,000	ND	ND
	ND	ND	ND	ND	7.6	ND	49	ND	ND	ND	ND	110	ND	ND	ND	ND	ND	36,000	ND	85	ND	17,000	ND	11,000	ND	ND
	ND	ND	ND	ND	9.0	ND	59	ND	ND	ND	ND	110	ND	ND	ND	ND	ND	35,000	ND	230	ND	18,000	ND	11,000	ND	ND
	ND	ND	ND	ND	9.3	ND	65	ND	ND	ND	ND	120	ND	ND	ND	ND	ND	38,000	ND	130	ND	19,000	ND	12,000	ND	ND
GWN-PA25 Seminole	ND	ND	ND	ND	ND	ND	ND	7.5	ND	ND	ND	7.5	ND	ND	ND	ND	ND	61,000	ND	ND	ND	ND	3,600	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	7.7	ND	ND	ND	8.1	ND	ND	ND	ND	ND	58,000	ND	ND	ND	ND	3,700	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	8.1	ND	ND	ND	7.6	ND	ND	ND	ND	ND	61,000	ND	34	ND	ND	3,400	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	7.6	ND	ND	ND	7.6	ND	ND	ND	ND	ND	61,000	ND	34	ND	ND	3,600	ND	ND	ND

**Table A-5, Continued. Groundwater Quality Analyses for Floridan Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampled	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg/L	P mg/L
GWN-PA27 Mitchell	Camilla Industrial Park Well	360	NG	NG	04/18/17	8.39	244	1.87	20.95	ND	NA	ND	ND	0.38	0.02
GWN-PA28 Cokquilt	Moultrie Well #1	750	NG	NG	01/10/17 04/04/17 07/18/17 10/11/17	7.92 7.78 7.62 7.73	497 462 510 501	0.58 1.36 0.80 0.31	23.17 23.88 24.47 23.97	ND ND ND ND	NA NA NA NA	11 11 12 11	110 98 110 110	ND ND ND ND	ND ND ND ND
GWN-PA29 Cook	Adel Well #6	405	NG	NG	01/10/17 04/04/17 07/18/17 10/11/17	7.80 7.69 7.61 7.50	389 381 382 385	0.68 0.88 4.06 0.34	21.57 21.88 21.75 22.10	ND ND ND ND	NA NA NA NA	ND ND ND ND	69 68 71 71	ND 0.05 ND ND	0.05 0.05 0.05 0.05
GWN-PA31 TIR	Tifton Well #6	652	NG	NG	04/20/17	7.96	279	0.76	22.08	ND	NA	ND	ND	ND	0.03
GWN-PA32 Irwin	Ocala Well #3	637	NG	NG	04/20/17	7.91	231	0.45	21.90	chloroform=28	NA	ND	ND	ND	0.05
GWN-PA34A Telfair	McRae Well #3	600	NG	NG	03/21/17 08/09/17 09/19/17 12/09/17	7.36 7.57 7.46 7.44	331 318 330 341	6.73 3.80 3.09 3.25	22.09 22.15 22.26 22.07	ND ND ND ND	NA NA NA NA	ND ND ND ND	ND ND ND ND	ND 0.02 ND ND	0.02 0.02 ND ND
GWN-PA36 Toombs	Vidalia Well #1	808	NG	NG	03/21/17 06/09/17 09/19/17 12/09/17	7.82 8.01 8.00 7.87	228 219 237 236	4.83 7.81 0.51 2.48	22.82 23.58 23.14 22.76	ND ND ND ND	NA NA NA NA	ND ND ND ND	ND ND ND ND	ND 0.03 ND ND	0.03 0.03 0.02 ND
GWN-PA38 Dodge	Esselman Well #4	410	NG	NG	03/21/17	7.61	232	5.32	20.23	ND	NA	ND	ND	0.28	0.03
GWN-PA39 Worth	Sylvester Well #1	186	NG	NG	04/18/17	7.44	302	1.27	22.07	ND	NA	ND	ND	0.04	0.03
GWN-PA41A Turner	Ashburn #4	600	NG	NG	06/09/17	7.76	161	0.30	22.67	ND	NA	ND	ND	ND	ND
GWN-PA44 Turner	Sycamore Well #2	501	NG	NG	01/10/17 04/04/17 07/18/17 10/11/17	7.83 7.83 7.83 7.62	197 197 199 195	3.14 3.33 3.38 3.13	20.86 21.03 21.13 21.55	ND ND ND ND	NA NA NA NA	ND ND ND ND	ND ND ND ND	0.27 0.24 0.24 0.26	ND 0.02 ND 0.02

**Table A-5, Continued. Groundwater Quality Analyses for Floridian Stations.
Part B: Metals.**

Station No.	Chromium ug/L	Nickel ug/L	Copper ug/L	Zinc ug/L	Arsenic ug/L	Selenium ug/L	Molybdenum ug/L	Silver ug/L	Cadmium ug/L	Tin ug/L	Antimony ug/L	Barium ug/L	Thallium ug/L	Lead ug/L	Uranium ug/L	Aluminum ug/L	Beryllium ug/L	Calcium ug/L	Cobalt ug/L	Iron ug/L	Potassium ug/L	Magnesium ug/L	Manganese ug/L	Sodium ug/L	Thium ug/L	Vanadium ug/L	
GWN-PA27 Mitchell	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	12	ND	ND	NA	ND	ND	47,000	ND	ND	ND	1,400	ND	1,800	ND	ND	ND
GWN-PA28 Colequitt	ND	ND	ND	ND	ND	ND	38	ND	ND	ND	ND	92	ND	ND	NA	ND	ND	41,000	ND	ND	ND	28,000	ND	28,000	ND	ND	ND
	ND	ND	9.0	ND	ND	28	ND	ND	ND	ND	ND	92	ND	ND	NA	ND	36,000	ND	ND	ND	22,000	ND	26,000	ND	ND	ND	ND
	ND	ND	48	ND	ND	28	ND	ND	ND	ND	ND	88	ND	4.4	NA	ND	42,000	ND	ND	63	ND	25,000	ND	27,000	ND	ND	ND
	ND	ND	62	ND	ND	28	ND	ND	ND	ND	ND	86	ND	4.8	NA	ND	44,000	ND	ND	31	ND	26,000	ND	28,000	ND	ND	ND
GWN-PA28 Cook	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	13	ND	ND	NA	ND	ND	51,000	ND	51	ND	19,000	18	3,600	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	12	ND	ND	NA	ND	48,000	ND	41	ND	18,000	13	3,300	ND	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	13	ND	ND	NA	ND	51,000	ND	63	ND	20,000	18	3,600	ND	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	12	ND	ND	NA	ND	54,000	ND	38	ND	20,000	14	3,600	ND	ND	ND	ND
GWN-PA31 Tift	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	73	ND	ND	NA	ND	ND	44,000	ND	ND	ND	8,600	ND	2,500	ND	ND	ND
GWN-PA32 Irwin	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	76	ND	ND	NA	ND	ND	34,000	ND	71	ND	5,000	29	4,800	ND	ND	ND
GWN-PA34A Telfair	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	180	ND	ND	NA	ND	ND	51,000	ND	260	ND	12,000	110	5,100	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	180	ND	ND	NA	ND	47,000	ND	230	ND	12,000	98	4,800	ND	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	170	ND	ND	NA	ND	48,000	ND	280	ND	11,000	98	4,800	ND	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	180	ND	ND	NA	ND	48,000	ND	240	ND	12,000	97	4,700	ND	ND	ND	ND
GWN-PA36 Toombs	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	130	ND	ND	NA	ND	ND	29,000	ND	26	ND	6,200	38	12,000	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	140	ND	ND	NA	ND	28,000	ND	23	ND	5,800	36	11,000	ND	ND	ND	ND
	ND	ND	8.2	ND	ND	ND	ND	ND	ND	ND	ND	130	ND	ND	NA	ND	30,000	ND	27	ND	6,200	39	12,000	ND	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	140	ND	ND	NA	ND	28,000	ND	29	ND	5,800	38	11,000	ND	ND	ND	ND
GWN-PA38 Dodge	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	96	ND	ND	NA	ND	ND	44,000	ND	ND	ND	1,500	ND	2,100	ND	ND	ND
GWN-PA38 Worth	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	220	ND	ND	NA	ND	ND	48,000	ND	ND	ND	7,800	ND	3,800	ND	ND	ND
GWN-PA41A Turner	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	68	ND	ND	NA	ND	ND	20,000	ND	ND	ND	7,700	ND	2,000	ND	ND	ND
GWN-PA44 Turner	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	150	ND	ND	NA	ND	ND	31,000	ND	ND	ND	4,900	ND	2,400	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	140	ND	ND	NA	ND	31,000	ND	ND	ND	4,800	ND	2,100	ND	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	150	ND	ND	NA	ND	32,000	ND	ND	ND	5,000	ND	2,400	ND	ND	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	150	ND	ND	NA	ND	34,000	ND	ND	ND	5,000	ND	2,400	ND	ND	ND	ND

**Table A-5, Continued. Groundwater Quality Analyses for Floridan Stations.
Part A: Station Identification , Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampled	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg N/L	P mg/L
GWN-PA56 Grady	Wigham / Davis Avenue Well	604	NG	NG	03/08/17 06/07/17 09/27/17 12/08/17	7.52 7.48 7.98 7.53	408 428 408 430	0.81 0.78 0.58 0.83	22.84 22.97 23.00 22.82	ND ND ND ND	NA NA NA NA	32 37 34 37	19 20 19 21	0.08 0.05 0.03 0.04	ND ND ND ND
GWN-PA57 Coffee	Anbrose Well #2	600	485	10	01/10/17 04/04/17 07/18/17 10/11/17	8.04 7.85 7.78 7.32	257 255 254 258	0.95 2.81 5.83 0.47	22.20 22.45 22.73 24.79	ND ND ND ND	NA NA NA NA	ND ND ND ND	ND ND ND ND	ND ND ND ND	ND ND 0.02 0.02
GWN-PA59 Dougherty	Radium Spring	0	NA	NA	04/19/17	8.55	322	NA	20.20	cls 1,2-dichloroethylene=0.5 trichloroethylene=0.7	NA	ND	ND	2.10	0.02
GWN-PA60 Seminole	Smith House Well	NG	NG	NG	06/07/17	7.39	213	9.12	22.05	ND	NA	ND	ND	1.10	0.02
GWN-GLY2 Glynn	Hotwyl Broadfield Well	NG	NG	NG	08/18/17	7.29	540	1.40	24.26	ND	NA	28	100	ND	0.03
GWN-GLY3 Glynn	Jekyll Island #5	850	NG	NG	08/18/17	7.33	418	NA	22.81	ND	NA	15	72	ND	0.03
GWN-GLY4 Glynn	Hampson River Marina	750	NG	NG	08/18/17	7.33	510	0.57	25.41	ND	NA	24	100	ND	ND
GWN-LJB2 Liberty	Fort Morris Well	500	NG	NG	08/22/17	7.68	327	0.27	21.70	ND	NA	ND	38	ND	0.02
GWN-MC11 McIntosh	Sapelo Gardens SD #1	660	NG	NG	08/21/17	7.40	406	0.32	25.31	ND	NA	13	63	ND	ND
GWN-THO2 Thomas	Waverly Four Corners #1	900	NG	NG	04/19/17	8.43	253	0.26	26.02	ND	NA	ND	ND	ND	ND
	Aquifer Low Range					7.07	181	0.14	20.20			ND	ND	ND	ND
	Aquifer High Range					8.55	3,230	8.12	26.02			750	280	2.10	0.07
	Aquifer Median (ND=0)					7.62	313	1.88	22.87			17	28	0.19	0.02
	Aquifer Mean (ND=0)					7.66	368	2.54	22.88			28	28	0.19	0.02

**Table A-5, Continued. Groundwater Quality Analyses for Floridian Stations.
Part B: Metals.**

Station No. County	Chromium ug/L	Nickel ug/L	Copper ug/L	Zinc ug/L	Arsenic ug/L	Selenium ug/L	Molybdenum ug/L	Silver ug/L	Cadmium ug/L	Tin ug/L	Antimony ug/L	Barium ug/L	Thallium ug/L	Lead ug/L	Uranium ug/L	Aluminum ug/L	Iron ug/L	Cobalt ug/L	Calcium ug/L	Potassium ug/L	Magnesium ug/L	Manganese ug/L	Sodium ug/L	Titani- um ug/L	Vanadium ug/L	
GWN-PA58 Grady	ND	ND	ND	ND	ND	ND	9.5	ND	ND	ND	ND	180	ND	ND	NA	ND	ND	ND	32,000	ND	21,000	ND	23,000	ND	ND	
	ND	ND	ND	ND	ND	ND	9.9	ND	ND	ND	ND	180	ND	ND	NA	ND	ND	ND	32,000	ND	22,000	ND	23,000	ND	ND	
	ND	ND	ND	ND	ND	ND	9.2	ND	ND	ND	ND	180	ND	ND	NA	ND	ND	ND	32,000	ND	21,000	ND	21,000	ND	ND	
	ND	ND	ND	ND	ND	ND	8.2	ND	ND	ND	ND	140	ND	ND	NA	ND	ND	ND	34,000	ND	22,000	ND	23,000	ND	ND	
GWN-PA57 Coffee	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	170	ND	ND	NA	ND	ND	ND	25,000	ND	16,000	ND	8,100	ND	ND	
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	180	ND	ND	NA	ND	ND	ND	25,000	ND	15,000	ND	7,800	ND	ND	
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	150	ND	ND	NA	ND	ND	ND	24,000	ND	16,000	ND	8,200	ND	ND	
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	180	ND	ND	NA	280	71	ND	27,000	ND	16,000	ND	8,100	ND	ND	
GWN-PA59 Dougherty	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	23	ND	ND	NA	ND	ND	ND	62,000	ND	1,600	ND	2,600	ND	ND	
GWN-PA60 Seminole	ND	ND	ND	120	ND	ND	ND	ND	ND	ND	ND	3.2	ND	ND	NA	ND	ND	ND	39,000	ND	ND	ND	2,400	ND	ND	
GWN-GLY2 Glynn	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	48	ND	ND	NA	ND	730	ND	49,000	ND	30,000	11	26,000	ND	ND	
GWN-GLY3 Glynn	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	43	ND	ND	NA	ND	60	ND	37,000	ND	28,000	ND	15,000	ND	ND	
GWN-GLY4 Glynn	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	9.2	ND	ND	NA	ND	26	ND	41,000	ND	31,000	ND	27,000	ND	ND	
GWN-LIB2 Liberty	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	25	ND	ND	NA	ND	870	ND	28,000	ND	17,000	10	16,000	ND	ND	
GWN-MC11 McIntosh	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	57	ND	ND	NA	ND	59	ND	34,000	ND	24,000	ND	19,000	ND	ND	
GWN-THO2 Thomas	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	110	ND	ND	NA	ND	160	ND	20,000	ND	13,000	ND	13,000	ND	ND	
Aquifer Low Range	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	3.2	ND	ND	ND	NA	ND	ND	ND	20,000	ND	ND	ND	1,800	ND	ND	
Aquifer High Range	9.3	85.0	8.3	220.0	76.0	82.5	82.5	120,000	1,300	88,000	110	420,000	8,000	8,000	8,000	13,000	13,000	13,000	13,000	13,000	14,138	12	17,248	12	17,248	
Aquifer Median (ND=0)	0.5	5.7	0.5	82.5	82.5	82.5	82.5	40,031	82	82	82	14,138	12	17,248	12	17,248	12	17,248	12	17,248	12	17,248	12	17,248	12	17,248
Aquifer Mean (ND=0)																										

**Table A-6. Groundwater Quality Analyses for Miocene Stations.
Part A: Station Identification , Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampling	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NO3 mg N/L	P mg/L
GWN-MI1 Cook	Adel/McMillan	220	NG	NG	07/05/17	7.78	240	1.14	22.92	ND	NA	ND	ND	ND	0.02
GWN-MI2A Lowndes	Boutwell House Well	70	NG	NG	07/05/17	4.04	146	4.34	21.52	chloroform = 1.7	NA	16	ND	8.50	ND
GWN-MI8A Thomas	Murphy Garden Well	22	NG	NG	07/05/17	6.61	307	NA	25.17	ND	NA	19	ND	18.00	0.14
GWN-MI10B Cokquitt	Callhoun House Well	150	NG	NG	07/05/17	6.30	108	7.15	21.86	ND	NA	ND	ND	ND	0.52
GWN-MI16 Liberty	Liberty County East Dis- trict Fire Station Deep Well	400	NG	NG	08/22/17	7.47	312	0.77	22.55	ND	NA	ND	34	ND	0.02
GWN-MI17 Effingham	Springfield Egypt Road Test Well	120	NG	NG	08/08/17	7.72	252	NA	18.85	ND	NA	ND	ND	ND	0.02
GWN-WAY1 Wayne	Rainree TP Main Well	400	NG	NG	10/25/17	7.83	228	3.34	21.92	ND	NA	ND	ND	ND	0.08
	Aquifer Low Range					4.04	108	0.77	18.85			ND	ND	ND	ND
	Aquifer High Range					7.83	312	7.15	25.17			18	19.0	18.0	0.52
	Aquifer Median (ND=0)					7.47	240	3.34	21.92			ND	ND	ND	0.02
	Aquifer Mean (ND=0)					6.82	227	3.35	22.06			5	3.9	3.9	0.11

**Table A-6. Groundwater Quality Analyses for Miocene Stations.
Part B: Metals.**

Station No. County	Chromium ug/L	Nickel ug/L	Copper ug/L	Zinc ug/L	Arsenic ug/L	Selenium ug/L	Molybdenum ug/L	Silver ug/L	Cadmium ug/L	Thallium ug/L	Lead ug/L	Uranium cp/L	Aluminum ug/L	Barium ug/L	Antimony ug/L	Tin ug/L	Cobalt ug/L	Strontium ug/L	Manganese ug/L	Sodium ug/L	Vanadium ug/L			
GWN-MI1 Cook	ND	ND	ND	30	ND	ND	ND	ND	ND	ND	ND	NA	ND	18	ND	ND	ND	23,000	ND	ND	6,900	ND	ND	
GWN-MI2A Lowndes	ND	ND	8.3	13	ND	ND	ND	ND	ND	ND	4.7	NA	170	28	ND	ND	ND	4,200	ND	8,800	10	9,800	ND	ND
GWN-MI3A Thomas	ND	ND	30	50	ND	ND	ND	ND	ND	ND	ND	NA	100	120	ND	ND	ND	35,000	ND	11,000	13	6,600	ND	ND
GWN-MI10B Calquitt	ND	ND	13	31	ND	25	ND	ND	ND	ND	2.5	NA	ND	160	ND	ND	ND	7,400	ND	5,400	92	7,000	ND	ND
GWN-MI16 Liberty	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	25	ND	ND	ND	27,000	ND	17,000	ND	17,000	ND	ND
GWN-MI17 Effingham	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	21	ND	ND	ND	43,000	ND	2,000	12	8,700	ND	ND
GWN-WAY1 Wayne	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	29	ND	ND	ND	25,000	ND	8,900	82	11,000	ND	ND
Aquifer Low Range														18				4,200		2,000	ND	6,600		
Aquifer High Range														160				43,000		17,000	92	17,000		
Aquifer Median (ND=0)														28				25,000		8,900	12	8,700		
Aquifer Mean (ND=0)														57				23,514		2,543	30	9,571		

**Table A-7. Groundwater Quality Analyses for Piedmont-Blue Ridge Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size inches	Date sampled	pH	cond. uS/cm	dis. O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg NL	P mg/L
GWN-P1A Mertweather	Luthersville Well #3	185	NG	NG	06/20/17	5.88	89	7.68	17.28	ND	NA	ND	ND	1.10	0.08
GWN-P5 Hall	Flowery Branch Well #1	240	NG	NG	07/19/17	6.53	185	5.80	16.34	ND	NA	ND	ND	1.00	0.03
GWN-P12A Butts	Indian Spring	0	NG	NG	02/08/17	7.19	280	NA	18.83	ND	4.50	10	24	ND	0.02
					05/03/17	7.13	280	NA	17.44	ND	4.70	10	24	ND	0.03
					08/02/17	6.96	282	NA	19.24	ND	4.70	10	23	ND	0.03
					11/15/17	7.35	280	NA	17.81	ND	4.70	10	24	ND	0.02
GWN-P20 Gwinnett	Suwanee #1	800	NG	NG	07/19/17	7.48	364	3.48	17.59	ND	NA	ND	13	0.35	ND
GWN-P21 Jones	Gary/Bragg Well	405	NG	NG	02/08/17	6.18	346	3.42	19.03	ND	NA	ND	38	0.07	0.03
					05/03/17	6.64	280	6.70	20.57	ND	NA	ND	27	0.09	0.03
					08/02/17	6.33	320	8.55	19.65	ND	NA	ND	27	0.10	0.04
					11/15/17	6.70	310	1.89	18.40	ND	NA	ND	26	0.13	0.05
GWN-P22 Fulton	Rehbar Well	200	NG	NG	07/19/17	5.12	41	5.43	17.84	chloroform = 1.3	NA	ND	ND	0.84	ND
GWN-P23 Butts	Indian Springs State Park New Main Well	NG	NG	NG	02/08/17	6.46	145	1.44	18.40	ND	1.20	ND	ND	0.17	0.07
					05/03/17	6.32	141	2.07	18.39	ND	1.10	ND	ND	0.28	0.07
					08/02/17	6.19	142	1.70	18.35	ND	1.10	ND	ND	0.25	0.09
					11/15/17	6.51	143	1.47	18.13	ND	0.99	ND	ND	0.25	0.07
GWN-P24 Covetta	The Gates Well #1	705	NG	NG	06/09/17	7.36	233	6.98	18.62	ND	NA	ND	14	0.25	0.05
GWN-P25 Jones	Jarrell Plantation Staff House Well	NG	NG	NG	02/08/17	6.16	215	3.26	18.43	ND	NA	ND	14	0.15	0.08
					05/03/17	6.18	204	2.95	18.68	ND	NA	ND	14	0.16	0.10
					08/02/17	5.85	188	3.31	18.74	ND	NA	ND	11	0.18	0.12
					11/15/17	6.35	223	3.39	18.66	ND	NA	ND	15	0.10	0.10
GWN-P26 Covetta	Willow Court Well	NG	NG	NG	06/07/17	6.12	130	3.63	17.36	ND	NA	ND	11	1.60	0.08
GWN-P30 Lincoln	Fizer House Well	220	NG	NG	05/17/17	7.52	431	1.27	18.59	ND	NA	15	16	2.30	0.04
GWN-P32 Elbert	Cocchini Deep Well	400	NG	NG	01/25/17	7.32	767	0.62	16.92	ND	NA	ND	320	ND	ND
					04/08/17	7.72	820	7.40	17.04	ND	NA	ND	280	ND	ND
					07/08/17	7.75	860	0.36	20.36	ND	NA	ND	380	ND	ND
					10/11/17	7.67	808	0.29	19.59	ND	NA	ND	320	ND	ND

**Table A-7. Groundwater Quality Analyses for Piedmont-Blue Ridge Stations.
Part B: Metals.**

Station No.	County	Chromium ug/L	Nickel ug/L	Copper ug/L	Zinc ug/L	Arsenic ug/L	Selenium ug/L	Molybdenum ug/L	Silver ug/L	Cadmium ug/L	Tin ug/L	Antimony ug/L	Barium ug/L	Thallium ug/L	Lead ug/L	Uranium ug/L	Aluminum ug/L	Calcium ug/L	Cobalt ug/L	Iron ug/L	Potassium ug/L	Magnesium ug/L	Manganese ug/L	Sodium ug/L	Thorium ug/L	Vanadium ug/L
GWN-P1A	Meriwether	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	49	ND	ND	NA	ND	9,800	ND	ND	ND	2,600	ND	4,400	ND	ND
GWN-P5	Hall	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	40	ND	ND	NA	ND	27,000	ND	ND	ND	5,800	ND	2,800	ND	ND
GWN-P12A	Burke	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NA	ND	17,000	ND	ND	ND	2,800	21	38,000	ND	ND
GWN-P20	Gwinnett	ND	ND	ND	73	ND	ND	ND	ND	ND	ND	ND	210	ND	ND	NA	ND	52,000	ND	ND	ND	11,000	66	12,000	ND	ND
GWN-P21	Jones	ND	ND	ND	12	ND	ND	ND	ND	ND	ND	ND	11	ND	ND	11.3	ND	42,000	ND	37	ND	10,000	25	16,000	ND	ND
GWN-P22	Fulton	ND	ND	ND	51	ND	ND	ND	ND	ND	ND	ND	23	ND	ND	NA	ND	1,300	ND	ND	ND	1,400	ND	3,500	ND	ND
GWN-P23	Burke	ND	ND	ND	28	ND	ND	ND	ND	ND	ND	ND	4.9	ND	ND	NA	ND	13,000	ND	60	ND	4,100	ND	14,000	ND	ND
GWN-P24	Coweta	ND	ND	ND	14	ND	ND	ND	ND	ND	ND	ND	5.0	ND	ND	NA	ND	12,000	ND	28	ND	3,900	ND	13,000	ND	ND
GWN-P25	Jones	ND	ND	ND	10	ND	ND	ND	ND	ND	ND	ND	7.0	ND	ND	NA	ND	12,000	ND	370	ND	4,000	ND	13,000	11	ND
GWN-P26	Coweta	ND	ND	ND	13	ND	ND	ND	ND	ND	ND	ND	4.8	ND	ND	NA	ND	12,000	ND	94	ND	4,000	ND	14,000	ND	ND
GWN-P28	Lincoln	ND	ND	ND	10	ND	ND	ND	ND	ND	ND	ND	17	ND	ND	NA	ND	31,000	ND	ND	ND	5,100	ND	12,000	ND	ND
GWN-P30	Elbert	ND	ND	ND	5.3	ND	ND	ND	ND	ND	ND	ND	2.5	ND	ND	13.5	ND	18,000	ND	91	ND	6,800	95	16,000	ND	ND
GWN-P32	Elbert	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.1	ND	ND	12.6	ND	16,000	ND	120	ND	6,600	88	16,000	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.1	ND	ND	15.9	88	20,000	ND	160	ND	7,000	62	20,000	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.1	ND	ND	NA	ND	9,500	ND	ND	ND	3,500	ND	10,000	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.6	ND	ND	NA	94	38,000	ND	ND	ND	28,000	ND	17,000	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.1	ND	ND	10.8	ND	160,000	ND	ND	ND	1,800	18	25,000	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.1	ND	ND	12.4	ND	210,000	ND	ND	ND	2,000	20	27,000	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.1	ND	ND	12.4	ND	130,000	ND	ND	ND	2,200	18	24,000	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.1	ND	ND	12.4	ND	200,000	ND	ND	ND	2,300	21	27,000	ND	ND

**Table A-7 Continued. Groundwater Quality Analyses for Piedmont-Blue Ridge Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampled	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg N/L	P mg/L
GWN-P33 Elbert	Cocchini Bored Well	47	NG	NG	01/25/17 04/08/17 07/08/17 10/11/17	5.87 6.84 8.50 8.38	107 114 138 131	8.21 8.81 1.87 3.78	17.88 17.24 18.28 18.28	ND ND ND ND	NA NA NA NA	ND ND ND ND	ND ND ND ND	1.70 1.20 1.00 1.40	0.05 0.05 0.03 0.04
GWN-P34 Columbia	Middleton State Park Cottage Area Well	NG	NG	NG	02/22/17 05/17/17 08/01/17 11/14/17	5.83 6.11 6.03 6.33	111 71 154 192	7.78 7.41 6.88 8.88	16.23 18.95 18.58 17.95	ND ND ND ND	NA NA NA NA	ND ND 17 22	ND ND 17 22	0.61 0.46 0.42 0.40	0.12 0.11 0.18 0.20
GWN-P35 Franklin	O'Connor Well	150	NG	NG	01/25/17 04/05/17 07/08/17 10/11/17	6.54 7.07 6.95 6.98	187 189 193 184	NA 6.89 4.08 0.37	17.28 16.72 17.27 17.23	ND ND ND ND	NA NA NA NA	ND ND ND ND	ND ND ND ND	ND ND ND ND	0.02 0.02 0.02 0.02
GWN-P37 Habersham	ML Aisy/Cay Hall Well	500	NG	NG	01/25/17 04/05/17 07/08/17 10/11/17	6.03 6.84 3.70 6.40	375 290 370 328	3.02 2.72 1.58 5.40	16.84 16.59 16.84 16.84	ND ND ND ND	NA NA NA NA	40 17 35 29	28 20 25 23	0.35 0.10 0.28 0.22	ND ND ND ND
GWN-P38 Carnoll	Rooseville Well #1	230	NG	NG	08/20/17	4.53	43	5.93	17.94	ND	NA	ND	ND	1.80	ND
GWN-P39 Marion/ether	Gay Well #1	600	NG	NG	08/28/17	5.98	72	NA	17.88	ND	NA	ND	ND	0.98	0.05
GWN-P40 Greene	Sloan Well #2	300	NG	NG	05/17/17	6.31	98	6.45	18.87	ND	NA	ND	ND	1.50	0.10
GWN-BANYA Banta	Yonah Homer Road Well	445	NG	NG	05/18/17	7.73	318	0.55	19.78	ND	NA	ND	84	0.07	ND
GWN-COU1 Columbia	Windy Acres Mobile Home Park Well #1	180	NG	NG	08/01/17	6.74	121	9.21	19.34	ND	NA	ND	ND	ND	0.17
GWN-COU2 Columbia	Grovetown Well #1	NG	NG	NG	08/01/17	7.81	143	NA	21.02	ND	NA	ND	13	0.02	0.09
GWN-COU3 Columbia	Harlan Well #1	250	NG	NG	08/15/17	6.88	180	0.40	20.63	ND	NA	ND	ND	ND	0.15
GWN-COU4 Columbia	Tradewinds Marina Well	NG	NG	NG	08/01/17	6.59	388	0.63	18.50	MTBE=0.98	NA	ND	11	0.38	0.07
GWN-ELB1 Elbert	Beaverdam Mobile Home Park Well #1	250	NG	NG	01/25/17	5.89	198	7.24	16.97	ND	NA	ND	19	1.80	0.12

**Table A-7 Continued. Groundwater Quality Analyses for Piedmont-Blue Ridge Stations.
Part B: Metals.**

Station No.	Chromium	Nickel	Copper	Zinc	Arsenic	Selenium	Molybdenum	Silver	Cadmium	Tin	Antimony	Barium	Thallium	Lead	Uranium	Aluminum	Beryllium	Calcium	Cobalt	Iron	Potassium	Magnesium	Manganese	Sodium	Thorium	Zinc
County	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L
GWN-P33 Elbert	ND	ND	18	12	ND	ND	ND	ND	ND	ND	ND	23	ND	1.3	NA	230	ND	16,000	ND	260	ND	ND	22	4,500	ND	ND
	ND	ND	21	17	ND	ND	ND	ND	ND	ND	ND	20	ND	2.2	NA	180	ND	17,000	ND	210	ND	ND	ND	4,400	ND	ND
	ND	ND	16	13	ND	ND	ND	ND	ND	ND	ND	23	ND	ND	NA	78	ND	22,000	ND	210	ND	ND	20	5,200	ND	ND
GWN-P34 Columbia	ND	ND	12	18	ND	ND	ND	ND	ND	ND	ND	27	ND	ND	NA	NA	ND	23,000	ND	370	ND	ND	28	4,800	ND	ND
	ND	ND	16	15	ND	ND	ND	ND	ND	ND	ND	22	ND	ND	ND	ND	7,100	7,100	ND	80	ND	4,100	14	12,000	ND	ND
	ND	ND	7.8	12	ND	ND	ND	ND	ND	ND	ND	30	ND	ND	ND	ND	4,800	4,800	ND	ND	ND	3,200	13	7,700	ND	ND
GWN-P35 Franklin	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	15	ND	ND	ND	ND	12,000	12,000	ND	ND	ND	8,200	ND	12,000	ND	ND
	ND	ND	ND	22	ND	ND	ND	ND	ND	ND	ND	11	ND	ND	21.5	ND	14,000	14,000	ND	ND	ND	6,800	ND	13,000	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	34	ND	ND	ND	ND	21,000	21,000	ND	38	7,100	6,900	140	7,600	ND	ND
GWN-P37 Habersham	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	33	ND	ND	ND	ND	21,000	21,000	ND	38	6,900	6,800	130	7,000	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	33	ND	ND	ND	ND	21,000	21,000	ND	35	7,400	6,600	130	7,800	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	33	ND	ND	ND	ND	21,000	21,000	ND	66	6,900	6,700	130	7,600	ND	ND
GWN-P38 Carroll	ND	ND	ND	11	ND	ND	ND	ND	ND	ND	ND	25	ND	ND	NA	NA	1,200	1,200	ND	ND	ND	ND	25	4,600	ND	ND
	ND	ND	ND	36	ND	ND	ND	ND	ND	ND	ND	43	ND	ND	NA	NA	5,200	5,200	ND	310	ND	1,300	ND	6,800	ND	ND
	ND	ND	9.6	41	ND	ND	ND	ND	ND	ND	ND	22	ND	ND	NA	NA	6,700	6,700	ND	40	ND	1,500	ND	9,700	ND	ND
GWN-BAN1A Banks	ND	ND	ND	ND	ND	ND	5.1	ND	ND	ND	ND	17	ND	ND	10.4	ND	37,000	37,000	ND	ND	ND	ND	ND	27,000	ND	ND
	ND	ND	ND	16	ND	ND	ND	ND	ND	ND	ND	39	ND	8.7	NA	NA	9,300	9,300	ND	1,000	ND	3,700	170	7,400	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	100	ND	ND	NA	NA	12,000	12,000	ND	ND	ND	3,400	73	9,800	ND	ND
GWN-COU1 Columbia	ND	ND	ND	290	ND	ND	ND	ND	ND	ND	ND	9.3	ND	ND	NA	NA	16,000	16,000	ND	2,100	ND	1,700	360	15,000	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	13	ND	ND	ND	ND	57,000	57,000	ND	200	ND	7,200	340	19,000	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	48	ND	ND	ND	ND	22,000	22,000	ND	180	ND	4,100	49	12,000	ND	ND

**Table A-7 Continued. Groundwater Quality Analyses for Piedmont-Blue Ridge Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampled	pH	cond. uS/cm	diss O2 mg/L	Temp °C	VOCs ug/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg NL	P mg/L
GWN-FAY1 Fayette	Lone Oak Well	NG	NG	NG	06/07/17	7.10	248	NA	18.14	ND	NA	ND	17	ND	0.04
GWN-FRA1 Franklin	Victoria Bryant State Park Well #101	NG	NG	NG	05/18/17	6.54	105	0.78	16.84	ND	NA	ND	ND	ND	0.04
GWN-HAL1 Hall	Leisure Lake Village Well #1	360	NG	NG	06/02/17	6.28	170	5.63	30.39	ND	NA	ND	ND	3.80	0.03
GWN-HAS1 Harris	Valley Inn Well	NG	NG	NG	05/17/17	6.57	167	1.25	18.18	ND	NA	ND	ND	0.03	0.04
GWN-HAS2 Harris	F D Roosevelt State Park Spring	0	NA	NA	05/17/17	4.36	12	NA	17.02	ND	NA	ND	ND	ND	ND
GWN-MAD1 Madison	Ila Well #1	650	NG	NG	05/18/17	7.36	185	0.55	18.14	ND	NA	ND	12	ND	0.04
GWN-STE1 Stephens	Lake Harbor Shores Well #4	378	NG	NG	05/18/17	6.27	138	3.61	17.30	ND	NA	ND	ND	0.31	0.04
GWN-UFS1 Upson	Country Village Well #13	NG	NG	NG	05/17/17	7.54	169	1.67	18.77	chloroform = 1.1	NA	ND	ND	0.08	0.07
GWN-WAS3 Washington	Hamburg State Park	200	NG	NG	02/22/17	7.49	225	0.09	18.28	ND	NA	13	ND	ND	ND
GWN-WHI1 White	Sweetwater Coffee House	NG	NG	NG	05/03/17	6.14	100	4.87	15.85	ND	NA	ND	ND	0.77	0.07
GWN-WKE1 Wilkes	Rayle #1	NG	NG	NG	08/15/17	6.01	146	5.22	18.33	ND	NA	ND	ND	3.30	0.12
GWN-BRT1B Townes	Young Harris/ Swanson Road Well	265	NG	NG	02/08/17 05/03/17 06/02/17 11/14/17	7.05 6.88 6.98 6.88	198 176 181 175	0.67 1.11 0.78 1.30	15.40 15.66 15.42 15.17	ND ND ND ND	NA NA NA NA	ND ND ND ND	20 21 21 20	0.04 0.04 0.06 0.08	ND ND ND ND
GWN-BRS Murray	Chatsworth/ Nix Spring	0	NA	NA	02/08/17	5.07	50	NA	13.78	ND	NA	ND	ND	0.49	0.07
GWN-TOW1 Townes	Brasstown Bald Spring	0	NA	NA	05/03/17	5.20	18	NA	10.49	ND	NA	ND	ND	0.45	ND
GWN-JUN1 Union	Bryant Cove Well #2	605	48	NG	02/08/17	6.55	116	2.61	15.89	ND	NA	ND	ND	ND	0.04
	Aquifer Low Range					4.36	12	0.09	10.49				ND	ND	ND
	Aquifer High Range					7.75	9.21	30.39					40	380	0.20
	Aquifer Median (ND=0)					6.54	165	3.70	17.95				11	0.16	0.04
	Aquifer Mean (ND=0)					6.53	227	3.71	17.87				3	29	0.47

**Table A-7 Continued. Groundwater Quality Analyses for Piedmont-Blue Ridge Stations.
Part B: Metals.**

Station No.	Chromium ug/L	Nickel ug/L	Copper ug/L	Zinc ug/L	Arsenic ug/L	Selenium ug/L	Molybdenum ug/L	Silver ug/L	Cadmium ug/L	Tin ug/L	Antimony ug/L	Barium ug/L	Thallium ug/L	Lead ug/L	Uranium ug/L	Aluminum ug/L	Boron ug/L	Calcium ug/L	Cobalt ug/L	Iron ug/L	Potassium ug/L	Magnesium ug/L	Manganese ug/L	Sodium ug/L	Titanium ug/L	Vanadium ug/L
GWN-FAY1 Fayette	18.8	ND	ND	28	ND	ND	ND	ND	ND	ND	ND	18	ND	ND	NA	ND	ND	28,000	ND	1,500	ND	3,800	23	18,000	ND	ND
GWN-FRA1 Franklin		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	4.8	ND	ND	ND	ND	ND	15,000	ND	620	ND	2,300	68	7,600	ND	ND
GWN-HAL1 Hall		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	54	ND	ND	ND	ND	ND	17,000	ND	78	ND	7,800	13	6,000	ND	ND
GWN-HAS1 Harris		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	11	ND	ND	NA	ND	ND	22,000	ND	38	ND	2,800	130	7,400	ND	ND
GWN-HAS2 Harris		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	11	ND	ND	NA	ND	ND	ND	ND	70	ND	ND	ND	ND	ND	ND
GWN-MAD1 Madison		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	6.5	ND	ND	NA	ND	ND	22,000	ND	580	ND	4,800	140	9,900	ND	ND
GWN-STE1 Stephens		ND	ND	14	ND	ND	ND	ND	ND	ND	ND	41	ND	ND	NA	ND	ND	13,000	ND	33	ND	5,700	ND	7,700	ND	ND
GWN-UFS1 Upson		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	4.5	ND	ND	NA	ND	ND	22,000	ND	ND	ND	4,000	ND	6,300	ND	ND
GWN-WAS3 Washington		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	94	ND	ND	ND	ND	ND	26,000	ND	110	ND	2,800	270	19,000	ND	ND
GWN-WFH1 White		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	68	ND	ND	NA	ND	ND	8,400	ND	410	ND	1,700	21	8,600	ND	ND
GWN-WKE1 Wilkes		ND	ND	14	ND	ND	ND	ND	ND	ND	ND	61	ND	ND	ND	ND	ND	15,000	ND	27	ND	2,100	13	12,000	ND	ND
GWN-BR1B Townes		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	78	ND	ND	NA	ND	ND	24,000	ND	ND	ND	5,300	18	4,100	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	78	ND	ND	NA	ND	ND	23,000	ND	22	ND	5,300	29	4,000	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	98	ND	ND	NA	ND	ND	24,000	ND	ND	ND	5,600	21	4,300	ND	ND
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	78	ND	ND	NA	ND	ND	22,000	ND	ND	ND	5,200	14	4,000	ND	ND
GWN-BRS Murray		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	13	ND	ND	NA	ND	ND	4,000	ND	ND	ND	ND	ND	3,600	ND	ND
GWN-TOW1 Townes		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	9.2	ND	ND	NA	ND	ND	ND	ND	ND	ND	ND	45	1,200	ND	ND
GWN-UNI1 Union		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	11	ND	3.0	NA	ND	ND	13,000	ND	50	ND	1,500	ND	6,800	ND	ND
Aquifer Low Range												ND					ND			ND		ND	ND	ND		
Aquifer High Range												210.0					210,000			2,100		28,000	380	38,000		
Aquifer Median (ND=0)											20.0						19,000			38		4,000	21	10,500		
Aquifer Mean (ND=0)											28.0						28,176			153		4,557	54	12,524		

**Table A-8. Groundwater Quality Analyses for Valley-and-Ridge/Appalachian Plateau Stations.
Part A: Station Identification, Date of Sampling, Field Parameters, VOCs, Anions, and Non-Metals.**

Station No. County	Well Name	Well Depth feet	Casing Depth feet	Well Size Inches	Date sampled	pH	cond. uS/cm	dis. O2 mg/L	Temp °C	VOCs µg/L	F mg/L	Cl mg/L	SO4 mg/L	NOx mg NR	P mg/L
GWN-VR1 Floyd	Floyd County Kingston Road Well	280	NG	NG	05/02/17	7.44	283	9.17	16.33	ND	NA	ND	ND	0.69	ND
GWN-VR2A Walker P	LaFayette Lower Big Spring	0	NG	NG	05/02/17	7.13	306	NA	16.20	ND	NA	ND	ND	1.70	0.03
GWN-VR3 Walker	Chickamauga Crawfish Spring	0	NG	NG	05/02/17	7.12	288	NA	15.11	ND	NA	ND	ND	0.97	ND
GWN-VR6A Blairton	Chemical Products Corp. South Well	300	NG	NG	05/02/17	7.47	286	5.48	17.50	1,1 - dichloroethylene = 1.3 tetrachloroethylene = 1.9	NA	ND	ND	0.84	0.02
GWN-VR8 Poik	Cedarstown Spring	0	NG	NG	02/21/17 05/19/17 08/02/17 11/15/17	7.31 7.31 7.30 7.48	266 283 288 284	NA NA NA NA	16.63 16.32 16.42 16.33	ND ND ND ND	NA NA NA NA	ND ND ND ND	ND ND ND ND	0.77 0.85 0.84 0.76	ND ND ND ND
GWN-VR10 Murray	Elton Spring	0	NG	NG	04/19/17	7.15	279	4.81	16.23	ND	NA	ND	ND	1.60	ND
	Aquifer Low Range					7.12	263	5.48	15.11					0.69	
	Aquifer High Range					7.48	306	9.17	17.50					1.60	
	Aquifer Median (ND=0)					7.31	283	7.33	16.33					0.84	
	Aquifer Mean (ND=0)					7.30	280	7.33	16.34					1.02	

**Table A-8. Groundwater Quality Analyses for Valley-and-Ridge/Appalachian Plateau Stations.
Part B: Metals.**

Station No. County	Chromium ug/L	Nickel ug/L	Copper ug/L	Zinc ug/L	Arsenic ug/L	Selenium ug/L	Molybdenum ug/L	Silver ug/L	Cadmium ug/L	Tin ug/L	Antimony ug/L	Barium ug/L	Thallium ug/L	Lead ug/L	Uranium ug/L	Aluminum ug/L	Beryllium ug/L	Calcium ug/L	Cobalt ug/L	Iron ug/L	Potassium ug/L	Magnesium ug/L	Manganese ug/L	Sodium ug/L	Titanium ug/L	Vanadium ug/L
GWN-VR1 Floyd	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	9.3	ND	ND	NA	ND	ND	29,000	ND	ND	ND	18,000	ND	1,600	ND	ND
GWN-VR2A Walker	ND	ND	ND	17	ND	ND	ND	ND	ND	ND	ND	94	ND	1.9	NA	230	ND	41,000	ND	390	ND	15,000	36	1,700	11	ND
GWN-VR3 Walker	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	73	ND	ND	NA	ND	ND	33,000	ND	ND	ND	15,000	ND	1,300	ND	ND
GWN-VR6A Bartow	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	490	ND	ND	NA	ND	ND	28,000	ND	ND	ND	18,000	ND	6,700	ND	ND
GWN-VR8 Polk	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	15	ND	ND	NA	ND	ND	35,000	ND	28	ND	17,000	ND	1,600	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	14	ND	ND	NA	ND	ND	34,000	ND	ND	ND	17,000	ND	1,900	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	18	ND	ND	NA	ND	ND	38,000	ND	21	ND	17,000	ND	1,700	ND	ND
	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	14	ND	ND	NA	ND	ND	35,000	ND	ND	ND	16,000	ND	1,500	ND	ND
GWN-VR10 Murray	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	50	ND	ND	NA	ND	ND	33,000	ND	ND	ND	15,000	ND	2,500	ND	ND
Acquifer Low Range												9.3						28,000				15,000		1,300		
Acquifer High Range												490.0						41,000				18,000		6,700		
Acquifer Median (ND=0)												18.0						34,000				17,000		1,700		
Acquifer Mean (ND=0)												86.4						33,778				16,444		2,278		

Table A-9. Analytes, EPA Analytical Methods, and Reporting Limits.

Analyte	Reporting Limit/ EPA Method	Analyte	Reporting Limit/ EPA Method
Vinyl Chloride	0.5 ug/L / 524.2	Dichlorodifluoromethane	0.5 ug/L / 524.2
1,1-Dichloroethylene	0.5 ug/L / 524.2	Chloromethane	0.5 ug/L / 524.2
Dichloromethane	0.5 ug/L / 524.2	Bromomethane	0.5 ug/L / 524.2
Trans-1,2-Dichloroethylene	0.5 ug/L / 524.2	Chloroethane	0.5 ug/L / 524.2
Cis-1,2-Dichloroethylene	0.5 ug/L / 524.2	Fluorotrichloromethane	0.5 ug/L / 524.2
1,1,1-Trichloroethane	0.5 ug/L / 524.2	1,1-Dichloroethane	0.5 ug/L / 524.2
Carbon Tetrachloride	0.5 ug/L / 524.2	2,2-Dichloropropane	0.5 ug/L / 524.2
Benzene	0.5 ug/L / 524.2	Bromochloromethane	0.5 ug/L / 524.2
1,2-Dichloroethane	0.5 ug/L / 524.2	Chloroform	0.5 ug/L / 524.2
Trichloroethylene	0.5 ug/L / 524.2	1,1-Dichloropropene	0.5 ug/L / 524.2
1,2-Dichloropropane	0.5 ug/L / 524.2	Dibromomethane	0.5 ug/L / 524.2
Toluene	0.5 ug/L / 524.2	Bromodichloromethane	0.5 ug/L / 524.2
1,1,2-Trichloroethane	0.5 ug/L / 524.2	Cis-1,3-Dichloropropene	0.5 ug/L / 524.2
Tetrachloroethylene	0.5 ug/L / 524.2	Trans-1,3-Dichloropropene	0.5 ug/L / 524.2
Chlorobenzene	0.5 ug/L / 524.2	1,3-Dichloropropane	0.5 ug/L / 524.2
Ethylbenzene	0.5 ug/L / 524.2	Chlorodibromomethane	0.5 ug/L / 524.2
Total Xylenes	0.5 ug/L / 524.2	1,2-Dibromoethane	0.5 ug/L / 524.2
Styrene	0.5 ug/L / 524.2	1,1,1,2-Tetrachloroethane	0.5 ug/L / 524.2
p-Dichlorobenzene	0.5 ug/L / 524.2	Bromoform	0.5 ug/L / 524.2
o-Dichlorobenzene	0.5 ug/L / 524.2	Isopropylbenzene	0.5 ug/L / 524.2
1,2,4-Trichlorobenzene	0.5 ug/L / 524.2	1,1,2,2-Tetrachloroethane	0.5 ug/L / 524.2

Table A-9, Continued. Analytes, EPA Analytical Methods, and Reporting Limits.

Analyte	Reporting Limit/ EPA Method	Analyte	Reporting Limit/ EPA Method
Bromobenzene	0.5 ug/L / 524.2	Total Phosphorus	0.02 mg/L / 365.1
1,2,3-Trichloro- propane	0.5 ug/L / 524.2	Fluoride	0.20 mg/L / 300.0
n-Propylbenzene	0.5 ug/L / 524.2	Silver	10 ug/L / 200.7 (ICP)
o-Chlorotoluene	0.5 ug/L / 524.2	Aluminum	60 ug/L / 200.7
1,3,5-Trimethyl- benzene	0.5 ug/L / 524.2	Arsenic	80 ug/L / 200.7
p-Chlorotoluene	0.5 ug/L / 524.2	Barium	10 ug/L / 200.7
Tert-Butylbenzene	0.5 ug/L / 524.2	Beryllium	10 ug/L / 200.7
1,2,4-Trimethyl- benzene	0.5 ug/L / 524.2	Calcium	1000 ug/L / 200.7
Sec-Butylbenzene	0.5 ug/L / 524.2	Cobalt	10 ug/L / 200.7
p-Isopropyltoluene	0.5 ug/L / 524.2	Chromium	20 ug/L / 200.7
m-Dichlorobenzene	0.5 ug/L / 524.2	Copper	20 ug/L / 200.7
n-Butylbenzene	0.5 ug/L / 524.2	Iron	20 ug/L / 200.7
1,2-Dibromo-3- chloropropane	0.5 ug/L / 524.2	Potassium	5000 ug/L / 200.7
Hexachlorobutadi- ene	0.5 ug/L / 524.2	Magnesium	1000 ug/L / 200.7
Naphthalene	0.5 ug/L / 524.2	Manganese	10 ug/L / 200.7
1,2,3-Trichloro- benzene	0.5 ug/L / 524.2	Sodium	1000 ug/L / 200.7
Methyl-tert-butyl ether (MTBE)	0.5 ug/L / 524.2	Nickel	20 ug/L / 200.7
Chloride	10 mg/L / 300.0	Lead	90 ug/L / 200.7
Sulfate*	10 mg/L / 300.0	Antimony	120 ug/L / 200.7
Nitrate/nitrite*	0.02 mg/L as Nitrogen / 353.2	Selenium	190 ug/L / 200.7

Table A-9, Continued Analytes, EPA Analytical Methods, and Reporting Limits.

Analyte	Reporting Limit/ EPA Method	Analyte	Reporting Limit/ EPA Method
Titanium	10 ug/L / 200.7	Molybdenum	5 ug/L / 200.8
Thallium	200 ug/L / 200.7	Silver	5 ug/L / 200.8
Vanadium	10 ug/L / 200.7	Cadmium	0.7 ug/L / 200.8
Zinc	20 ug/L / 200.7	Tin	30 ug/L / 200.8
Chromium	5 ug/L / 200.8 (ICPMS)	Antimony	5 ug/L / 200.8
Nickel	10 ug/L / 200.8	Barium	2 ug/L / 200.8
Copper	5 ug/L / 200.8	Thallium	1 ug/L / 200.8
Zinc	10 ug/L / 200.8	Lead	1 ug/L / 200.8
Arsenic	5 ug/L / 200.8	Uranium	1 ug/L / 200.8
Selenium	5 ug/L / 200.8		

*** Note:** Reporting limits for sulfate and nitrate/nitrite are subject to change. A sample with a concentration of either analyte greater than certain ranges may need to be diluted to bring the concentration within the analytical ranges of the testing instruments. This dilution results in a proportional increase in the reporting limit.

Table A-10. Analytes, Primary MCLs (A), and Secondary MCL (B).

Analyte	Primary MCL	Secondary MCL	Analyte	Primary MCL	Secondary MCL
Vinyl Chloride	2 ug/L	None	p-Dichlorobenzene	75 ug/L	None
1,1-Dichloroethylene	7 ug/L	None	o-Dichlorobenzene	600 ug/L	None
Dichloromethane	5 ug/L	None	1,2,4-Trichlorobenzene	70 ug/L	None
Trans-1,2-Dichloroethylene	100 ug/L	None	Chloroform (1)	Total 1,2,3,4 = 80 ug/L	None
Cis-1,2-Dichloroethylene	70 ug/L	None	Bromodichloromethane (2)	Total 1,2,3,4 = 80 ug/L	None
1,1,1-Trichloroethane	200 ug/L	None	Chlorodibromomethane (3)	Total 1,2,3,4 = 80 ug/L	None
Carbon Tetrachloride	5 ug/L	None	Bromoform (4)	Total 1,2,3,4 = 80 ug/L	None
Benzene	5 ug/L	None	Chloride	None	250 mg/L
1,2-Dichloroethane	5 ug/L	None	Sulfate	None	250 mg/L
Trichloroethylene	5 ug/L	None	Nitrate/nitrite	10 mg/L as Nitrogen	None
1,2-Dichloro-propane	5 ug/L	None	Fluoride	4 mg/L	2 mg/L
Toluene	1,000 ug/L	None	Aluminum	None	50 -200 ug/L
1,1,2-Trichloroethane	5 ug/L	None	Antimony	6 ug/L	None
Tetrachloroethylene	5 ug/L	None	Arsenic	10 ug/L	None
Chlorobenzene	100 ug/L	None	Barium	2000 ug/L	None
Ethylbenzene	700 ug/L	None	Beryllium	4 ug/L	None
Total Xylenes	10,000 ug/L	None	Cadmium	5 ug/L	None
Styrene	100 ug/L	None	Chromium	100 ug/L	None

Table A-10, Continued. Analytes, Primary MCLs (A), and Secondary MCLs (B).

Analyte	Primary MCL	Secondary MCL	Analyte	Primary MCL	Secondary MCL
Copper	Action level = 1,300 ug/L (C)	1000 ug/L	Selenium	50 ug/L	None
Iron	None	300 ug/L	Silver	None	100 ug/L
Lead	Action level = 15 ug/L (C)	None	Thallium	2 ug/L	None
Manganese	None	50 ug/L	Zinc	None	5,000 ug/L
Nickel	100 ug/L	None			

Notes:

(A) Primary MCL = Primary Maximum Contaminant Level, a maximum concentration of a substance (other than lead or copper) allowed in public drinking water due to adverse health effects.

(B) Secondary MCL = Secondary Maximum Contaminant Level, a maximum concentration of a substance suggested for public drinking water due solely to unpleasant characteristics such as bad flavor or stain-causing ability.

(C) Action Level = the maximum concentrations of lead or copper permitted for public drinking water as measured at the user's end of the system. Water issuing from at least ninety percent of a representative sample of user's end outlets must contain copper or lead concentrations at or below their respective action levels.

mg/L = milligrams per liter.

ug/L = micrograms per liter.

The Department of Natural Resources is an equal opportunity employer and offers all persons the opportunity to compete and participate in each area of DNR employment regardless of race, color, religion, national origin, age, handicap, or other non-merit factors.